

Product Summary

Part 1 : Dimensions

Width	Aus Timber Designs: 182 Oak Designs: 228	mm
Length	1524	mm
Total Thickness	5	mm
Wear Layer	0.7	mm
Boards Per Box	6	planks
Box Size	Aus Timber Designs: 1.664 Oak Designs: 2.084	sqm

Part 2 : General Data

Core Type	PVC Vinyl with Fibre-Glass Mesh
Wear Layer	0.7mm
Finish	Matte Light Embossed
Installation Method & Adhesives	Full trowel installation (refer to installation guidelines) F. BALL F44 Styccobond Adhesive F. BALL F58 Styccobond Adhesive F. BALL F48 PLUS - High Temperature (for areas of high temperature variation and areas with exposure to sunlight) FLOOR+ F2000 Vinyl & Resilient Adhesive
Surface Coat	UV-cured Lacquer (with anti-stain coat)
Box Weight	182mm Wide Planks: 16.1KG 228mm Wide Planks: 20.1KG
Profile	Micro Bevel

Pattern Repeat	12 - 15 Pure Unique 72 - 90 Unique Prints (with pattern shifts down the plank) Note: This is approximately triple the standard unique prints available on a vinyl floor, showcasing greater print and colour variations.
-----------------------	---

Part 3 : Warranty

General Residential	25	Years
Commercial	By Application	Years



Part 4: Wet Pendulum Slip Test (AS 4586-2013)

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-000866
Issue Date : 2/04/2025
Print Date : 2/04/2025

**AS 4586-2013
Appendix A**

**Slip Resistance Classification of new Pedestrian Surface Materials
Wet Pendulum Test Method**

Date of Testing 01-04-2025
Operator AWTATest Operator 14
Test Temperature (20±5degC) 25 °C
Specimens Washed with pH Neutral Detergent then dried
Test Direction Length
Fixed/Unfixed Unfixed

Slider No 96 Batch No						33
Length	1	2	3	4	5	SRV
British Pendulum number	34	35	38	37	38	36

Classification P3

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023
Slider prepared using P400 and 3µm lapping film.


These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.



Part 5: Acoustic Testing

Technical Data Sheet - Standardised Impact Sound Pressure Level Impact Sound Insulation Testing of Floorboards VBL Import Pty Ltd T.A. EVERFLOOR

Testing Date: Friday, 7 February 2025
Test No.: 01
Client/Owner: VBL Import Pty Ltd T.A. EVERFLOOR
Testing Location: Residential apartment in Hurstville NSW
Floor Finish: 5mm Vinyl Plank Flooring
Acoustic Underlay: Nil
Sub-base & ceiling below: Reinforced concrete slab
Suspended ceiling cavity with plasterboard ceiling
Source Room: Living area on the upper floor level
Receiver Room: Living area on the lower floor level directly below
Approx. receiver room vol: 60.28

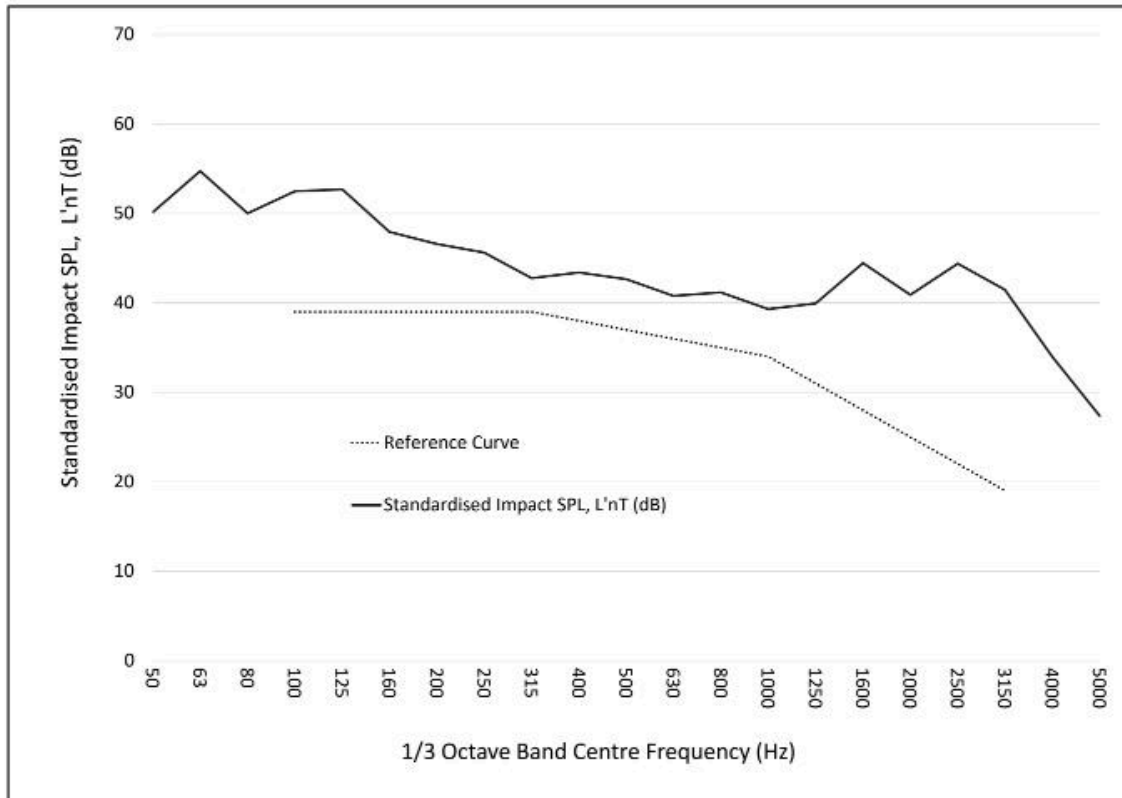

1/3 Octave Band Centre Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
L'nT [dB]	50.1	54.7	50.0	52.5	52.7	47.9	46.6	45.6	42.8	43.4	42.6	40.8	41.2	39.3	39.9	44.4	40.9	44.4	41.5	34.0	27.4

Acoustical Rating

Measured Weighted Standardised Sound Level Difference, L'nTw

50

Field Impact Isolation Class, FIIC

55

AAAC Star Rating

4

Reference/Guideline

AS ISO 717.2 - 2004

ASTME1007-14

AAAC Guideline

Testing Date : Friday, 7 February 2025
Reference No.: 3874
Testing Organisation: Contrix Pty Ltd
Tested By: Michael Fan Chiang
BE(Mech), MAAS

Contrix Pty Ltd
ABN: 95 632 593 625
E-mail: info@contrix.com.au
Tel: +61 425 240 555
www.contrix.com.au/acoustics

Disclaimers:

- The information provided in this report relates to sound insulation of floor coverings & underlays only.
- Contrix Pty Ltd does not provide products or installation services of hard floor coverings/underlay, therefore, not responsible or liable for any product defects.
- This testing report is site-specific and only applies to the subject premise for the tested product as specified in this document.
- It is imperative to strictly adhere to the installation guidelines provided by the supplier or installation instructions. Contrix Pty Ltd bears no liability in the event of non-compliance with these instructions.
- The acoustic rating typically varies by up to 3 L'nTw rating points, influenced by the placement of the tapping machine, testing locations within the unit, and the junction details between the floorboards, skirting, scotia, and walls. Many strata management and certifying authorities permit a tolerance of 3 L'nTw rating points. Furthermore, deviations of up to 5 L'nTw rating points have been recorded in rare cases.
- The use of any glue or adhesive can negatively impact the acoustic rating. Based on previous testing data, a degradation of up to 5 L'nTw rating points has been recorded.
- The test results detailed in this report are intended solely for use as design guidelines and should not be interpreted as formal certification of the tested products.
- It is highly recommended to engage a qualified acoustic consultant (Contact Contrix Pty Ltd on +61 425 240 555 or other qualified consultants) to conduct in-situ testing (field testing) prior to flooring installation.