
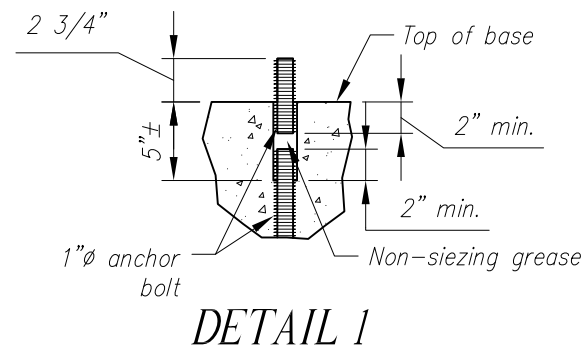
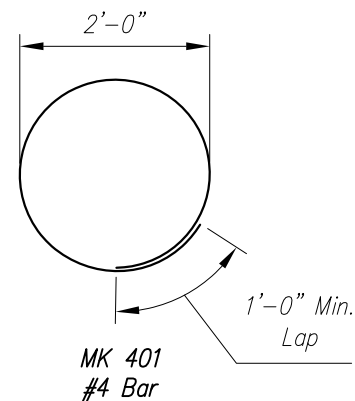
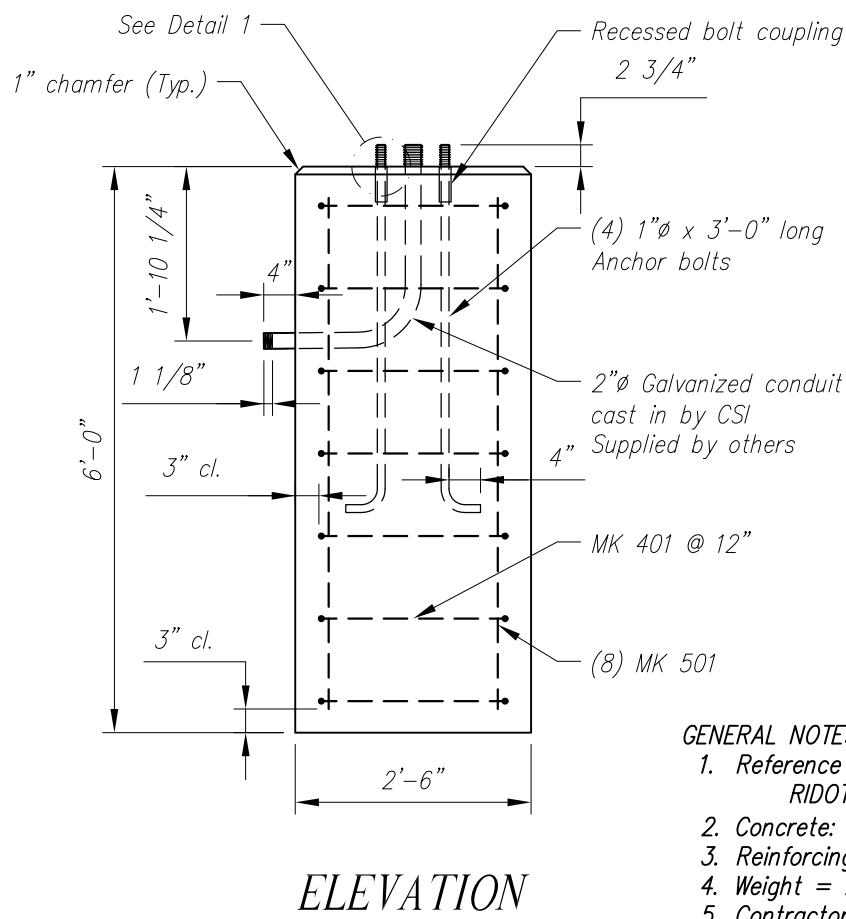
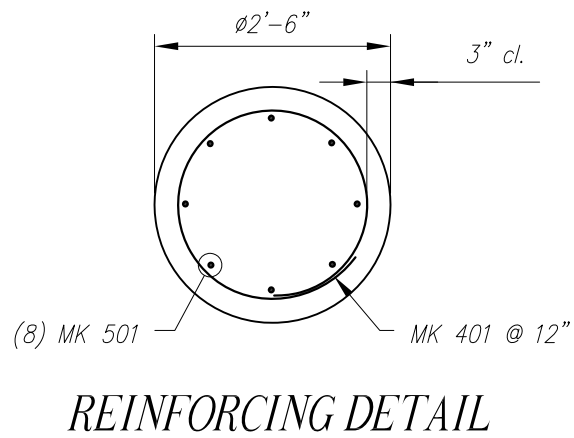


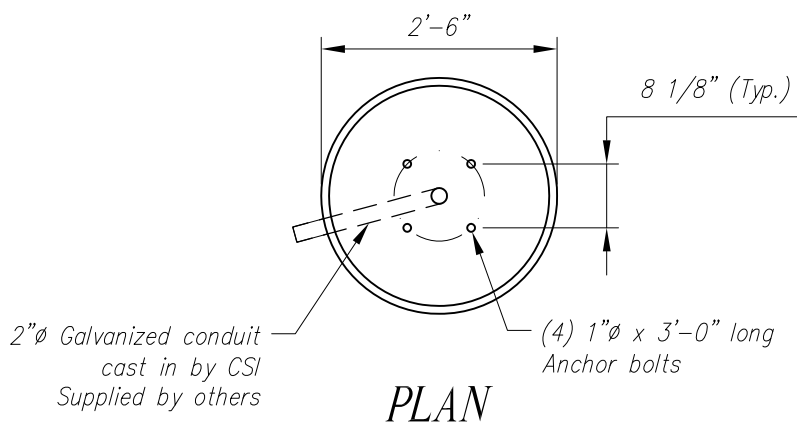

GENERAL NOTES:

- Reference Standard:
RIDOT Standard Details
- Concrete: Design strength $f'_c = 4000$ PSI
- Reinforcing: ASTM A615 GR 60 plain reinforcing
- Weight = 2.21 Tons
- Contractor to supply conduit, ground wire and template. Production will not begin until CSI receives these items.
- Production will be scheduled upon receipt of signed, approved shop drawings.
- Galvanized bolts on an 11 1/2" bolt circle shipped w/galv washers and galv hex nuts (bolts thread is 8NC), bolt material is 55 KSI min yield.

RIDOT STANDARD LIGHT POLE BASE
RIDOT STANDARD 18.1.0

CONTRACTOR:

STRUCTURE #:

JOB:

LOCATION:

CSI JOB #

Date

02/18/2010

Drawing No.

LPB30DIA72RI

Revision Date Revision



Concrete Systems Inc.
9 Commercial St., Hudson, NH, 03051
Phone 603-889-4163
Fax 603-889-2417