

DCLX-C-LED

Combo LED Exit/Emergency Light

Commercial, retail and industrial facilities that require battery backup emergency exit lighting and signage. Economical and attractive DCLX series uses a thermoplastic housing and solid-state electronics to offer both reliability and low cost performance.

FEATURES

PERFORMANCE

- Universal mounting canopy for top installation
- Wattage (Normal Operation)3.8W
- Wattage (Emergency Operation)15W
- Battery Lead - Calcium (2) 6V 4.5Ah
- Emergency Lamps(2) 6V 5.4W Incandescent T5 DC
- LED indicator light and push button test switch.
- Remote capability - may power additional remote heads (up to 6V 12W) with additional battery.
- LEDs mounted on printed circuit board - for exit sign.
- LED Lamps are operating in normal (AC input) and emergency (DC input) modes.
- May use additional battery, when adding remote light heads to the fixture. (Total 2pcs x 6V 4.5A Battery)
- Low voltage battery disconnection.
- 3 Year Warranty

Client:	
Order#:	
Project:	
Type:	



USA
Buy American
Act Compliant


5Yr
Warranty
(10 optional)

ORDERING INFORMATION

DECO / 3.8W / 120
SERIES PART # WATTAGE LETTERING VOLTAGE

FIXTURE SERIES	PART NUMBER	WATTAGE	LETTERING	VOLTAGE
DECO	82206	3.8W	Green	120-277V
DECO	82210	3.8W	Red	120-277V

Dimensions

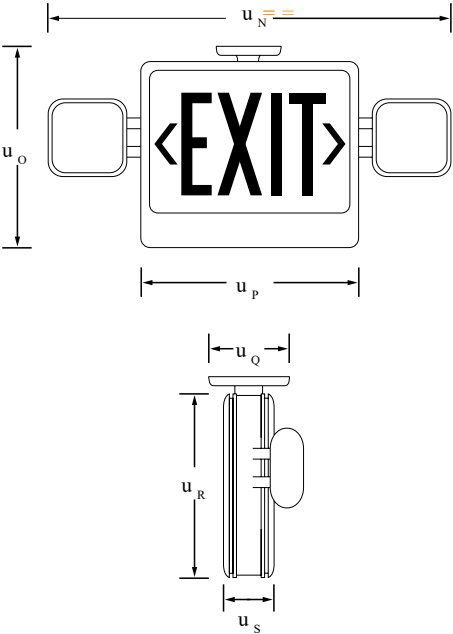

u_N	u_O	u_P	u_Q	u_R	u_S
22"	11"	13"	5"	10"	2.75"