

theranica

Nerivio[®]

A wireless non-invasive neuromodulation device for the acute and/or preventive treatment of migraine

USER MANUAL



© 2018 Theranica Bio-Electronics LTD. ("Theranica"), all rights reserved. The manual or any of its parts should not be reproduced without the written permission of Theranica.

Theranica reserves the right to change or improve its products and accompanying technical literature without notice.

Manufacturer:



Theranica Bio-Electronics LTD.

9 Granit St., North Industrial Park,

Caesarea, 3079893, Israel

Tel: +972-72-3909-763, Fax: +972-72-3909762

Web: www.theranica.com



2AOH8-NM



Table of content

1. Introduction	5
1.1. About this manual	5
1.2. Product overview	5
1.3. Product functions	6
1.4. Package content	6
2. Glossary	6
3. Labels and symbols	7
4. Safety	10
4.1. Conditions for use	10
4.2. Warnings, precautions and Adverse Events	10
5. What does the treatment feel like?	13
6. Using the device	13
6.1. Starting for the first time	13
6.2. Treating an ACUTE migraine Headache	Error! Bookmark not defined.
6.3. Treating FOR MIGRAINE PREVENTION	31
6.4. COMBINING ACUTE AND PREVENTATIVE TREATMENTS	32
6.5. Start a treatment	32
6.6. Storing the device for next use	39
6.7. Reviewing your migraine diary	39
7. Cleaning, maintenance and disposal	40
7.1. Cleaning and maintenance	40
7.2. Disposal	40
8. Troubleshooting	42
8.1. General	42
8.2. Main errors and messages	44
8.3. LED status	45
8.4. Customer support	45
9. Operation specification	47
9.1. Environment operating conditions	47
9.2. Environmental storage and transportation conditions between uses	47
9.3. Environmental transportation and storage conditions	47
9.4. Electrical properties	47
10. Technical specifications	48
11. Smartphone requirements	50
12. cybersecurity	50
13. Potential Adverse Reactions	51
14. Classification	51
15. EMC statement	52
15.1. Electromagnetic test result summary	53
15.2. Electromagnetic emissions	54

15.3. <i>Electromagnetic immunity</i>	55
15.4. <i>Recommended separation distances</i>	56
16. FCC radio frequency interference statement	56
17. Applicable standards	57

The remainder of this page is left blank intentionally

1. INTRODUCTION

1.1. ABOUT THIS MANUAL

This manual provides the information necessary for the user to effectively use the Nerivio® device.

- Do not attempt to perform any procedure before carefully reading all instructions.
- Always follow product labeling and the manufacturer's recommendations.
- For any inquiry, please contact customer support.

1.2. PRODUCT OVERVIEW

Nerivio is a wearable, battery-powered medical device for the acute and/or preventive treatment of migraine with or without aura in patients 8 years of age or older. Nerivio is controlled by a mobile application. The device is intended for self-administration in a home environment.

The device is worn on the upper arm and transmits transcutaneous remote electrical nerve stimulation by applying weak electrical pulses that invoke conditioned pain modulation (CPM) to inhibit migraine pain. Nerivio is intended for self-administration at the onset of a migraine episode.

The Nerivio system includes several main components:

1. The Nerivio device. The device is placed on the arm and produces electrical signals.
2. Armband and an extension. The armband should be wrapped around the device on the arm to improve the contact between the device and the skin, to secure its location on the arm and to conceal the device to enable a discreet treatment. Two armband extensions are provided for larger arm sizes.
3. Software application (app)
4. Carrying bag

The external side of the Nerivio device includes a power button and a LED indicator that signals various modes of operation. The internal side includes the electrodes that deliver neurostimulation signals. The armband secures the device in its location.

The device is controlled by an application which is installed on a smartphone. The application controls the device, retrieves operational records from the device and stores the data for further retrospective processing/reviewing.


The application enables the user to activate the stimulation, control the stimulation intensity, monitor the treatment duration and pause or stop the stimulation. The application also provides notifications and indications on the connection status and on the remaining number of treatments. It also offers a migraine diary feature which enables to track information about your migraine attacks. The device is good for 18 treatments of 45 minutes, provided average stimulation intensity is under 85%

1.3. PRODUCT FUNCTIONS

- The device is battery-powered; the battery is internal, integrated, and non-rechargeable.
- The device includes integrated electrodes, providing electrical stimulation to the skin.
- The device is activated by a power button.
- Armband which should be wrapped around the device on the arm to improve the contact between the device and the skin, to secure its location on the arm and to conceal the device to enable discreet treatment. An extension is also provided for larger arm sizes.
- An application (app) installed on a smartphone to control and monitor the treatment (as well as provide other features).

1.4. PACKAGE CONTENT

- 1 Nerivio® device in an aluminum bag
- 1 Armband
- 1 Armband extension
- 1 Carrying bag
- 1 QuickStart guide
- 1 Leaflet

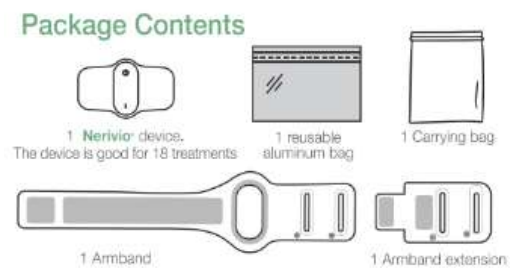

2. GLOSSARY

App: Mobile application running on smartphone

LED: Light-Emitting Diode

EMC: Electromagnetic compatibility


TENS: Transcutaneous electrical nerve stimulation

FDA: The Food and Drug Administration

FCC: The Federal Communications Commission


3. LABELS AND SYMBOL

Device Labeling Template (for reference only)

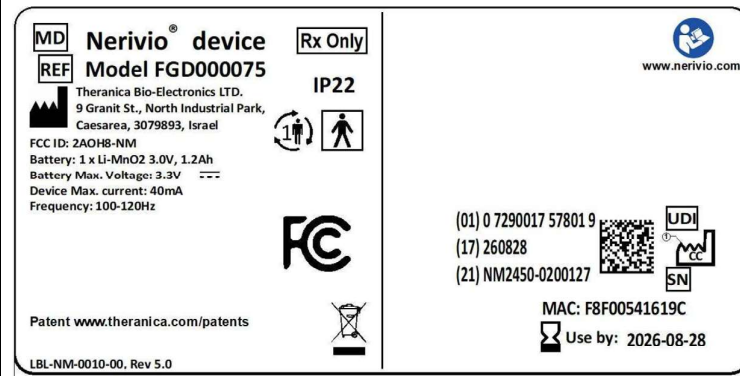

Symbol	Description
 www.nerivio.com	Read and fully understand user manual before using this device.
 www.nerivio.com	Electronic instructions for use are available within the Nerivio app
	Compliance with FCC Federal Communications Commission Class B – certified for home use FCC identifier: 2AOH8-NM
	Manufacturer
 YYYY-MM-DD	Country code (CC) and date of manufacture
	Type BF applied part (IEC60601-1)

Symbol	Description
	Catalog number
	Serial number
IP22	Ingress protection rating
	Use by date - indicates the date after which the device is not to be used
	Keep dry
	Temperature limits
	Humidity limitation
	Atmospheric pressure limitation
	Caution
	Keep away from sunlight
	Special requirements for waste of electrical and electronic equipment (WEEE Directive). This product must not be disposed of via municipal waste collection. Separate collection for electrical and electronic equipment waste per Directive 2012/19/EC in the European Union is required. Contact the manufacturer for details.
	Caution: Federal (US) law restricts this device to sale by or on the order of a physician.

Symbol	Description
	Fragile, handle with care
	Unique Device Identification. A series of numeric or alphanumeric characters that allows unambiguous identification of specific devices on the market
	Authorized Representative in the European Union
	Medical device
	The device may be used multiple times on a single patient
	The device is in conformity with the applicable requirements set out in with European Union Medical Device Regulation (EU) 2017/745 and other applicable Union harmonization legislation
	information about distributor
	information about importer
	ICASA—Tested to requirements of Independent Communications Authority of South Africa

4. SAFETY

4.1. CONDITIONS FOR USE

4.1.1. INDICATION FOR USE

Nervio is indicated for acute and/or preventive treatment of migraine with or without aura in patients 8 years of age or older. It is a prescription use, self-administered device for use in the home environment at the onset of migraine headache or aura for acute treatment, or every other day for preventive treatment.

4.1.2. CONTRAINDICATIONS

- I. The device should not be used by people with uncontrolled epilepsy.
- II. The device should not be used by people with an active implantable medical device, such as a pacemaker, hearing aid implant, or any implanted electronic device. Such use could cause electric shock, electrical interference or serious injuries or medical conditions.

4.2. WARNINGS, PRECAUTIONS AND ADVERSE EVENTS

The following icons are used throughout this user manual:



Warning: Indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.



Precaution: Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury to the user or patient or damage to the equipment or other property.



Note: indicates important information regarding the use of the system

Warnings



Do not attempt to perform any procedure before carefully reading all the instructions



Do not use the device on the heart, chest, neck, head or any other body location other than the upper arm, because this could cause severe muscle spasms resulting in closure of your airway, difficulty in breathing, or adverse effects on heart rhythm or blood pressure



Do not use the device over skin conditions, such as open wounds or rashes, or over swollen, red, infected or inflamed areas or skin eruptions or fragile skin on your upper arm at the treatment location



Do not share the device with other people. The device is intended to be used by a single person to avoid skin disease or any transmissible disease



Do not disassemble, crush, incinerate or short-circuit the battery. This could cause a fire, injury, burns, or other hazards

Precautions



The device has not been evaluated for use in people with congestive heart failure (CHF), severe cardiac or cerebrovascular disease



Federal Law restricts this device to sale by or on the order of a physician



The device should not be applied over areas of skin that lack normal sensation. If one upper arm is insensitive to physical sensation, use the other upper arm



Do not use the device over or in proximity to cancerous lesions



Do not use the device on an arm with a metallic implant. In such cases, consider using it on the other upper arm



Do not use the device simultaneously with another electrical stimulation device



Do not use the device while driving, cycling, or operating any vehicle or machinery



Do not use the device on wet skin or when bathing, showering, during exercise, while sweating or in high humidity



Do not use the device in the presence of electronic monitoring equipment (e.g., cardiac monitors, ECG alarms)



Do not use the device in a magnetic resonance imaging (MRI) environment



Please consult your HCP if you are pregnant or intend to get pregnant prior to using the device



The device has not been evaluated for use in people less than 8 years of age



Do not use the device past expiration date

- ! Check the device for damage, debris, and contamination. If the device is damaged, dirty or has any debris, please do not use it, and contact the manufacturer's customer support
- ! If the device was damaged, do not touch exposed electronics
- ! Do not use the device if the electrodes become significantly dirty or damaged
- ! Keep the device under the recommended environmental conditions specified in user manual to avoid any damage to the device
- ! Do not start a treatment before placing the device on your arm
- ! In case of device malfunction, remove the device from your arm and contact customer support
- ! It is recommended that your smartphone will be protected by a password (or other security mechanism) to refrain from unwanted people to activate the device
- ! Interference to Bluetooth connectivity may occur in the vicinity of equipment emitting RF (e.g., microwave, routers, Wi-Fi devices)
- ! To minimize moisture loss, when unused, the electrodes should be covered with the provided protective film and the device should be stored in its original package
- ! Do not expose the device to moisture and/or high humidity. If exposed, dry the device as soon as possible
- ! Before or after a treatment, rub the electrodes with your finger using a drop of water to improve their adhesiveness
- ! Do not clean the device with soap, alcohol, submerge in water, or scrub with abrasive material
- ! Do not disassemble or modify the device by yourself
- ! Do not attempt to recharge or detach the battery
- ! Keep the device out of the reach of infants, toddlers, children and pets
- ! The device uses Bluetooth technology; it may therefore be interfered by other equipment utilizing RF technology, even if the other equipment complies with CISPR emission requirements

-  The device should not be used adjacent to or stacked with other equipment and if adjacent or stacked use is necessary, the Nerivio should be observed to verify normal operation in the configuration in which it will be used
-  Do not use devices which generate strong electrical or electromagnetic fields, near the Nerivio device. This may result in incorrect operation of the device and create a potentially unsafe situation. In order to reduce the risk of EM interference, it is recommended to keep a minimum distance of 30 cm (12 inches) between the device and other electromagnetically radiating devices. Verify correct operation of the device in case the distance is shorter. During the immunity tests the device operated normally

Adverse reactions

During the treatment you might experience a temporary sensation of warmth, local tingling, numbness in the arm, pain in the arm, redness of the skin or muscle spasm, which should disappear shortly after the end of the treatment.

Consult with your healthcare professional if these reactions persist, if the migraine headache worsens, if an allergic reaction occurs, or if there are any other concerns. If a serious incident that is related to the device has occurred, please report it to the manufacturer and the competent authority of the Member State in which you are established.



Refer to Nerivio's website at <http://www.nervio.com/science/clinical-trials> for a complete listing of clinical data and adverse events information

5. WHAT DOES THE TREATMENT FEEL LIKE?

The device transmits electrical pulses. You may feel a strong sensation at first, but it will typically fade to a comfortable level after a couple of seconds. You will then need to set the treatment intensity level by increasing it to the highest level that feels strong yet comfortable and not painful (see instructions below). If the sensation is uncomfortable or painful, you should decrease the intensity. If you experience hand numbness and/or muscle twitching, try changing the location of the electrodes on the arm.

If a serious incident that is related to the device has occurred, please report it to the manufacturer and the competent authority of the Member State in which you are established.

6. USING THE DEVICE

6.1. STARTING FOR THE FIRST TIME

Before using the device for the first time, the Nerivio app must be installed, and the device should be connected to the app. ***Make sure that Bluetooth connection on your smartphone is enabled.***

Note - Children under the age of 12 should be guided by their parents the first time they use the device.



Do not attempt to perform any procedure before carefully reading all the instructions

6.1.1. DOWNLOADING AND INSTALLING THE APPLICATION

Step 1: Verify that your smartphone is compatible with the Nerivio app (refer to the frequently asked questions section (FAQ) section at www.nerivio.com for smartphone requirements).

Step 2: Download and install the Nerivio app via Google Play or App Store (depending on your operating system).



Figure 1 - Nerivio app Icon



Step 3: When you open the app for the first time, the **Welcome to Nerivio** screen is displayed. To create a new account, enter your first name, last name, email address, confirm your email address, and choose a password. Your password must contain at least 9 characters, including 1 number, 1 lowercase letter, and 1 uppercase letter. Tap *Next*.

After you tap **Create account**, a verification email will be sent to the email address you entered. Open the email and tap the link to complete your account verification. After verification is complete, a confirmation screen is displayed. Return to the Nerivio app to continue the account creation process. If you do not receive the email within 10 minutes, check your junk or spam folder. Make sure your smartphone or tablet is connected to the internet. If needed, return to the app and tap *Send again*

On the following screen, enter the requested details including gender, date of birth, country, phone number and Nerivio prescription type. Tap **Create account** to proceed.

You will then be asked to review the End User License Agreement and Privacy Policy. Tap **Accept & continue** to complete your registration. You must accept the EULA to use the App.

Welcome to Nerivio

Create your account to get started

First name

Last name

Email

Confirm email

Password

Use at least 9 characters, 1 number, and 1 uppercase letter.

Next

Already have an account? [Sign in](#)

Your information

A few details to set up your account

Gender

Male Female Other

Date of birth

DD MM YYYY

Country

USA

Phone number

+1

Nerivio prescription type

Acute

Create account

theranica

End User License Agreement and Privacy Policy

Last updated: May 11, 2026

PLEASE READ THE FOLLOWING CAREFULLY BEFORE INSTALLING AND/OR USING THE MOBILE APPLICATION AND/OR USING THE DEVICE.

By clicking the "accept" or "ok" button when creating a user account to use the Theranica mobile software application (the "App") you expressly acknowledge and agree that you are entering into a legal agreement with Theranica Bio-Electronics Ltd. ("Theranica", "we", "us" or "our"), and have understood and agree to comply with, and be legally bound by, the terms and conditions of this End User License Agreement ("Agreement" or "EULA"). "You" means each person who accesses or uses the App or the Services, including children for whom their parent or legal guardian have set up an Account on their behalf. Further, "your children" or "your child" refers to a child or children under your guardianship or supervision. You hereby agree to the collection, use, disclosure, and retention of your personal information as described in the Agreement. You agree to the collection, use, disclosure, and retention of your personal information as described in the Agreement. You agree to the collection, use, disclosure, and retention of your personal information as described in the Agreement.

Accept & continue

Decline

During the sign-up process, the app will send you a verification email to the email address which you have registered with. You will need to confirm this email to continue with the registration process. In case the verification email has not arrived within 10 minutes it is recommended checking junk emails or addressing the issue with internet provider to ensure it was not filtered out by spam filter.

Check your inbox

We sent an email with a link to verify your account. If you don't see it, check your spam folder.

Got it

Didn't get the email? [Send again](#)

If you already have an account, tap **Sign in** at the bottom of the screen and enter your email address and password.

It is possible to open an account for a child under the age of 12, but the process needs to be initiated by an adult caregiver, in the following manner:


1. Adult (parent) create their own account using the process above.
2. After logging transportation" -> "Account Settings". -> "Child accounts"
3. Start the process by clicking on "Add a child account" and follow the instructions there onwards.



Important note – make sure to connect the device for the first time using the children App account and not the parental App account. The device is personal and intended for a single user. Once connected for the first time, the device can't be transferred between accounts of different people.

6.1.2. CONNECTING THE DEVICE TO THE APP FOR THE FIRST TIME


Step 1: Press the power button to turn on the device. A slow flashing green light indicates the device is on.



Check the device for damages. If the device is damaged return it to the manufacturer or contact customer support

Step 2: Enable Bluetooth on your smartphone. Then, open the app and connect the Nerivio device to the app using the app instructions. The device and the smartphone should be in proximity of 1 inch (~2.5 cm) or less. It is recommended not to place the device on the arm during the first connection to ensure close proximity to the phone. As you begin using the app, it may ask for permissions. Please allow these permissions so that the app works properly. You will be notified when a connection established. A fast-flashing green light indicates the device is connected to the app.

Note that each device can only be associated with one user.

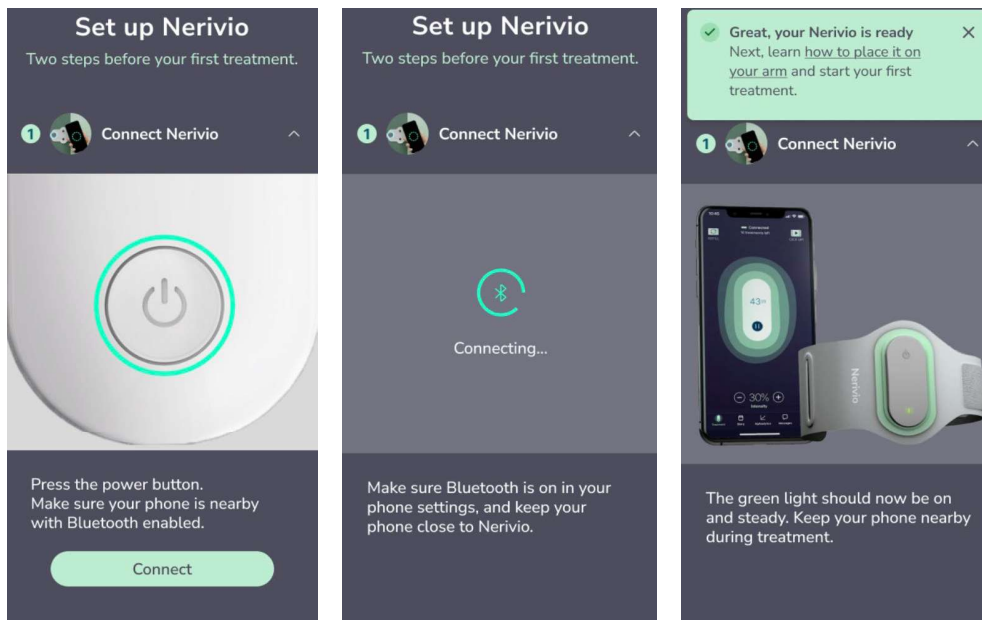

Check the device expiration date and recommended number of treatments that are indicated on the Refill Unit labeling.



Do not use the electrodes kit past expiration date or after recommended number of uses




6.1.3. WEAR NERIVIO


Note: The screens shown in this section are from the iOS version of the Nerivio app. The setup process is the same on Android, however the screens may appear slightly different.

Once your device is connected to the app, follow these steps to place it on your arm and start your first treatment.


Step 1: Remove the protective film from the device. Keep it to cover the unit between uses.

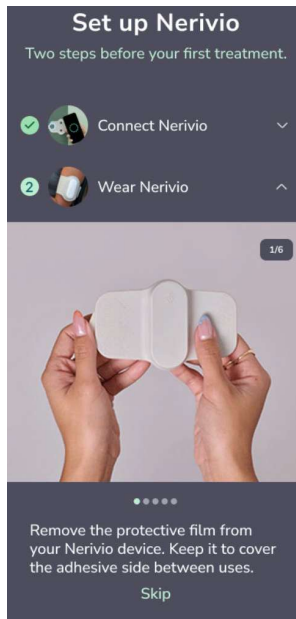


Step 2: Place your Nerivio device across your outer upper arm, midway between your elbow and shoulder.

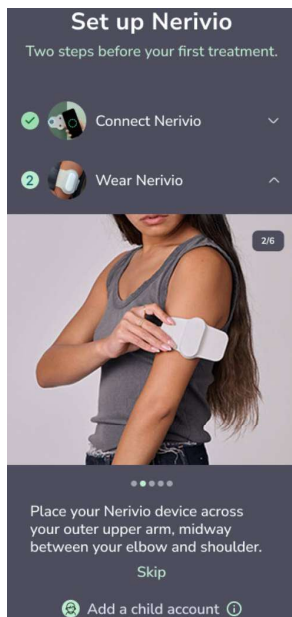


Step 3: Thread the end of the armband through one of the slots to create a loop that fits your arm. Use the extenders if needed.

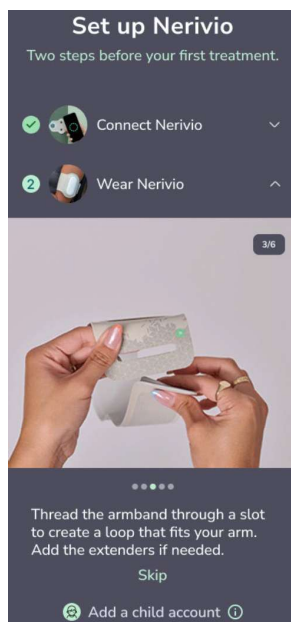

Step 4: Slide the armband up your arm until Nerivio sits on the two metal snaps. Adjust and close it.

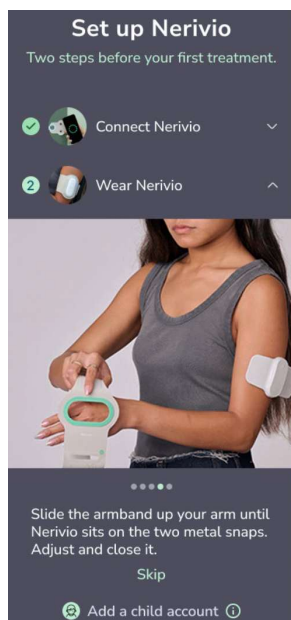

Step 5: Set the intensity that is right for you. The treatment starts at a default intensity of 12%. Increase or decrease using the + and – buttons until the stimulation feels strong but not painful, just below your pain threshold. Tap Ready to start when you are ready.

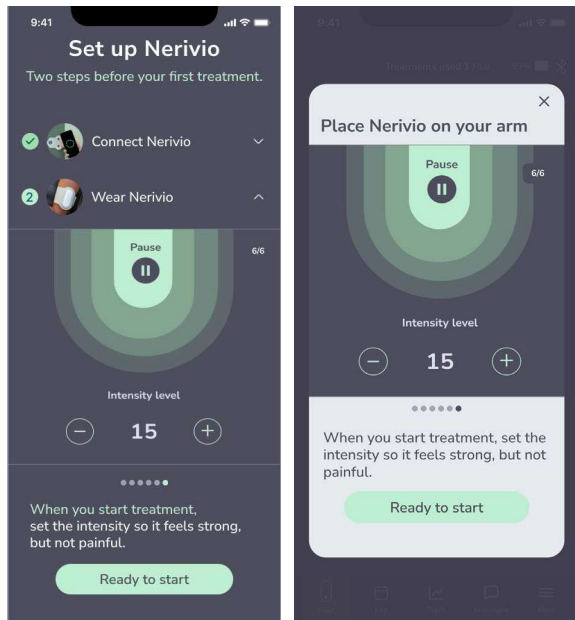


Step 6: When the 45-minute treatment is complete, the device will stop automatically. Remove the device from your arm. Cover the adhesive side with the protective film and return it to the aluminum bag for storage between uses.

If no treatment is started within 10 minutes, it will shut down automatically. Turn it on again to start a treatment.

6.1.4. THE APP SCREENS

The app includes:


- Treat tab (home screen),
 - Refill button
 - GIER button
- Log tab,
- Track tab
- Messages tab
- More tab

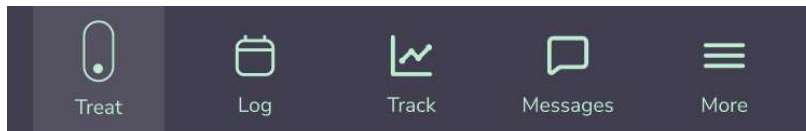


Treat tab – enables to initiate, control, monitor, pause and stop a treatment session. A battery charge status is available when the device is connected.



Intensity Tooltip – Next to the “+” button there’s a clickable tooltip that, when clicked, provides additional information and tips regarding how to set the intensity of the treatment. At least once, we recommend popping up the tooltip and reading through all the text.

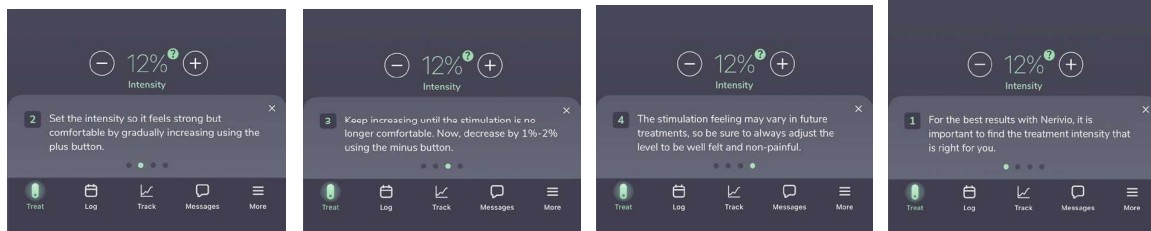

Refill button – displays the dispensing partner information for the provider that shipped your most recent Nerivio device. Use it when you want to refill a prescription or check an existing order.

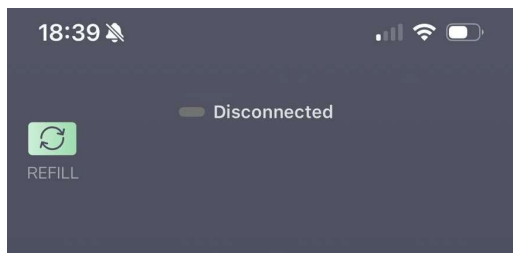

The GIER button – the Guided Imagery, Education and Relaxation (GIER) feature is an audio-visual module of guided imagery, relaxation and education, designed for use in


conjunction with the treatments. It includes a rich content library created by top headache psychologists. This content is available for free during your Nerivio treatments at home, on the go, and at your own pace.

Educational Content:

Understanding your migraine can be powerful for migraine management. Discover what happens in your brain during migraine attacks and how Nerivio works to prevent and abort attacks. Learn why it's important to match your lifestyle to the needs of your brain.

- **Guided Practices:**


Harness the power of science-backed behavioral strategies to reclaim control of your migraine. Follow expert-led sessions designed to reduce pain, stress, and tension through guided imagery, breathing techniques, muscle relaxation, and more.

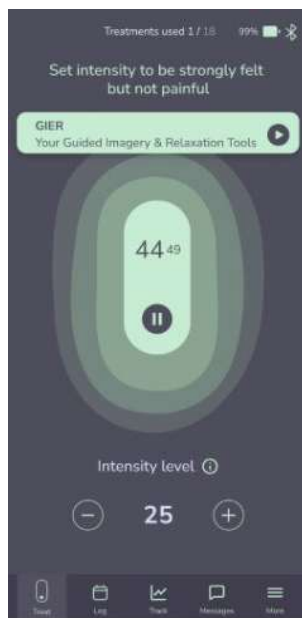

A)



B)

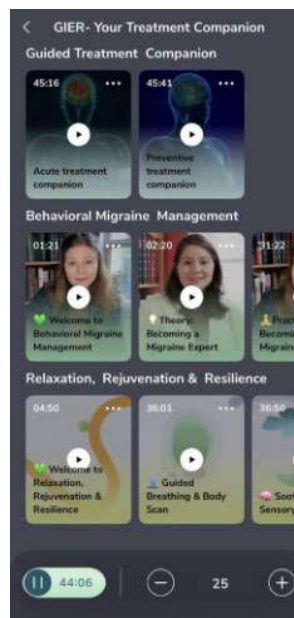

C)


From left to right:

A) The GIER UP! button is located at the top part of the treatment screen and is available a few seconds after the treatment starts.

B) The GIER welcome banner screen (shown 3 times only) provides the entry point to the GIER library.


C) Inside the GIER library you'll find a plethora of video sessions curated to themes.

Log tab – Enables you to track your treatment sessions and log your migraine headaches and symptoms. Clicking on Log will open a calendar in which all your treatment sessions and reported migraines are stored. The treatment sessions are marked as green dots on the treatments days and your daily logs are marked as white circle on the reported days.

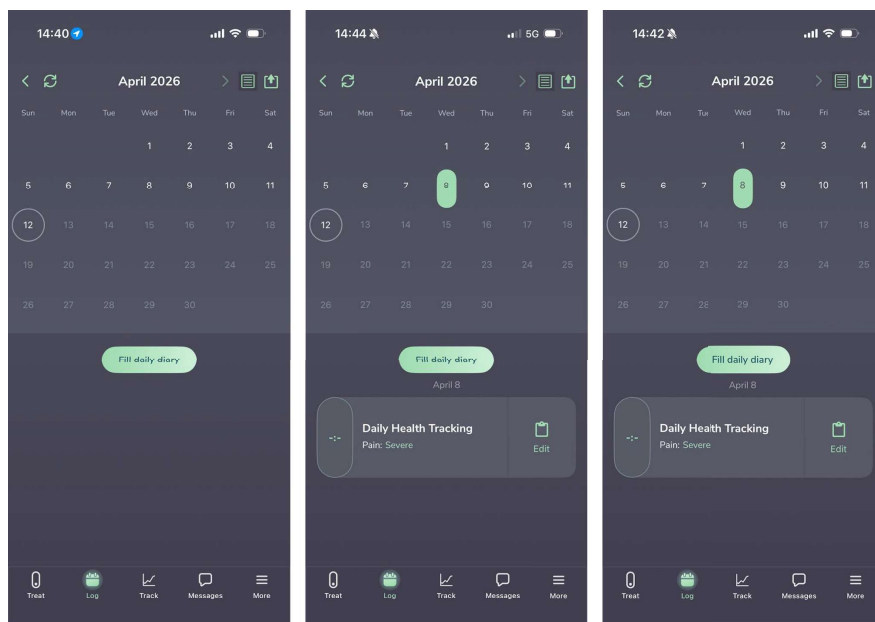


Clicking on the ‘Fill daily diary’ button will allow you to add a report of your migraine headache and other symptoms, regardless of whether you performed a treatment or not. This can be filled in daily, but not more than once a day.

The diary log information can be summarized in a table and exported and shared with your healthcare provider or any other caregiver. This is done by clicking the Share button icon on the top right, which enables you to download the file and save it locally or send it by email or any messaging app installed on your phone.

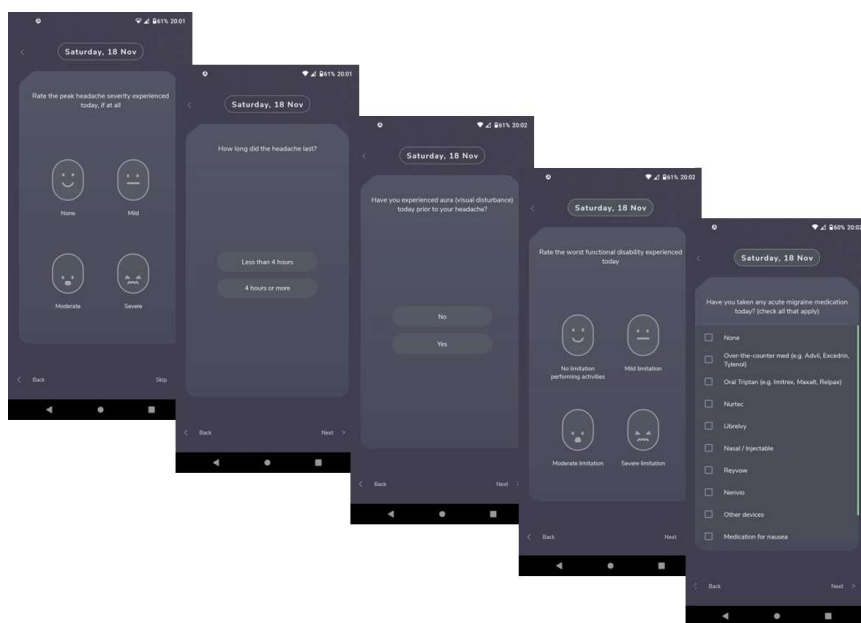

Track tab presents information about your migraine activity, Nerivio treatments, and preventive treatment consistency.

The information displayed in the Track tab is based on your app data including Log entries and treatment reports.

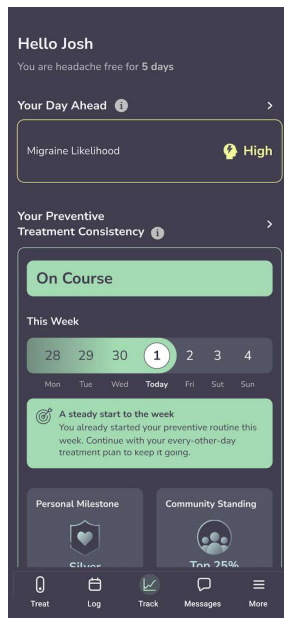

Your Day Ahead feature (located in the Track tab)

Your Day Ahead provides an outlook on your likelihood of experiencing a migraine attack in the next 24 hours, based on a machine learning (ML) algorithm (not a clinical diagnosis)

The ML algorithm analyzes patterns in your data entered in the app, including diary entries, treatment activity, and questionnaire responses, together with aggregated, de-identified historical data from Nerivio app users, analyzed in a compliant manner.

The algorithm uses up to 30 days of your recent data and updates the likelihood:

- Daily based on your most recent data
- Following new entries (e.g., diary or treatment reports)


To see your migraine outlook for the next 24 hours, complete at least one of the following:

- A pre-treatment questionnaire
- A diary entry with a pain level other than “none”

Migraine likelihood may be presented as:

- Low
- Moderate
- High

If there is no recent data, the app will display “No Recent Data”.

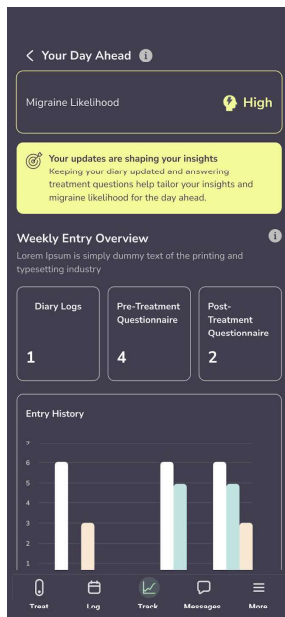

Preventive Treatment Consistency feature (located in the Track tab)


Preventive Treatment Consistency presents the level of your consistency with the every-other-day preventive treatment plan.

Consistency is calculated based on completion of treatments during the week and may be displayed as:

- Not Started
- Getting There
- On Course

The Track tab may also present:

- Personal Milestone – based on consecutive “On Course” weeks
- Community Standing – presents your ranking relative to other users, based on your preventive treatment consistency accumulated over time

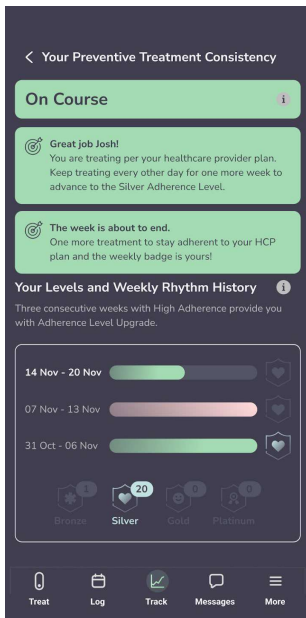


This feature is available for users who indicate they were prescribed Nerivio for migraine prevention or for dual use (acute and prevention). This feature can be disabled in Settings.

Migraine Patterns

Migraine Patterns presents a summary of your migraine data, including:


- Headache days and Nerivio treatments over time
- Data displayed across selectable timeframes
- Treatment outcome information based on log entries

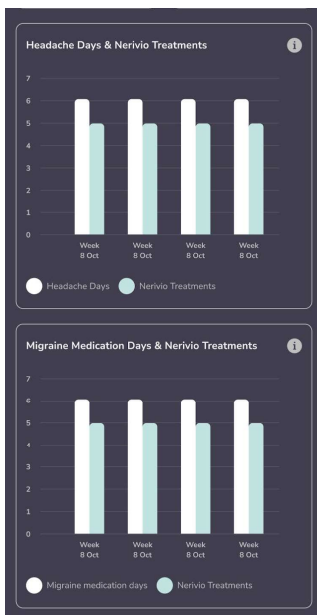

Sharing Information

The information presented in the Track tab can be exported to a PDF file and shared with your healthcare provider. To share your information:

- Tap the Share icon
- Download the file or send it using an email or messaging application installed on your phone

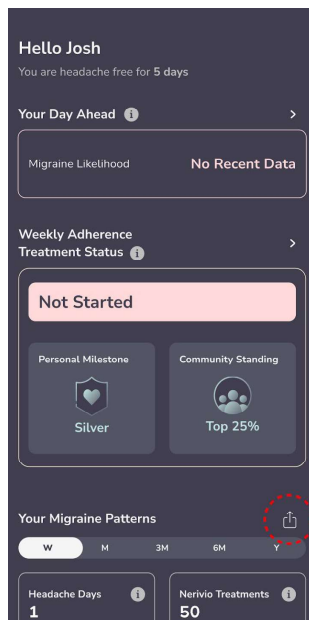


Your Migraine Patterns section (located in the Track tab)

This section presents a summary of your reported treatment outcomes and treatment timing during the selected period (Week, Month, 3 Months, 6 Months, Year).


Based on your pre- and post-treatment questionnaires, the app presents:

- Treatment Outcome: Headache – summarizes changes in your reported headache intensity
- Treatment Outcome: Other Symptoms – summarizes changes in your reported migraine-related symptoms. Outcomes are displayed as percentages (e.g., Helpful, Somewhat helpful, Not helpful).


The section also presents Acute Treatment Timing, which shows the percentage of Nerivio treatments you started within 60 minutes of migraine onset during the selected period.

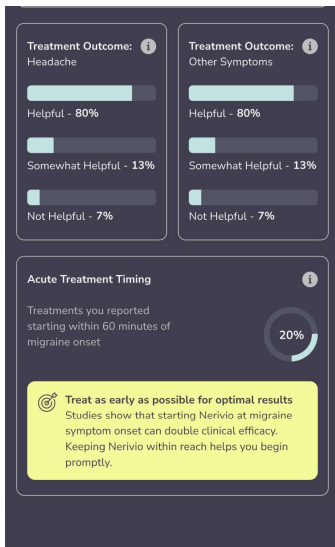

Messages tab – Provides access to in-app messages and important notifications about your treatments and Nerivio account.

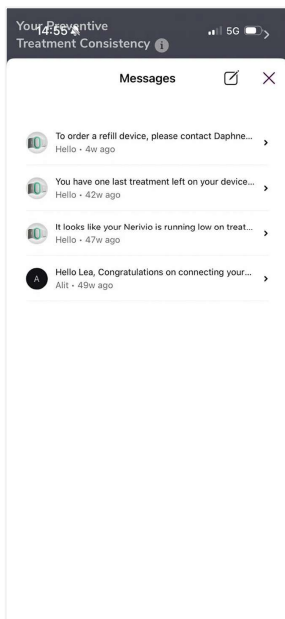


More tab - Provides access to your account information, app settings, and additional features

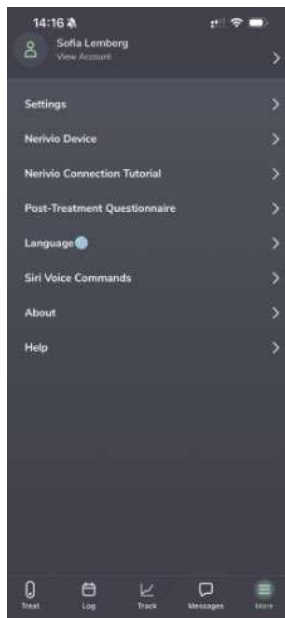

View Account – select this to view your account details.

Settings – select this to manage your preferences, including:

- Include your name in diary export
- Enable push notifications
- Enable app messages
- Enable Preventive Treatment Reminder – select this to enable or disable reminders for preventive treatment and to set a preferred reminder time.
 - Reminders are adjusted automatically based on your treatment activity to align with your prescribed preventive treatment schedule (e.g., every-other-day).

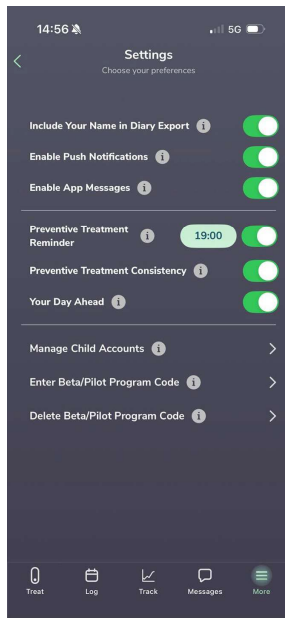

- Enable Preventive treatment consistency
- Enable Your Day Ahead
- Nerivio Device– select this to manage your Nerivio device, including:
 - Order Nerivio
 - Connect a New Device
 - Send logs

Post-Treatment Questionnaire – Select this to report your migraine symptoms after treatment. When available, a green badge will be presented on the More menu.

Language – Select this to choose your preferred language.

Siri Voice Commands – Select this to enable and manage voice commands.

- The Siri Voice Commands guide below (iOS only) – explains how to operate your Nerivio app and device using Siri voice commands. Commands can be issued in English or Spanish, and it is recommended to begin each command with the word “Nerivio” to ensure accurate recognition.

An example list of supported commands is provided in the following table:

command	Functionality	Command in English	Command in Spanish
Connect to a device	connect to the Nerivio device	Nerivio connect	Nerivio conectar
Start a treatment	start a Nerivio treatment with the default intensity (12%)	Nerivio start	Nerivio comenzar
Update intensity <value>	Update the intensity to a given value between 0-100	Nerivio change intensity to <value>	Nerivio Establecer intensidad a <valor>
Increase Intensity	Increase the intensity by 1%	Nerivio increase	Nerivio aumentar
Decrease Intensity	decrease the intensity by 1%	Nerivio decrease	Nerivio Disminuir
Pause	Pause a treatment	Nerivio pause	Nerivio Pausar
Resume	Resume a treatment	Nerivio resume	Nerivio reutilizar
Stop	Stop the treatment	Nerivio stop	Nerivio detener

6.2. ACUTE TREATMENT OF MIGRAINE ATTACKS

The treatment should be performed at the onset of a migraine headache. Treat as early as possible. For optimal results, start the treatment as soon as you experience the first symptoms of a migraine attack (such as headache or aura). The treatment duration is 45 minutes.

6.3. PREVENTIVE TREATMENT OF MIGRAINE

For migraine prevention therapy, the treatment should be performed every other day, regardless of your migraine status (e.g., whether you have a migraine or not on the day of the treatment).

Treatments can be performed at any time during the day; the most important thing is to pick a time that is convenient for you and stick to it. The Nerivio app offers treatment reminders, so you never miss treatment.

6.4. COMBINING ACUTE AND PREVENTATIVE TREATMENTS

- Use Nerivio every other day to help prevent migraine
- Use Nerivio as needed to treat a migraine attack

Example (if you are starting on Monday)

- Your schedule: Monday → Wednesday → Friday → Sunday

If a migraine attack happens on a scheduled day (e.g., Monday) and you did not perform your preventive treatment yet:

- If your migraine attack occurs before you start your preventive treatment, initiate the treatment as soon as you experience the first symptoms of a migraine attack (such as headache or aura).
- This treatment will count towards your preventive routine.
- Continue your schedule as planned:
 - Wednesday → Friday → Sunday

If a migraine attack happens on a scheduled day (e.g., Monday) and you already performed your preventive treatment:

- If your migraine attack occurs after you have completed your preventive treatment, you can initiate another treatment as soon as you experience the first symptoms of a migraine attack (such as headache or aura).
- Continue your preventive schedule as planned:
 - Wednesday → Friday → Sunday

If a migraine attack happens on a non-scheduled day (e.g., Tuesday):

- Start the treatment as soon as you experience the first symptoms of a migraine attack (such as headache or aura).
- Then continue using Nerivio every other day from your last treatment day
 - Thursday → Saturday → Monday


6.5. START A TREATMENT

Before you begin, make sure the smartphone Bluetooth connection is enabled.



Do not share the device. The device is intended for a single user.

Step 1: Check the device expiration date on the label located on the protective film and on the package.

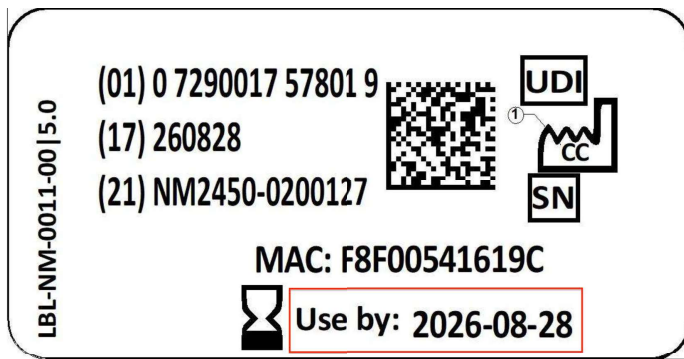


Do not use the device past expiration date

Step 2: Make sure that your arm skin is clean, dry, and free from lotion.

Step 3: Turn on the device. A slow flashing green light indicates the device is on. If the LED is still off or is solid green, please contact customer support.

Step 4: Open the app and confirm that the device is connected successfully. The connection status can be viewed in the app on the top of the treatment screen. Also verify that there is at least one remaining treatment.

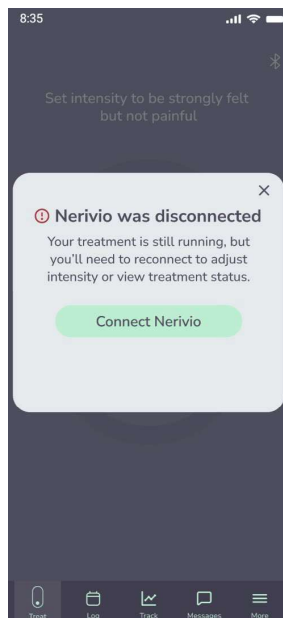

Step 5: Carefully remove the protective film from the electrodes and save it for storing the device and maintaining the electrode adhesiveness between uses.



Step 6: Place the device on your upper arm so that the electrodes are in contact with your skin and the LED indicator is facing outwards. The device should be located midway between the elbow and the shoulder. Place the device directly on the skin and not on your shirt.



Step 7: Adjust the armband to your size. There are 4 sizes you can choose from (S, M, L, XL). Attach the extension to the armband for L and XL sizes.



Step 8: Insert the strap to the buckle of your size.

Step 9: Wrap the armband around the device on your arm and fasten the strap. The armband will secure the device on its location and improve the contact between the device and your skin.



Do not use the device on the heart, chest, neck, head or any other body location other than the upper arm



Do not use the device over skin conditions, such as open wounds or rashes, or over swollen, red, infected or inflamed areas or skin eruptions or fragile skin on your upper arm at the treatment location



It is important to use the device only when positioned correctly on the arm. The device should be located midway between the elbow and the shoulder, on the outer side of the arm.

Step 10: To start the treatment, touch 'Start' in the treatment screen. The treatment has now begun and will stop automatically after 45 minutes. A slow flashing (mostly off) green light indicates the device is stimulating.



Do not start a treatment before placing the device on your arm



Do not use the device on wet skin or when bathing, showering, during exercise, while sweating or in high humidity



Do not use the device while driving, cycling, or operating any vehicle or machinery



Do not use the device if the electrodes become significantly dirty or damaged



If the device was damaged, do not touch exposed electronics



Do not use the device in the presence of electronic monitoring equipment (e.g., cardiac monitors, ECG alarms)



Keep the device in a dry environment. Moisture may damage the device



Do not use the device in a magnetic resonance imaging (MRI) environment




In case of device malfunction, remove the device from your arm and contact customer support



In case the device fails to properly adhere to the skin, rub the electrodes using a drop of water to improve their adhesiveness. If needed, contact customer support

Step 11: Set the treatment intensity level, so it feels strong yet comfortable and not painful. The treatment starts at a default intensity of 12%. Gradually increase the intensity as described below.

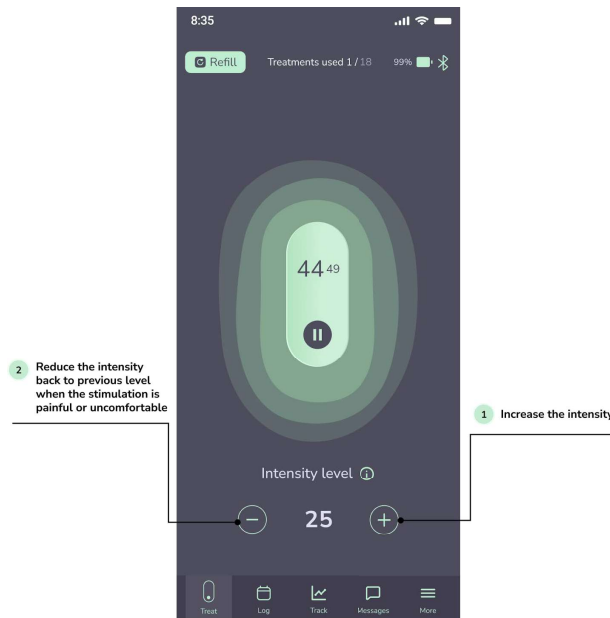

Setting intensity level:

- Start increasing the stimulation intensity using the "+" button. Each press will increase the intensity by 1 unit.
- When the stimulation is painful and/or uncomfortable, reduce the intensity to the previous level using the "-" button. Each press will decrease the intensity by 1 unit.
- Increase and/or decrease the stimulation intensity until you find the highest intensity that feels strong but not painful.



For effective and convenient treatment, the intensity level is individually set so it feels strong yet comfortable and not painful



You should monitor the activity of the device throughout its operation


Once you find the strongest and convenient stimulation intensity level, relax and continue with the treatment. If during the treatment the sensation is not strong, if it feels uncomfortable or painful, adjust the intensity level using the "+" and "-" buttons.

- The default starting intensity level is 12%.
- Note that long/continuous presses should be avoided.
- If you have significantly increased the intensity and still do not feel the stimulation, please refer to troubleshooting or contact customer support.

For your safety, the intensity will increase slowly. This gradual increase will be presented in the app by a flashing “increasing” indication that will stop once the desired intensity is reached.

Step 12: (* Available from 2nd treatment)

After the treatment has begun, questions on your migraine symptoms will be automatically displayed. You can record your migraine symptoms or skip this by touching “Next”.

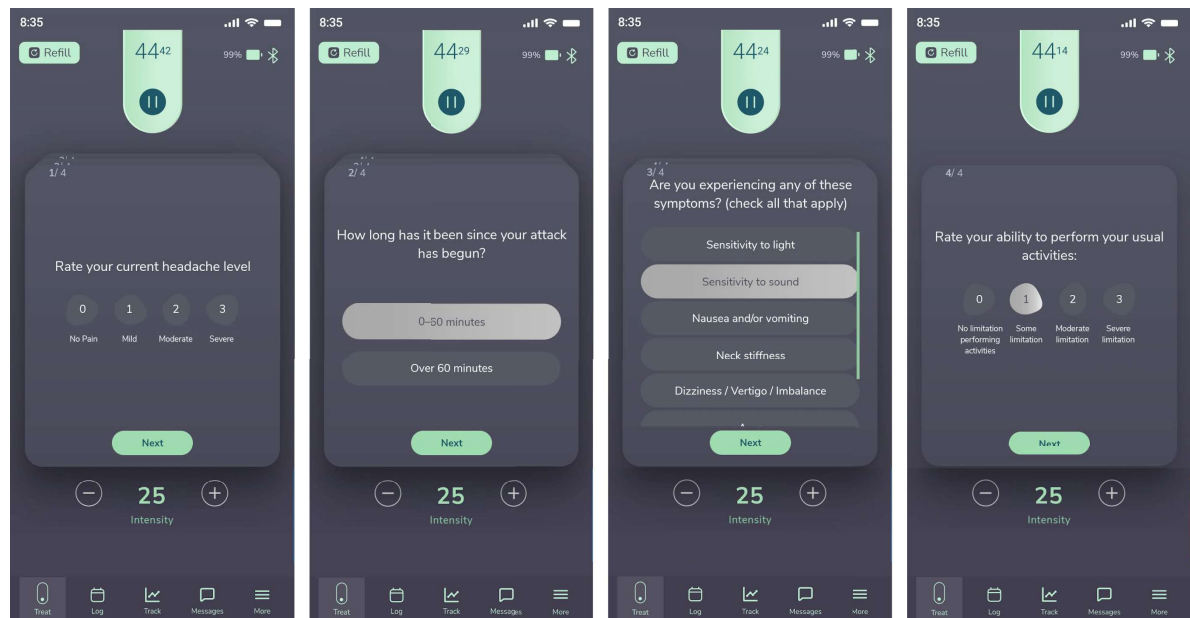

Note that the treatment is still in progress, and it can still be controlled by the app.


You can also record your symptoms post-treatment via notifications that will be sent or in the post-treatment assessment section in the More menu. If you report any pain level during the pre-treatment questionnaire, you will be presented with similar four questions 2 hours post-treatment that you can access via the More menu. The post-treatment questions will remain available for 24 hours, allowing you to respond at your convenience and to compare your symptoms status at the beginning and following the treatment.

6.5.1. TREATMENT IN PROGRESS

The progress of the treatment can be monitored by the specified time remaining of the total treatment duration time (45 minutes).

You can pause the treatment session for up to 5 minutes by touching the pause button. Press ‘Resume treatment’ to resume the treatment. Each session can be paused up to 3 times. If a treatment is not resumed within 5 minutes, it will be stopped automatically. When the treatment is resumed, the stimulation intensity will gradually increase to the level used before pausing the treatment. This gradual increase will be presented in the app by a flashing “increasing” indication that will stop once the desired intensity is reached.

The treatment can be stopped early at any time by touching the pause button and then “Stop treatment”. Do not remove the device from your arm before the treatment has ended or has been stopped, unless the treatment cannot be stopped in the app.

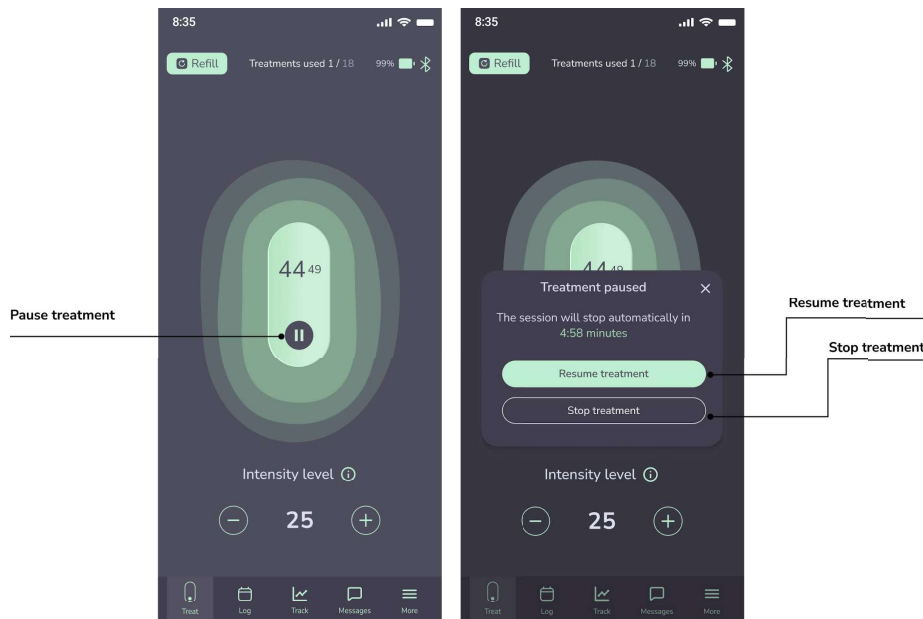

During the treatment, you may experience slight muscle spasm, numbness of the hand and irritation of the skin. These sensations should resolve soon after the end of treatment.

If you experience an uncomfortable or painful sensation that does not resolve by decreasing the intensity, stop the treatment in the app and remove the device from the arm.

- 
It is recommended that your smartphone will be protected by a password (or other security mechanism) to refrain from unwanted people to activate the device
- 
Interference to the Bluetooth connectivity may occur in the vicinity of equipment emitting RF (e.g. microwave, routers, WIFI devices)
- 
For effective results, it is recommended to avoid using other electrical devices during treatment
- 
If the device was on for over 3 minutes when no treatment was in progress, it automatically shuts down. Turn the device back on to start a treatment.
- 
If the “Stop” button does not respond, you can carefully remove the device from your arm

6.5.2. TREATMENT COMPLETED

Step 1: When the treatment is completed, remove the armband and the device from your arm. The device will turn off automatically one minute after the treatment session has ended (the green light will turn off).

Step 2: Apply the protective film on the electrodes (the protective film is reusable).

Step 3: Place the device in its original package (sealed aluminum bag) to store it for next use.

Step 4: Close the app.



If your migraine headache is not aborted 30 minutes following treatment, you may administer additional treatments.



Tips for Consecutive Treatments

At the end of an **acute treatment**, if you feel that additional treatment is required, wait at least 30 minutes before the next treatment. If you administer subsequent treatments, it is recommended to switch arms in between adjacent treatments, to reduce the likelihood of skin redness/rash or heat sensation on the skin. There is no need nor value in administering a total of more than 6 treatments on the same day.

6.6. STORING THE DEVICE FOR NEXT USE

Once the treatment has been completed, the device needs to be stored until the next treatment.

Step 1: Verify that the electrodes are covered with the protective film.

Step 2: Store the device in its original package (sealed aluminum bag) in an indoor environment, away from direct sunlight and according to storage environment conditions specified in this user manual.



To minimize moisture loss, when unused, the electrodes should be covered with the provided protective film and the device should be stored in its original package



Do not expose the device to moisture and/or high humidity. If exposed, dry the device as soon as possible



The device should be stored and cleaned according to the recommended conditions describe in the user manual

6.7. REVIEWING YOUR MIGRAINE DIARY

Keeping detailed records of migraine episodes can help in migraine management. The symptoms recorded during a treatment will be saved in a migraine diary that can be reviewed at any time via the app. Touch “Diary” to review your migraine symptoms.

You can also report on a daily basis (but not more than once a day), a set of migraine symptoms including your current migraine headache, to record your symptoms in the diary even if the device is not used.

You can view and edit these reports at any time from the ‘Diary’ tab in Nerivio app.

To help you track your migraine headaches, the app will provide notification to fill your symptoms at 2 hours after a treatment session (provided that some level of pain was reported during the treatment) or a reported migraine headache. You can disable these notifications in the smartphone settings.

7. CLEANING, MAINTENANCE AND DISPOSAL

7.1. CLEANING AND MAINTENANCE

- The device can be cleaned with a dry cloth (except for the electrodes).
- If the electrodes begin losing adhesion, gently rubbing one or two drops of water onto the gel surface may extend usage. Wait for about 30 minutes before placing the protective liner. The refresh process can be repeated multiple times if adhesion is not resorted.
- The armband can be washed with water and soap only. No bleach products should be used. Do not tumble dry. Do not iron.
- To minimize moisture loss, when unused, the electrodes should be covered with the provided protective film and the device should be stored in its original package (zipped aluminum bag).
- Contact customer support if the package and/or device labeling are damaged.
- The lifetime of the electrodes varies depending on skin conditions, skin preparation, storage and climate.
- The app can be updated using the standard update procedure of the mobile operating system.



Before or after treatment, rub the electrodes using a drop of water to improve their adhesiveness.



After rubbing electrodes with water, wait for 30 minutes for water to absorb before next use or applying protective liner.



Do not clean the device with soap, alcohol, submerge in water, or scrub with abrasive material



Do not disassemble or modify the device by yourself

7.2. DISPOSAL



- This product should be disposed of in accordance with all applicable federal, state and local regulations related to the disposal of electronic equipment and batteries.
- If the battery has been fully discharged before use, before product expiration date or before 18 treatments have been performed, please contact customer support.
- Contact customer support for further information on the appropriate disposal of device components.

8. TROUBLESHOOTING

This section lists problems or observations that you may have, the possible cause(s) and recommended actions. Before addressing the troubleshooting table, please check and confirm the following:

1. Make sure that Bluetooth connection is enabled in your phone.
2. Make sure that there are treatments left in your device.

8.1. GENERAL

Problem	What it may mean	What to do
The device does not power on	The device is not working	Contact customer support in your region. See section 8.4.
	The power button was not held long enough	Press the power button continuously for 2-3 seconds
The device does not turn off	Nerivio has automatic shut off features	• The first time the device is turned on to pair and set up, the device will shut off automatically after 10 minutes. • For all subsequent treatments, the device will give you 3 minutes to start the treatment. • If you pause the device during a treatment, the device will automatically shut off after 5 minutes if treatment is not restarted. • At the end of any treatment the device will automatically turn off after one minute. These built-in timers will not impact the device's ability to provide twelve 45-minute treatments.
The LED is flashing very rapidly (5 times per second)	There is an error message on the screen	Connect the app to the device. View the error message in the app and follow the instructions. If the error does not appear on the screen, wait for the device to automatically turn off and then turn it back on
	There are no treatments left in the device	Connect the app to the device. Check in the app how many treatments you have left. The device is good for 18 treatments of 45 minutes, provided average stimulation intensity is under 85%. If there are no treatments left, dispose of the device.

Problem	What it may mean	What to do
The LED is solid green	Device malfunction	Contact customer support in your region. See section 8.4.
The device does not connect to the app	The device is turned off	If the LED is off, turn on the device
	Bluetooth connection is disabled on the phone	Enable the Bluetooth feature on your phone and try to reconnect
	The phone and the device are not close enough	Remove the device from your arm. Bring the phone closer to the device, to a range of 1 inch (2.5 cm)
	The device was automatically shut down since the treatment ended or has not been initiated for a prolonged duration of time.	If the LED is off, turn on the device
	The smartphone has been previously paired with a different device	Here are some steps you can try to resolve the connectivity issue. 1. Go to the Bluetooth settings on your phone and remove the device (on iPhone click info icon then forget device / on Android click gear icon then unpair). 2. Then turn on the device and the Bluetooth on your phone and pair (please be sure the phone and the device are side by side when you pair). 3. If the device does not connect go to the More menu at the bottom of the Nerivio App, select Nerivio device and then select Connect a new Nerivio device. 4. If you still cannot pair, do a total shutdown of your phone, restart your phone and try to pair.
	General issues related to the Bluetooth on your smartphone	Here are some steps you can try to resolve the connectivity issue. Please do not skip any steps: 1. Turn your phone off, turn your phone back on. 2. Turn Bluetooth off and back on again in the settings menu. Do not try to pair the device from the Bluetooth menu. 3. Turn on the device and pair (please be sure the phone and the device are side by side when you pair). 4. If the device does not connect go to the More menu at the bottom of the

Problem	What it may mean	What to do
		Nerivio App, select Nerivio device and then select Connect a new Nerivio device. If you still cannot pair, reset network settings on your smartphone
The stimulation is not felt	The treatment has not started yet or has been stopped or paused	Touch “Start” or “Resume treatment” in the “Treatment” screen
	The stimulation intensity is too low	Increase the stimulation using the “+” button in the treatment screen, until you feel the stimulation
	The protective film was not removed	Remove the protective film from the electrodes
	The electrodes begin losing adhesion	Gently rub with your finger one or two drops of water onto the gel surface of the electrodes. Wait for 10 minutes for better effect. You can repeat this process several times to improve dry electrodes adhesion.
	The adhesive surface of the device is damaged	Replace the device

8.2. MAIN ERRORS AND MESSAGES

Errors and messages displayed on the screen	What it may mean	What to do
Nerivio is not properly placed. Make sure that the protective film was removed and that the electrodes are in contact with your skin	The device is not properly placed on the arm and/or the electrodes are not in contact with your skin	Make sure the protective film was removed from the electrodes. The device should be placed directly on the skin of the arm
No treatments left	No remaining treatments	The device cannot be used. Replace the device or order a new device.
Nerivio is shutting down since no treatment is performed. Turn it back on to start a treatment	The device was on for a specific duration of time and no treatment was performed	Turn on the device

Errors and messages displayed on the screen	What it may mean	What to do
No Nerivio devices were found	Bluetooth is off	Enable Bluetooth on your smartphone
	The device is turned off	Turn on the device
	The device is too far from the smartphone	Bring the phone closer to the device, to a range of 1 inch (~2.5 cm)
Authentication failed	The device has already been associated with a different user	Connect to a different Nerivio

8.3. LED STATUS

LED indication	Status
Flashing very rapidly (5 times per second)	The device is shutting down or an error occurred or there are no treatments left in the device
Solid green	Device malfunction
Flashing slowly (mostly on)	The device is ready to be connected to the app
Flashing rapidly	The device is connected to a smartphone
Flashing slowly (mostly off)	The device is in a treatment process

8.4. CUSTOMER SUPPORT

Customer support is available to answer any questions you may have about your Nerivio device.

The service lifetime of the Nerivio is until product expiration date.



The battery operation time is 810 minutes (i.e., 18 treatments of 45 minutes) if stored at ambient temperature of $23 \pm 2^{\circ}\text{C}$, provided average stimulation intensity is under 85%

Local support in the region can be obtained according to the following table.

For any territory that is not listed, please use Global Inquiries.

Global Inquiries	
Theranica Bio-Electronics LTD. Address: 9 Granit St., North Industrial Park, Caesarea, 3079893, Israel Email: info@theranica.com Web: www.theranica.com Fax: +972-72-390-9762	
USA	Israel
Theranica USA Inc. Address: 100 Somerset Corporate Boulevard 2nd Floor – Suite 160 Bridgewater, NJ 08807 USA Nervio Cares Customer Support: Phone: 1-937-637-4846 Email: support@nervio.com	DaphneMed Agencies LTD. Phone: +972- 54-5996029 +972-77-3630400 Web: https://www.nervio-il.co.il Email: info@daphnemed.com
Germany	India
betapharm Email: kontakt@nervio.de Phone: 0800 589 26 38	Dr. Reddy's Labs India, and Portea Phone: 1800-123-2360 Email: nerviodr@porteamedical.com
South Africa	Spain
Dr. Reddy's Laboratories (Pty) Ltd. Phone: 018 011 5205 Email: support@nervio.co.za Web: www.nervio.co.za	Reddy Pharma Iberia S.A. Email: soportepacientes@nervio.es Phone: 93-355-49-16
Hong-Kong, Macau and China	United Kingdom
PIER 88 HEALTH HONG KONG LIMITED Local Responsible Person (LRP) Phone: +852 60548188 Email: nervio@pier88health.com	Dr. Reddy's Laboratories (UK) LTD Email: info@nervio.co.uk Web: www.nervio.co.uk

Support information for your local region may be updated from time to time. For the most up to date listings, please refer to <https://www.nervio.com/international-availability>

9. OPERATION SPECIFICATION

9.1. ENVIRONMENT OPERATING CONDITIONS

Operating temperature range:	+5° to +40° C (41°F-104°F)
Relative humidity range:	35%-70% RH, with no condensing
Atmospheric pressure:	70-106 kPa

9.2. ENVIRONMENTAL STORAGE AND TRANSPORTATION CONDITIONS BETWEEN USES

Temperature range:	+10° to +27° C (50°F-80.6°F)
Relative humidity range:	40%-70% RH, with no condensing
Atmospheric pressure:	70-106 kPa

9.3. ENVIRONMENTAL TRANSPORTATION AND STORAGE CONDITIONS

Temperature range:	+10° to +27° C (50°F-80.6°F)
Relative humidity range:	40%-70% RH, with no condensing
Atmospheric pressure:	70-106 kPa

9.4. ELECTRICAL PROPERTIES

Battery type:	Primary cell Li-MnO ₂ , 3.0 V, 1.2 Ah
Maximum Voltage:	3.3V
Maximum Current	40mA
Frequency	110Hz
Charger Input:	N/A – the battery is not rechargeable in the device.
Charger output:	N/A – the battery is not rechargeable in the device.
Battery lifetime	810 minutes if stored at ambient temperature of 23 ± 2°C.



Do not disassemble, crush, incinerate or short-circuit the battery. This could cause a fire, injury, burns, or other hazards.



Do not attempt to recharge or detach the battery



Recycle or dispose the device in accordance with disposal instructions in the user manual

10. TECHNICAL SPECIFICATIONS

Number of channels	1
Waveform	Biphasic rectangular
Net charge (μC per pulse)	0 (charge is balanced by using a symmetrical, biphasic pulse)
Max output voltage	
500 Ω	20V
2K Ω	60V
10K Ω	60V
Max output current	
500 Ω	40mA
2K Ω	30mA
10K Ω	6mA
Maximum phase charge 500 Ω	8 μC
Maximum average current 500 Ω	1.76mA
Maximum current density (peak) 500 Ω	1.6 mA/cm ²
Maximum current density (r.m.s) 500 Ω	0.34 mA/cm ²
Maximum average current density (abs value) 500 Ω	0.07 mA/cm ²
Maximum average power density 500 Ω	1.41mW/cm ²
Frequency	110Hz
Primary phase duration [μSec]	200
Pulse duration [μSec]	400
Burst mode	No
Program duration [min]	45
Electrode area	25cm ²
Electrode compliance with 21 CFR 898	Yes

Electrode cable	No	
Indication display	Device LED	Via the mobile application, if connected
-On/off status	Yes	Yes
-Wireless connection	Yes	Yes
-Low battery	No	Yes (remaining number of treatments)
-Current level	No	Yes (stimulation intensity)
-Output mode	Yes	Yes (stimulation time indicator)
-Time to cut-off	No	Yes (stimulation time indicator)
Power source	Integrated, non-rechargeable, primary cell Li-MnO ₂ battery Operation time: 810 minutes (i.e. 18 treatments of 45 minutes), provided average stimulation intensity is under 85%*. *Usage at average intensity above 85% will reduce the number of treatments. The expected number of 45-minute treatments may be in the range from 15 to 18.	
Processor control	Yes	
Wireless control	Yes	
Wireless communication	Frequency range: 2.400-2.4835 GHz Modulation: Gaussian frequency shift Output power: ≤0 dBm	
Automatic overload trip	Yes, limiter for max current and voltage	
Automatic no load trip	Yes, out-of-range load detection	
Automatic shutdown	Yes, timer	
Simulation intensity control	Yes, current amplitude is adjustable by the user	

Wireless communication interference

This device operates in the 2.400-2.4835 GHz ISM band. In case this device is used around other wireless devices such as microwave and wireless LAN, which operate at the same frequency band as this device, interference between this device and such other devices may occur. If an interference occurs before the treatment has begun, the treatment may not start. Once the treatment has started, the device maintains the treatment parameters (shape and frequency of pulses during stimulation, intensity and duration) autonomically and does not require any further control. However, the app may not enable you to stop the treatment or adjust the intensity, which may result in an uncomfortable feeling. If such a sensation occurs, please remove the device from your arm without

touching the electrodes, stop the operation of the other devices or move away from the interfering source.

11. SMARTPHONE REQUIREMENTS

Refer to frequently asked questions (FAQ) section at www.nerivio.com/ for smartphone requirements

12. CYBERSECURITY

The Nerivio system software is comprised of the Nerivio device embedded software (“Firmware”), an application backed service (“Backend”) hosted on Amazon Web Services and operated by the company, and an application frontend (“Client”) hosted by Nerivio mobile application on the user’s smartphone. The Nerivio is a closed system, which does not allow installation of additional external components, nor the ability of the user to upgrade or modify the device Firmware or Backend. The Client software exposes only a user interface (UI).

The Backend is accessible only to authorized company personnel over a secure HTTPS communication channel. The company operates the Backend and assumes full responsibility for maintaining its cybersecurity, including patching, and securing the infrastructure and application code, as well as security incidents management.

The Client software runs on a mobile platform that is the responsibility of the user. The device Firmware and the Client software are not designed to detect or report on security events. The company recommends selecting a strong user password when creating Nerivio account and protecting your mobile platform by a password (or other security mechanism) to refrain from unwanted people to activate the device or access your personal information. To verify user’s account validity, the Nerivio system includes authentication and verification through the user’s email.

Instructions for Security

The following cybersecurity controls are recommended to increase cybersecurity of the Client software and user’s mobile platform:

- The mobile platform should require authenticated access via user credentials. You are advised to lock your smartphone with a password or any other means (e.g. biometric, pin code or other).
- Restrict unauthorized physical access to the mobile platform and Nerivio device.
- Keep the mobile operating system on the mobile platform up to date with the latest security updates. Don’t “Jailbreak”, “Root” your mobile platform, or install unreleased (e.g. beta) or unofficial operating system versions.
- Download the Nerivio mobile application only from an official application store outlined in this user manual.

- Keep the Nerivio application software up to date. It is recommended to allow an automatic upgrade of Nerivio mobile application on your mobile platform.
- When creating the Nerivio account choose a strong password. The password must be at least 9 alpha-numeric characters including at least 1 uppercase letter, at least 1 lowercase letter and at least 1 numeric digit.



It is recommended that your smartphone will be protected by a password (or other security mechanism) to refrain from unwanted people to activate the device

For additional information on data protection and privacy refer to www.nerivio.com privacy policy.

13. POTENTIAL ADVERSE REACTIONS

- People with sensitive skin may experience a rash or redness of the skin under the electrodes.

14. CLASSIFICATION

- Internally powered ME Equipment
- Type BF applied part
- Enclosure IP22
- Continuous operation

15. EMC STATEMENT

With the increased number of electronic devices such as PC's and mobile (cellular) telephones, the Nerivio device may be susceptible to electromagnetic interference from other devices, even if they comply with CISPR emission requirements. Electromagnetic interference may result in incorrect operation of the Nerivio device and create a potentially unsafe situation.

The Nerivio device should not interfere with other devices.

In order to regulate the requirements for EMC (Electro Magnetic Compatibility) with the aim to prevent unsafe product situations, the IEC60601-1-2 standard has been implemented. This standard defines the levels of immunity to electromagnetic interferences as well as maximum levels of electromagnetic emissions for medical devices.

The Nerivio medical device conforms with the IEC60601-1-2 standard for both immunity and emissions.

The Nerivio device requires special precautions regarding EMC and needs to be installed and used according to the EMC information provided in this manual:

- Do not use any unspecified accessories with the Nerivio device. This may result in increased emissions or decreased immunity of the device.
- The Nerivio device should not be used adjacent to or stacked with other equipment. In case adjacent or stacked use is necessary, the Nerivio device should be monitored to verify normal operation in the configuration in which it is used.
- Do not use devices which generate strong electrical or electromagnetic fields in proximity to the Nerivio device. This may result in incorrect operation of the device and create a potentially unsafe situation. In order to reduce the risk of EM interference, it is recommended to keep a minimum distance of 30 cm (12 inches) between the device and other electromagnetically radiating devices. Verify correct operation of the device if the distance is shorter.

The Nerivio device complies with immunity tests described below.

15.1. ELECTROMAGNETIC TEST RESULT SUMMARY

Test	Standard	Class/ Severity level	Test result
Documentation (IEC /EN 60601-1-2 sections 4 and 5 & IEC /EN 60601-2-10 section 201.7.9)			
General requirements for EMC	section 4.1	--	Complies
External labels	section 5.1	--	Complies
Conformity of Users' Manual	section 5.2.1	--	Complies
Accuracy of Technical Descr.	section 5.2.2	--	Complies
Emission			
Radiated emission Frequency range: 30-1000 MHz	IEC 60601-1-2 section 7.1/ CISPR 11 & IEC 60601-2-10 section 202/ EN 60601-1-2 section 7.1 / EN 55011 & EN 60601-2-10 section 202	Group 1 Class B	Complies
	ETSI EN 301 489-1 section 8.2; ETSI EN 301 489-17 section 7.1 / EN 55032	Class B	Complies
Radiated emission Frequency range: 1.0 GHz – 6.0 GHz	ETSI EN 301 489-1 section 8.2; ETSI EN 301 489-17 section 7.1 EN 55032	Class B	Complies
Immunity			
Immunity from Electrostatic discharge (ESD)	IEC / EN 60601-1-2 section 8.9, Table 4 / IEC 61000-4-2 IEC / EN60601-2-10 section 202	8 kV contact & 15 kV air discharges	Complies
	ETSI EN 301 489-1 section 9.3; ETSI EN 301 489-17 section 7.2 / EN 61000-4-2	4 kV contact & 8 kV air discharges	Complies
Immunity from radiated electromagnetic fields	IEC / EN 60601-1-2 section 8.9, Table 4 / IEC 61000-4-3; IEC / EN 60601-2-10 section 202	10 V/m, 80 MHz ÷ 2.7 GHz, 80% AM, 1 kHz	Complies
Immunity from Proximity field from wireless communications equipment	IEC / EN 60601-1-2 section 8.10, Table 9 / IEC 61000-4-3; IEC / EN 60601-2-10 section 202	List of frequencies, from 9 V/m up to 28 V/m, PM (18 Hz or 217 Hz), FM 1 kHz	Complies
Immunity from radiated electromagnetic fields	ETSI EN 301 489-1 section 9.2; ETSI EN 301 489-17 section 7.2 / EN 61000-4-3	3 V/m, 80 MHz - 6 GHz, AM 80% @ 1 kHz	Complies
Immunity from power frequency magnetic field	IEC / EN 60601-1-2 section 8.9, Table 4/ IEC 61000-4-8; IEC / EN 60601-2-10 section 202	30 A/m @ 50 Hz & 60 Hz	Complies
Immunity from proximity frequency magnetic field	IEC 60601-1-2 (2020) / IEC 60101-1-2 (2015/A1:2021) / Section 8.11 (IEC/EN 61000-4-39)	8 A/m @; 30 kHz, CW; 65 A/m @ 134.2 kHz; PM 2.1kHz 50%; 7.5 A/m @ 13.56 MHz; PM 50kHz 50%	Complies

15.2. ELECTROMAGNETIC EMISSIONS

The Nerivio is intended for use in the electromagnetic environment specified below. Please ensure that the device is used according to these specifications.

Note: the following tables are formatted based on IEC60601-1-2.

Specified Standard	Freq. range	Polariz.	Ref. Table / Plot	Result	Remarks
IEC 60601-1-2 / CISPR 11 Group 1 Class B; EN 60601-1-2 / EN 55011 Group 1 Class B; ETSI EN 301 489-1 / EN 55032 Class B	30 MHz – 1 GHz	V/H	Table 3	PASS	All received emission were found at least 9.7 dB below limits
ETSI EN 301 489-1 / EN 55032 Class B	1.0 GHz – 6.0 GHz	V/H	Plot #1	PASS	All received emission were found at least 10 dB below limits

15.3. ELECTROMAGNETIC IMMUNITY

The Nerivio is intended for use in the electromagnetic environment specified below. Please ensure that the device is used according to these specifications.

Frequency range, MHz	EUT configuration with respect to antenna	Severity level, V/m rms unmodulated	Modulation	EUT performance during test	Performance criteria	Result
Per IEC / EN 60601-1-2 / IEC / EN 60601-2-10						
80-2700 (sweep)	Vertical / Horizontal	10.0	80 % AM, 1 kHz sinwave	A	A	PASS
Proximity field from wireless communications equipment						
385	Vertical / Horizontal	27.0	PM, 18 Hz	A	A	PASS
450	Vertical / Horizontal	28.0	FM, ± 5 kHz deviation, 1 kHz sinwave	A	A	PASS
710 745 780	Vertical / Horizontal	9.0	PM, 217 Hz	A	A	PASS
810 870 930	Vertical / Horizontal	28.0	PM, 18 Hz	A	A	PASS
1720 1845 1970	Vertical / Horizontal	28.0	PM, 217 Hz	A	A	PASS
2450	Vertical / Horizontal	28.0	PM, 217 Hz	A	A	PASS
5240 5500 5785	Vertical / Horizontal	9.0	PM, 217 Hz	A	A	PASS
Per ETSI EN 301 489-1 / -17						
80-6000 (sweep)	Vertical / Horizontal	3.0	80 % AM, 1 kHz sinwave	A	A	PASS

15.4. RECOMMENDED SEPARATION DISTANCES

Recommended separation distance between portable and mobile RF communications equipment and the NM				
Nervio is intended for use in an electromagnetic environment in which radiated RF disturbances are controlled. The customers or the users of Nervio can help prevent electromagnetic interference by maintaining a minimum distance between portable and mobile RF communications equipment (transmitters) and Nervio as recommended below, according to the maximum output power of the communications equipment.				
Output Power of Transmitter in Watt	Separation distance according to frequency of transmitter in meter			
	150 kHz to 80 MHz		80 MHz to 800 MHz	800 MHz to 2.7 GHz
	$d = 1.16 \sqrt{P}$	$d = 0.58 \sqrt{P}$	$d = 0.35 \sqrt{P}$	$d = 0.7 \sqrt{P}$
0.01	0.12	0.06	0.04	0.07
0.1	0.37	0.18	0.11	0.22
1	1.16	0.58	0.35	0.7
10	3.67	1.8	1.1	2.2
100	11.6	5.8	3.5	7.0
For transmitters rated at a maximum output power not listed above, the recommended separation distance d in meters (m) can be estimated using the equation applicable to the frequency of the transmitter, where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer.				
Note: At 80 MHz and 800 MHz, the separation distance for the higher frequency range applies				
Note: These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects, and people.				

16. FCC RADIO FREQUENCY INTERFERENCE STATEMENT

FCC Registration Number (FRN): 0027054477.

This equipment has been tested and found to comply with the limits of Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a installation. If this equipment causes interference with other devices, which may be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the device receiving the interference
- Increase the separation between the equipment
- Connect the equipment into an outlet on a circuit different from that to which the device is connected.
- Consult the manufacturer or field service technician for help

Theranica Bio-Electronics LTD. is not responsible for any radio or communication interference caused by using other than specified or recommended cables and battery or by unauthorized changes or modifications to this equipment. Changes or modifications not

expressly approved by the manufacturer could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

17. APPLICABLE STANDARDS

- EN 60601-1:2006/A2:2021 / IEC 60601-1 edition 3.2 b:2020 Medical electrical equipment, part 1: General requirements for basic safety and essential performance.
- EN 60601-1-2:2015/A1:2021 / IEC 60601-1-2 edition 4.1 a:2020 Medical electrical equipment- Part 1-2: General requirements for safety – collateral standard: Electromagnetic compatibility –Requirements and tests.
- EN 60601-2-10:2015/A1:2016/A2:2023 / IEC 60601-2-10 edition 2.2 b:2023 Requirements for the safety of nerve and muscle stimulators
- ETSI EN 301 489-1 V2.2.3:2019 ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements Harmonized Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU
- ETSI EN 301 489-17 V3.3.1:2024 ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility
- ETSI EN 301 489-3 V2.3.2 (2023) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU.

Nerivio®



theranica

Theranica Bio-Electronics LTD.
9 Granit St., North Industrial Park,
Caesarea, 3079893, Israel
Tel: +972-72-3909-763, Fax: +972-72-3909762

www.theranica.com

© 2018 Theranica Bio-Electronics LTD. All Rights Reserved.
ART No. LBL-NM-0014-00, Rev. 10.0, August 2026