



Dahua AirShield + Permaconn SIMs

Activate Permaconn's SecureLink SIMs to connect Dahua AirShield to a monitoring center using Atlas. These SIMs are pre-configured and connect ready:

- No additional receivers required - all alarm traffic is delivered through the Permaconn receiver
- Supports all alarm and video events
- Connectivity using Permaconn's ISO27001 cyber-certified signalling network backed by 99.99% uptime
- Easy to manage using Atlas and Permaconn serial number.
- Single or Dual SIM poll plan - P2 or P9
- AirShield hubs now come with SecureLink SIMs from Permaconn.


Before you start, check you have the following:

1. Ensure you are logged into Atlas.
2. The Serial Number of the SecureLink SIMs

Installation and Configuration Steps

1 Log into Atlas and click on Fleet tab.


- Click on the Activate button and below will appear
- Enter the SecureLink SIM Serial Number and click Activate

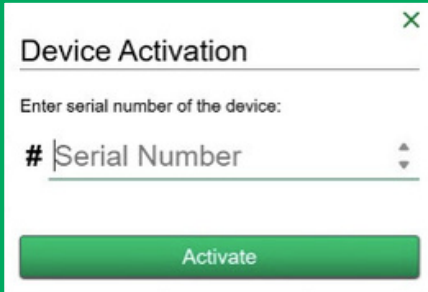

A dialog box titled "Device Activation" with a close button (X) in the top right corner. It contains a label "Enter serial number of the device:" followed by a text input field with a placeholder "# Serial Number" and a dropdown arrow. Below the input field is a green "Activate" button.

2 "PM S2 Activation Screen" window will now be displayed, following fields must be populated:

- "Enable Fix Account" = Enable
- "Interface Type" = Dahua SIA Interface
- Panel MAC should be BLANK
Note: Installer will populate Panel MAC during Installation.
- Click Activate

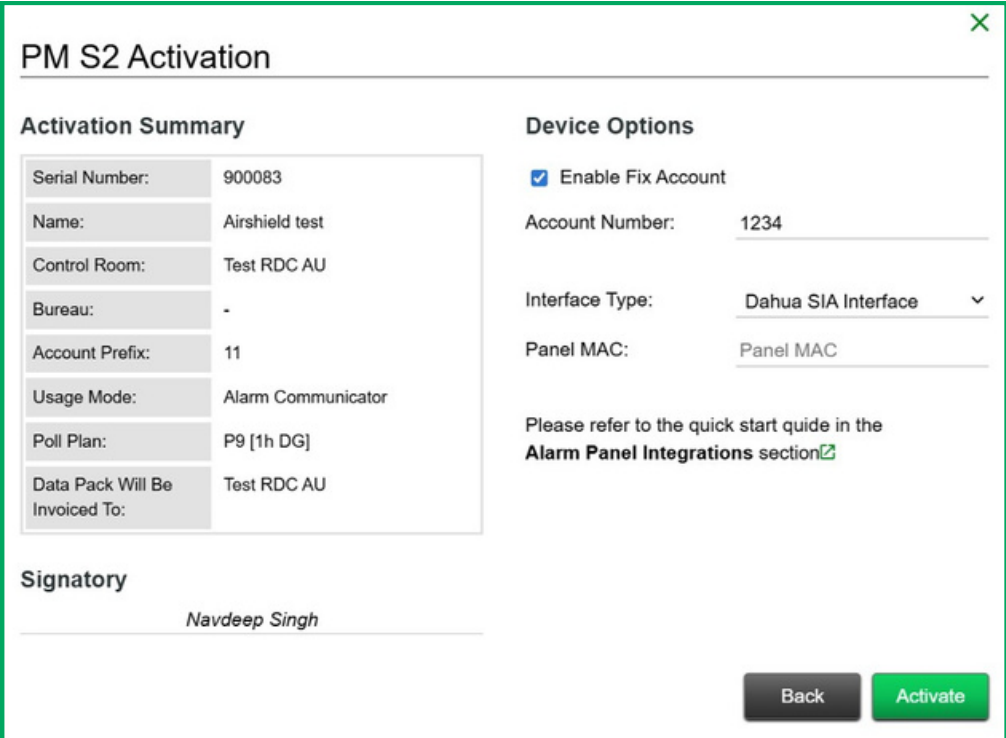

A "PM S2 Activation" window with a close button (X) in the top right corner. It is divided into three main sections: "Activation Summary", "Device Options", and "Signatory".

Activation Summary

Serial Number:	900083
Name:	Airshield test
Control Room:	Test RDC AU
Bureau:	-
Account Prefix:	11
Usage Mode:	Alarm Communicator
Poll Plan:	P9 [1h DG]
Data Pack Will Be Invoiced To:	Test RDC AU

Device Options

☒ Enable Fix Account

Account Number: 1234

Interface Type: Dahua SIA Interface (dropdown arrow)

Panel MAC: Panel MAC

Please refer to the quick start guide in the [Alarm Panel Integrations](#) section.

Signatory

Navdeep Singh

At the bottom right are two buttons: "Back" and "Activate".



If you need any assistance, please contact
Technical Support:
(02) 9352 1777 or **1300 55 66 43**, or via email
support@permaconn.com

Version May 2026.