

NOTE:


ALL activation devices must connect to the Purple & White/Purple wires (N/O dry contact only).
The Purple & White/Purple wires from the OC-904C T's connect in parallel. Be sure to observe polarity (+ to +, - to -).
DO NOT connect purple wires to Door Control.



Activation Devices
Push Plates, Card Readers
Sensors, Etc.

Activation
Input
Relay 3
Delayed
Output
Von Duprin
PS-873
W/ AO Board
Relay 1 & 2
Outputs

**Electric
Panic
Device**

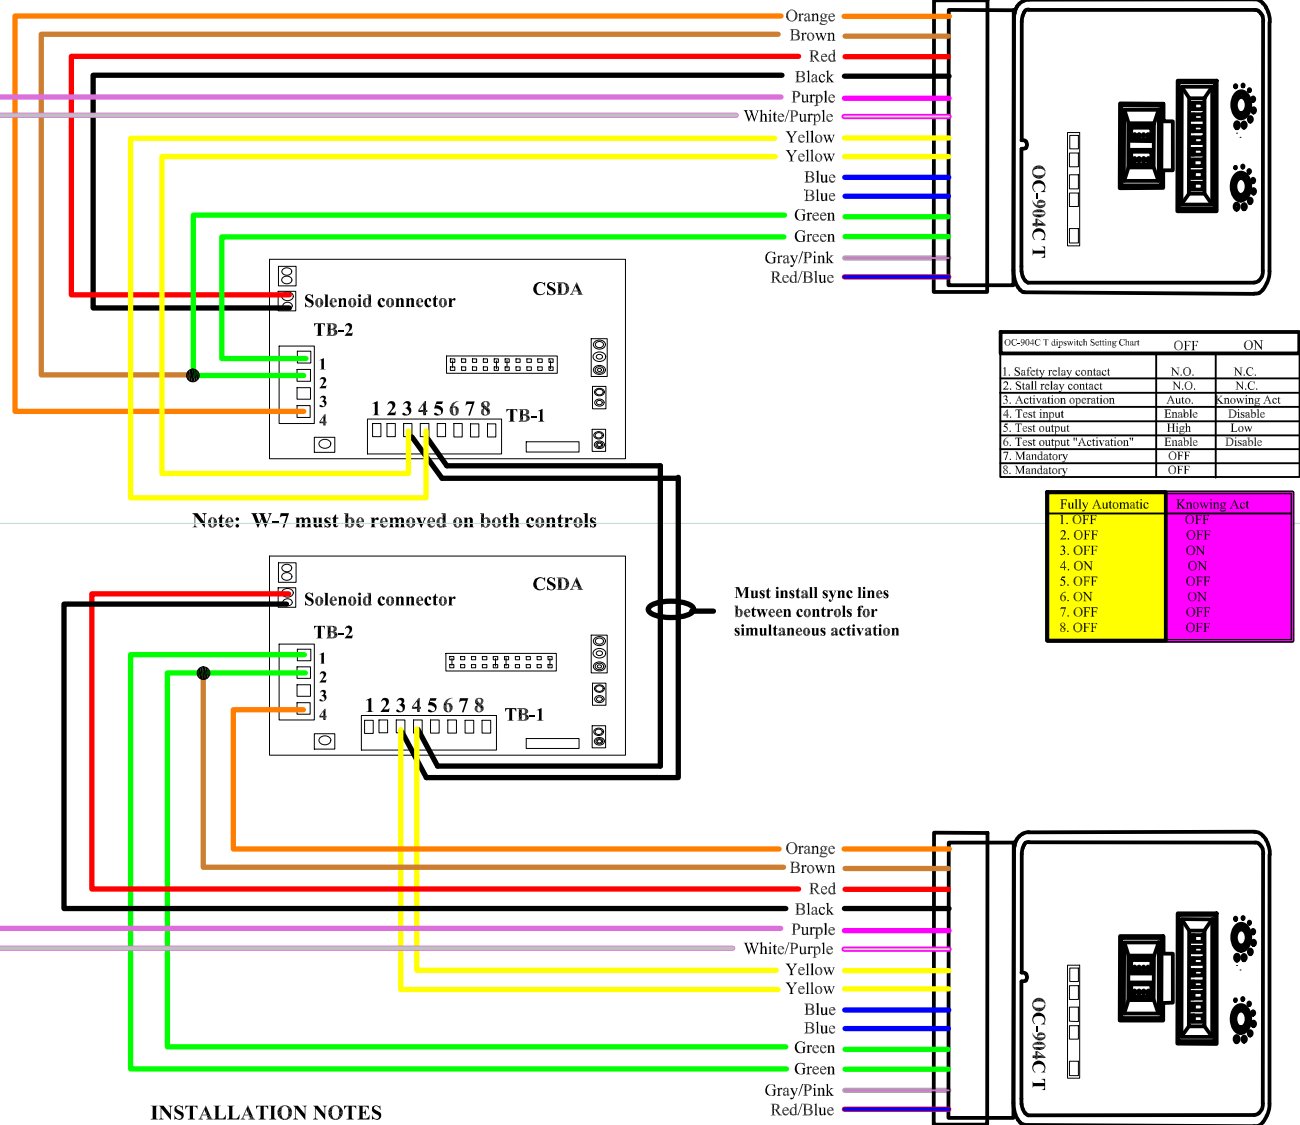

OC-904C T dipswitch Setting Chart			OFF	ON
1. Safety relay contact	N.O.	N.C.		
2. Stall relay contact	N.O.	N.C.		
3. Activation operation	Auto.	Knowing Act		
4. Test input	Enable	Disable		
5. Test output	High	Low		
6. Test output "Activation"	Enable	Disable		
7. Mandatory	Off			
8. Mandatory	Off			

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

NOTE: This configuration will supply simultaneous activation and independent safety and stall.
For simultaneous safety and stall contact Optex technical support for more information.

INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.

Title: 16300530 Besam Powerswing Simultaneous Pair with Elite T and Electric Lock		Drawing # 16300530
Drawing By: pwk	Date: 09/16/17	Sheet: 1 of 1
OPTEx Technologies Inc. 18730 S. Wilmington Ave. Unit 100 Rancho Dominguez, CA. 90220 800-877-6656 FAX 310-898-1098		