

## Technical Summary

### Part 1 : Dimensions

<b>Width</b>	190	mm
<b>Length</b>	2265	mm
<b>Total Thickness</b>	12.3	mm
<b>Boards Per Box</b>	5	planks
<b>Box Size</b>	2.1744	sqm

### Part 2 : General Data

<b>Click Lock System</b>	Unilin on Long Ends & 5G Valinge on Short Ends
<b>Core Type</b>	Pure Pine Timber Core
<b>Wear Resistance</b>	AC4, Wear Class EN32
<b>Finish</b>	HD Embossed in Register (Oak Designs) Matte (Australian Timber Designs)
<b>Installation Method</b>	Floating Installation
<b>Fade Resistant</b>	Yes
<b>Slip Resistance (Wet)</b>	P2 (Reported SRV 33)
<b>Slip Resistance (Dry)</b>	D1 (0.59)
<b>Box Weight</b>	23.5kg
<b>Profile</b>	Micro Bevel
<b>Pattern Repeat</b>	2.4sqm Unique Designs

## Part 3 : Warranty

<b>General Residential</b>	25	Years
<b>Light Commercial</b>	5	Years

## Part 4 : Wet Slip Test Certificate

**Sample Description** Luxflor Hugo Laminate Flooring (EVERFLOOR)

**Date Tested** June 2018 (Tested through FORAY Laboratories – NATA Accreditation 1231)

**Test Method** : AS/NZS 4586-2013 Appendix A “Slip resistance classification of new pedestrian surface materials – Wet Pendulum Test Method” using a slider 96.

**Test Data:**

Sample Identification	Wet floor friction result <sup>1</sup>	Classification <sup>2</sup> (Standards Australia AS 4586-2013)
Luxflor Hugo Laminate Flooring (EVERFLOOR)	33	P2

<sup>1</sup> Five test average value

<sup>2</sup> The classifications indicate that the contribution of the floor surfaces to the risk of slipping when wet is moderate



Dr. Vyt Garnys  
 PhD, BSc(Hons) AIMM, ARACI, ISIAQ  
 ACA, AIRAH, FMA  
 Managing Director and Principal Consultant



Travis Hale  
 BSc (Biotech)  
 Senior Consultant



Dr. Tuan Duong  
 PhD, B. Eng. (Chemical)  
 Senior Consultant

**V2104060**

CETEC Pty Ltd ABN: 44 006 873 687 [cetec.com.au](http://cetec.com.au) | CETEC Foray Ltd Company No.:10251530  
 Melbourne | Sydney | Brisbane | Perth | London

## Part 5 : Dry Slip Test Certificate

**Test Method** : AS/NZS 4586-2013 Appendix B "Slip resistance classification of new pedestrian surface materials – Dry Floor Friction Test Method".

**Test Data:**

<b>Sample Identification</b>	<b>Dry floor friction result <sup>1</sup></b>	<b>Classification <sup>2</sup> (AS 4586-2013 Australian Standards)</b>
Luxflor Hugo Laminate Flooring (EVERFLOOR)	0.59	D1

<sup>1</sup> Five test average value

<sup>2</sup> The classifications indicate that the contribution of the floor surfaces to the risk of slipping when dry is low.



Dr. Vyt Garnys  
 PhD, BSc(Hons) AIMM, ARACI, ISIAQ  
 ACA, AIRAH, FMA  
 Managing Director and Principal Consultant



Travis Hale  
 BSc (Biotech)  
 Senior Consultant



Dr. Tuan Duong  
 PhD, B. Eng. (Chemical)  
 Senior Consultant

**V2104060**

CETEC Pty Ltd ABN: 44 006 873 687 [cetec.com.au](http://cetec.com.au) | CETEC Foray Ltd Company No.:10251530  
 Melbourne | Sydney | Brisbane | Perth | London

## Part 6 : Fire & Smoke Test Certificate

**Test Method** : AS/ISO 9239-1:2003 Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source.

### Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 18-12-2023

Date Tested 16-01-2024

CHF Value	1	2	3	Mean	
Length	6.7	6.7	6.6	6.7	kW/m <sup>2</sup>
Width	6.9	-	-	-	kW/m <sup>2</sup>
HF-30 Value	1	2	3	Mean	
Length	7.2	6.7	6.6	6.8	kW/m <sup>2</sup>
Width	7.6	-	-	-	kW/m <sup>2</sup>
Smoke Value	1	2	3	Mean	
Length	33	90	30	51	%.min
Width	6	-	-	-	%.min

V2104060

CETEC Pty Ltd ABN: 44 006 873 687 [cetec.com.au](http://cetec.com.au) | CETEC Foray Ltd Company No.:10251530  
Melbourne | Sydney | Brisbane | Perth | London

## Part 7 : VOC Test

### TEST REPORT

**Client :** Everfloor  
2A 87 Allingham Street  
Condell Park NSW 2200

**Test Number :** 23-004869  
**Issue Date :** 9/01/2024  
**Print Date :** 25/01/2024

---

**Sample Description**      Clients Ref : "HugoPro Laminate"  
Laminate flooring  
End Use : Flooring  
Nominal Composition : Pine timber  
Nominal Mass per Unit Area/Density : 860kg/m3  
Nominal Thickness : 12.3mm

---

**ASNZS 2098.11-2005**

**Formaldehyde Release**

Test Result: 0.52 mg/L

Test pieces: 20 pieces were prepared  
Conditions: 20+/-2degC and 65+/-5% Relative Humidity for 7 days

Tested at AWTA JSIC JinAo Testing Co Ltd  
Date Tested: 27/12/2023  
Test No: JA236964

314021

68048

Page 1 of 1

© Australian Wool testing Authority Ltd  
Copyright - All Rights Reserved

Samples, and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. The above test results are designed to provide THE CLIENT WITH GUIDANCE INFORMATION ONLY.

This document shall not be reproduced except in full and shall be rendered void if amended or altered.

This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved in advance by the Managing Director of AWTA Ltd.



Fiona McDonald  
APPROVED SIGNATORY



MICHAEL A. JACKSON B.Sc.(Hons)  
MANAGING DIRECTOR

0205/11/06

# Part 8: Acoustic Test (12mm Laminate + 2MM EVERQUIET IXPE)

System Tested	L <sub>nT,w</sub> <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + 2mm Everquiet IXPE Underlay	42	65	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -

Description of Floor System	Thickness (mm)	Density (g)
12 mm laminate flooring	12	--
2 mm EverQuiet IXPE underlay	2	--
Concrete slab	180-200	--
Suspended ceiling	80-150	--


Room Dimensions	Width (m)	Length (m)	Area (m <sup>2</sup> )
Receiver Rm	5	8	40.00

Sample Dimensions	Width (m)	Length (m)	Area (m <sup>2</sup> )
Sample	1	1	1

Receiver Rm	Location	Width	Length	Area	Height	Volume	Room Surfaces
Receiver Rm	en/Dining/Living directly t	5	8	40.00	2.7	108.00	Walls: Plasterboard, Floor: Timber, Ceiling: Plasterboard


Frequency f Hz	L <sub>nT</sub> (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	50.2
63	45.4	N/A	53.4
80	50.4	N/A	49.4
100	50.9	N/A	48.2
125	53.9	N/A	54.7
160	55.3	N/A	52.4
200	46.7	N/A	45.7
250	45.5	N/A	45.8
315	45.7	N/A	44.7
400	46.6	N/A	44.1
500	43.4	N/A	40.7
630	41.9	N/A	37.6
800	43.3	N/A	33.4
1000	44.3	N/A	27.2
1250	44.2	N/A	21.2
1600	45.6	N/A	15.0
2000	47.9	N/A	11.5
2500	49.9	N/A	9.1
3150	50.7	N/A	5.7
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

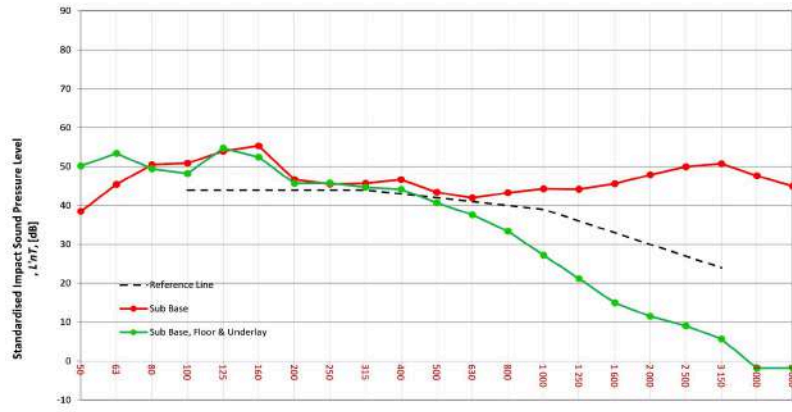

Sub Base	
L <sub>nT,w</sub>	55 AS ISO 717.2 - 2004
CI	-9 AS ISO 717.2 - 2004
CI(50-2500)	-9 AS ISO 717.2 - 2004
CI(63-2000)	-9 AS ISO 717.2 - 2004
AAAC★	3 Star AAAC Guideline
FIIC	49 ASTM E1007-14

Sub Base & Floor	
L <sub>nT,w</sub>	N/A AS ISO 717.2 - 2004
CI	N/A AS ISO 717.2 - 2004
CI(50-2500)	N/A AS ISO 717.2 - 2004
CI(63-2000)	N/A AS ISO 717.2 - 2004
AAAC★	N/A AAAC Guideline
FIIC	N/A ASTM E1007-14

Sub Base, Floor & Underlay	
L <sub>nT,w</sub>	42 AS ISO 717.2 - 2004
CI	1 AS ISO 717.2 - 2004
CI(50-2500)	3 AS ISO 717.2 - 2004
CI(63-2000)	3 AS ISO 717.2 - 2004
AAAC★	5 Star AAAC Guideline
FIIC	65 ASTM E1007-14

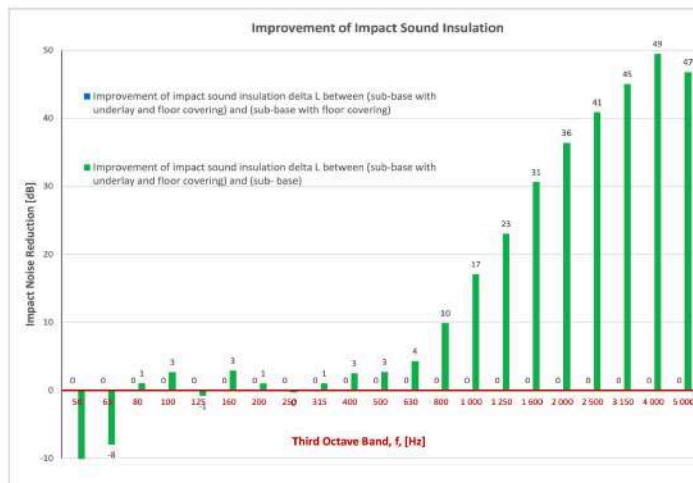

### Definitions of Noise Metrics

**FIIC:** Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L<sub>nT,w</sub>:** The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:** Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

**CI(50-2500):** Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):** Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L <sub>nT,w</sub>	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA G2	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + 3MM EVERQUIET IXPE)

System Tested	L <sub>nTw</sub> <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + 3mm Everquiet IXPE Underlay	42	65	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -

Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	--
3 mm EverQuiet IXPE underlay		3	--
Concrete slab		180-200	--
Suspended ceiling		80-150	--


Room Width: 5 m  
 Floor Length: 8 m  
 Dimensions Area: 40.00 m<sup>2</sup>

Sample Width: 1 m  
 Length: 1 m  
 Area: 1 m<sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly i	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L <sub>nT</sub> (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	46.2
63	45.4	N/A	45.2
80	50.4	N/A	49.0
100	50.9	N/A	50.0
125	53.9	N/A	54.2
160	55.3	N/A	52.9
200	46.7	N/A	47.4
250	45.5	N/A	44.1
315	45.7	N/A	44.9
400	46.6	N/A	41.8
500	43.4	N/A	40.5
630	41.9	N/A	36.4
800	43.3	N/A	36.8
1000	44.3	N/A	34.2
1250	44.2	N/A	24.5
1600	45.6	N/A	22.1
2000	47.9	N/A	16.6
2500	49.9	N/A	16.5
3150	50.7	N/A	11.7
4000	47.6	N/A	5.6
5000	44.9	N/A	-1.8

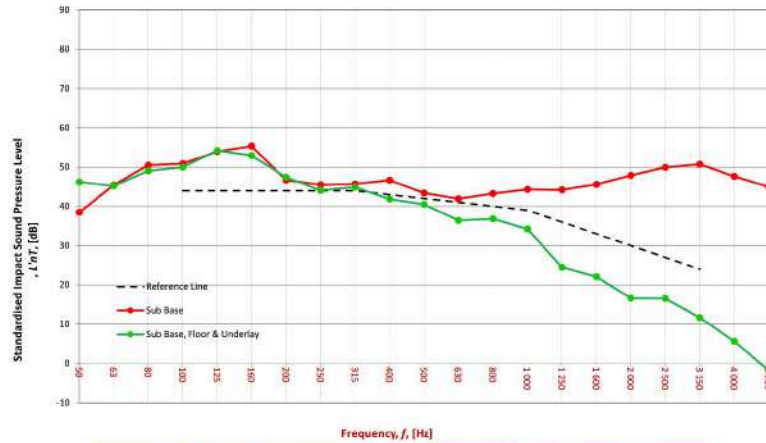

Sub Base		
L <sub>nT,w</sub>	55	AS ISO 717.2 - 2004
CI	-9	AS ISO 717.2 - 2004
CI(50-2500)	-9	AS ISO 717.2 - 2004
CI(63-2000)	-9	AS ISO 717.2 - 2004
AAAC	3 Star	AAAC Guideline
FIIC	49	ASTM E1007-14

Sub Base & Floor		
L <sub>nT,w</sub>	N/A	AS ISO 717.2 - 2004
CI	N/A	AS ISO 717.2 - 2004
CI(50-2500)	N/A	AS ISO 717.2 - 2004
CI(63-2000)	N/A	AS ISO 717.2 - 2004
AAAC	N/A	AAAC Guideline
FIIC	N/A	ASTM E1007-14

Sub Base, Floor & Underlay		
L <sub>nT,w</sub>	42	AS ISO 717.2 - 2004
CI	2	AS ISO 717.2 - 2004
CI(50-2500)	2	AS ISO 717.2 - 2004
CI(63-2000)	2	AS ISO 717.2 - 2004
AAAC	5 Star	AAAC Guideline
FIIC	65	ASTM E1007-14

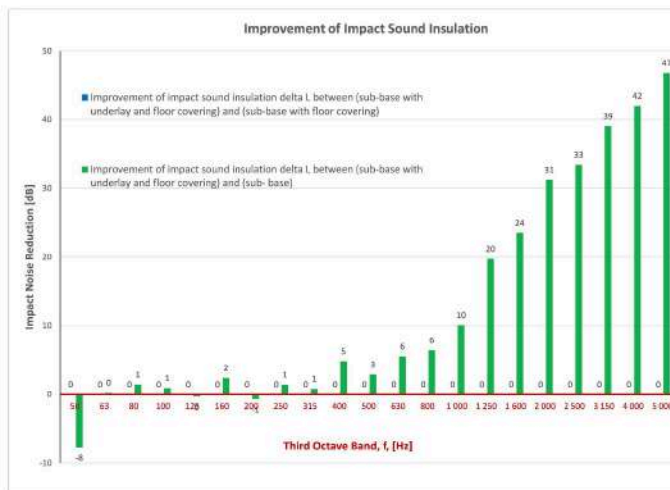

### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L<sub>nT,w</sub>:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 - 2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125 - 2000 Hz.

AAAC Star R.	2	3	4	5	6
L <sub>nT,w</sub>	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + EQ312 RUBBER UNDERLAY)

System Tested	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + EQ312 Rubber Underlay	44	62	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Thickness (mm)	Density (S)
12 mm laminate flooring	12	-
3 mm EverQuiet Rubber EQ312 underlay	3	-
Concrete slab	180-200	-
Suspended ceiling	80-150	-

Room Dimensions	Width (m)	Length (m)	Area (m <sup>2</sup> )
Room	5	8	40.00
Floor	5	8	40.00
Dimensions	5	8	40.00

Sample Dimensions	Width (m)	Length (m)	Area (m <sup>2</sup> )
Sample	1	1	1
Dimensions	1	1	1
Area	1	1	1

Receiver Rm	Location	Width	Length	Area	Height	Volume	Room Surfaces		
							Walls	Floor	Ceiling
Reception/Dining/Living directly i		5	8	40.00	2.7	108.00	Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Underlay
50	38.5	N/A	48.4
63	45.4	N/A	49.1
80	50.4	N/A	49.0
100	50.9	N/A	48.8
125	53.9	N/A	56.2
160	55.3	N/A	57.7
200	46.7	N/A	48.2
250	45.5	N/A	46.4
315	45.7	N/A	45.4
400	46.6	N/A	45.0
500	43.4	N/A	44.4
630	41.9	N/A	36.4
800	43.3	N/A	32.3
1000	44.3	N/A	30.1
1250	44.2	N/A	23.7
1600	45.6	N/A	16.1
2000	47.9	N/A	12.3
2500	49.9	N/A	11.7
3150	50.7	N/A	3.9
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

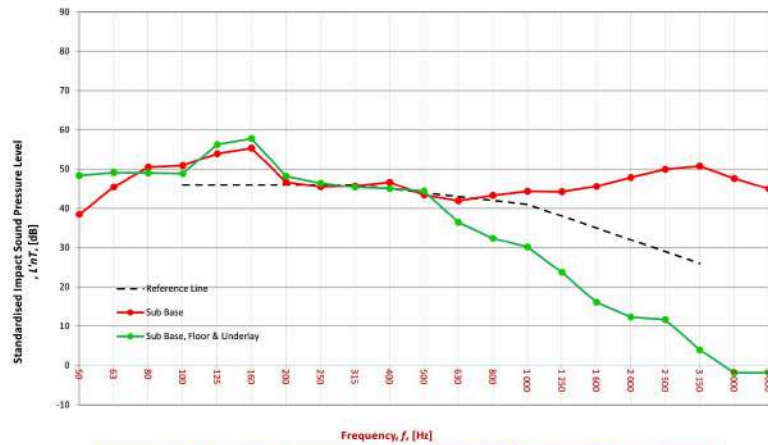

Sub Base	
$L'_{nT,w}$	55
CI	-9
CI(50-2500)	-9
CI(63-2000)	-9
AAAC	3 Star
FIIC	49

Sub Base & Floor	
$L'_{nT,w}$	N/A
CI	N/A
CI(50-2500)	N/A
CI(63-2000)	N/A
AAAC	N/A
FIIC	N/A

Sub Base, Floor & Underlay	
$L'_{nT,w}$	44
CI	2
CI(50-2500)	3
CI(63-2000)	3
AAAC	5 Star
FIIC	62

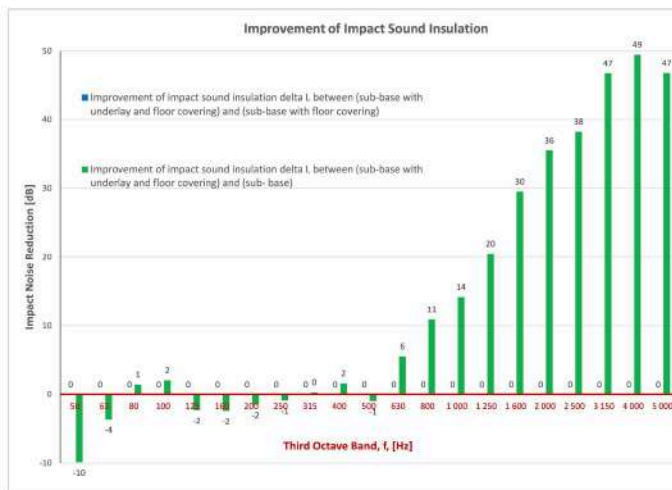

### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**$L'_{nT,w}$ :**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125-2000 Hz.

AAAC Star R.	2	3	4	5	6
$L'_{nT,w}$	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + EQ512 Rubber Underlay)

System Tested	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + EQ512 Rubber Underlay	44	62	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	-
5 mm EverQuiet Rubber EQ512 underlay		5	-
Concrete slab		180-200	-
Suspended ceiling		80-150	-

Room Dimensions	Width	Length	Area
Room	5 m	8 m	40.00 m <sup>2</sup>
Sample Dimensions	Width	Length	Area
Sample	1 m	1 m	1 m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	45.3
63	45.4	N/A	49.2
80	50.4	N/A	46.2
100	50.9	N/A	47.7
125	53.9	N/A	56.0
160	55.3	N/A	57.3
200	46.7	N/A	47.6
250	45.5	N/A	45.9
315	45.7	N/A	46.6
400	46.6	N/A	46.1
500	43.4	N/A	41.6
630	41.9	N/A	32.1
800	43.3	N/A	30.9
1000	44.3	N/A	26.2
1250	44.2	N/A	15.0
1600	45.6	N/A	10.4
2000	47.9	N/A	6.7
2500	49.9	N/A	4.5
3150	50.7	N/A	2.9
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

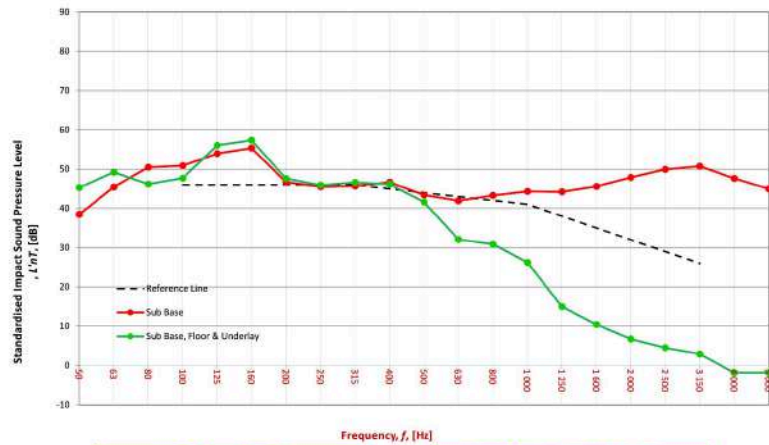

Sub Base		
L'nT,w	55	AS ISO 717.2 - 2004
CI	-9	AS ISO 717.2 - 2004
CI(50-2500)	-9	AS ISO 717.2 - 2004
CI(63-2000)	-9	AS ISO 717.2 - 2004
AAAC	3 Star	AAAC Guideline
FIIC	49	ASTM E1007-14

Sub Base & Floor		
L'nT,w	N/A	AS ISO 717.2 - 2004
CI	N/A	AS ISO 717.2 - 2004
CI(50-2500)	N/A	AS ISO 717.2 - 2004
CI(63-2000)	N/A	AS ISO 717.2 - 2004
AAAC	N/A	AAAC Guideline
FIIC	N/A	ASTM E1007-14

Sub Base, Floor & Underlay		
L'nT,w	44	AS ISO 717.2 - 2004
CI	2	AS ISO 717.2 - 2004
CI(50-2500)	2	AS ISO 717.2 - 2004
CI(63-2000)	2	AS ISO 717.2 - 2004
AAAC	5 Star	AAAC Guideline
FIIC	62	ASTM E1007-14

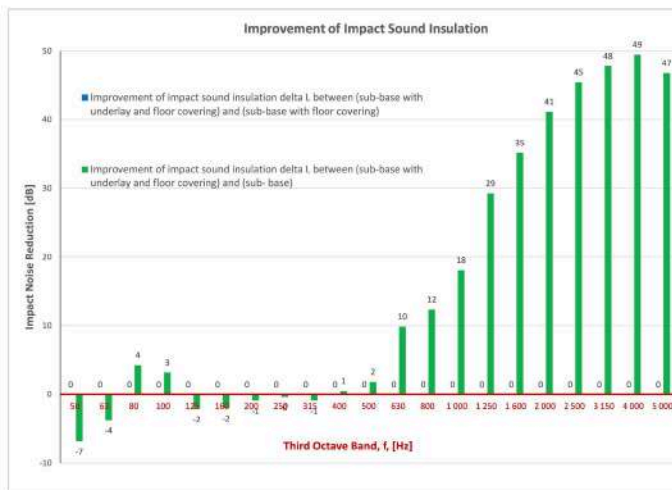

### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + EQ515 Rubber Underlay)

System Tested	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + EQ515 Rubber Underlay	43	63	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Thickness (mm)	Density (S)
12 mm laminate flooring	12	--
5 mm EverQuiet Rubber EQ515 underlay	5	--
Concrete slab	180-200	--
Suspended ceiling	80-150	--

Room Dimensions	Width	Length	Area
Room	5 m	8 m	40.00 m <sup>2</sup>
Floor	5 m	8 m	40.00 m <sup>2</sup>
Sample Dimensions	1 m	1 m	1 m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly i	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	44.6
63	45.4	N/A	52.0
80	50.4	N/A	48.2
100	50.9	N/A	50.1
125	53.9	N/A	56.6
160	55.3	N/A	56.6
200	46.7	N/A	45.9
250	45.5	N/A	44.5
315	45.7	N/A	46.7
400	46.6	N/A	44.0
500	43.4	N/A	41.8
630	41.9	N/A	35.6
800	43.3	N/A	34.4
1000	44.3	N/A	31.3
1250	44.2	N/A	26.1
1600	45.6	N/A	21.4
2000	47.9	N/A	15.6
2500	49.9	N/A	15.9
3150	50.7	N/A	12.7
4000	47.6	N/A	3.6
5000	44.9	N/A	-1.8

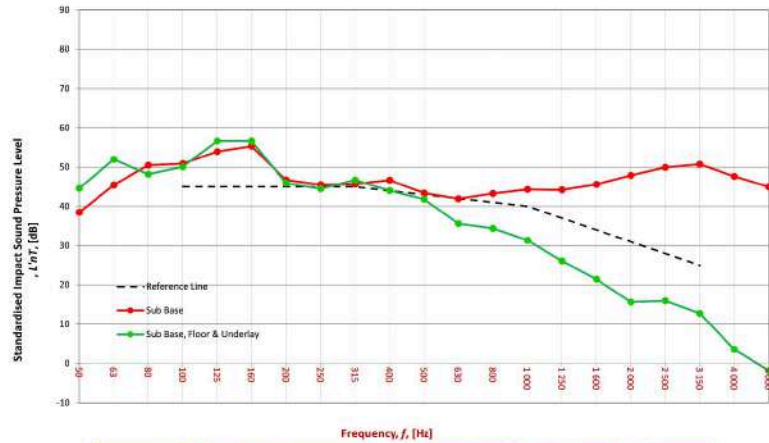

Sub Base	
L'nT,w	55
CI	-9
CI(50-2500)	-9
CI(63-2000)	-9
AAAC	3 Star
FIIC	49

Sub Base & Floor	
L'nT,w	N/A
CI	N/A
CI(50-2500)	N/A
CI(63-2000)	N/A
AAAC	N/A
FIIC	N/A

Sub Base, Floor & Underlay	
L'nT,w	43
CI	4
CI(50-2500)	4
CI(63-2000)	3
AAAC	5 Star
FIIC	63

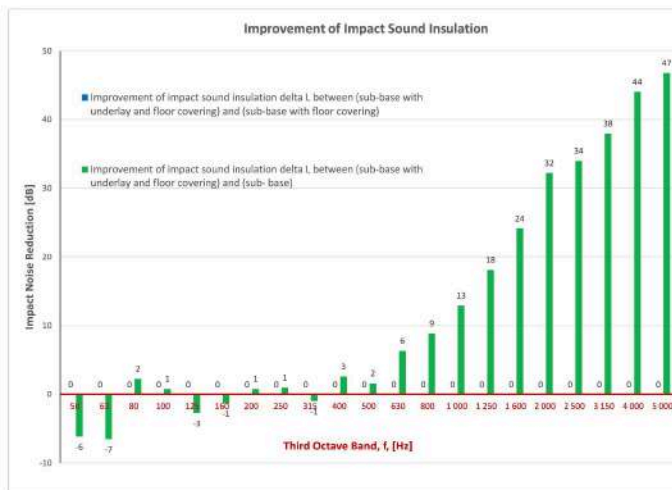

### Definitions of Noise Metrics

**FIIC:** Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:** The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:** Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

**CI(50-2500):** Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):** Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + EQ1012 Rubber Underlay)

<b>System Tested</b>	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
<b>Bare Concrete Floor (ECFS only) - for comparison purposes only</b>	55	49	3
<b>12mm Laminate Flooring + EQ1012 Rubber Underlay</b>	44	62	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	-
10 mm EverQuiet Rubber EQ1012 underlay		10	-
Concrete slab		180-200	-
Suspended ceiling		80-150	-

<b>Room Dimensions</b>	Width:	5	m
	Length:	8	m
	Area:	40.00	m <sup>2</sup>
<b>Sample Dimensions</b>	Width:	1	m
	Length:	1	m
	Area:	1	m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
Reception/Dining/Living directly		5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f [Hz]	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	48.2
63	45.4	N/A	48.1
80	50.4	N/A	47.3
100	50.9	N/A	48.3
125	53.9	N/A	56.9
160	55.3	N/A	57.2
200	46.7	N/A	47.5
250	45.5	N/A	47.4
315	45.7	N/A	47.9
400	46.6	N/A	44.6
500	43.4	N/A	38.3
630	41.9	N/A	32.7
800	43.3	N/A	30.2
1000	44.3	N/A	25.6
1250	44.2	N/A	15.0
1600	45.6	N/A	10.4
2000	47.9	N/A	6.7
2500	49.9	N/A	10.9
3150	50.7	N/A	8.4
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

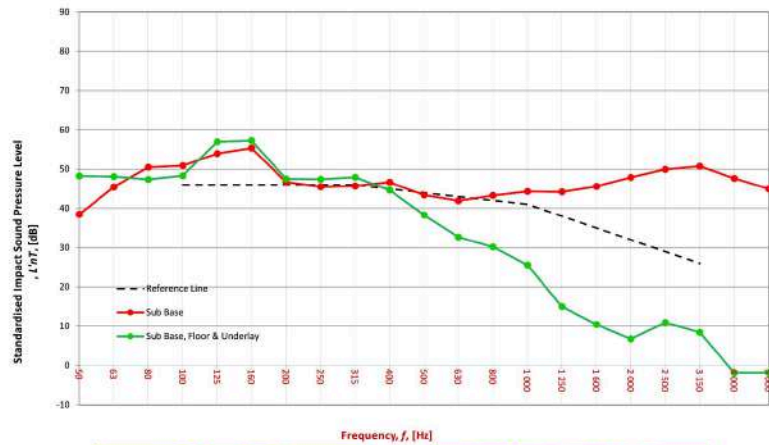

Sub Base		
$L'_{nT,w}$	55	AS ISO 717.2 - 2004
CI	-9	AS ISO 717.2 - 2004
CI(50-2500)	-9	AS ISO 717.2 - 2004
CI(63-2000)	-9	AS ISO 717.2 - 2004
AAAC	3 Star	AAAC Guideline
FIIC	49	ASTM E1007-14

Sub Base & Floor		
$L'_{nT,w}$	N/A	AS ISO 717.2 - 2004
CI	N/A	AS ISO 717.2 - 2004
CI(50-2500)	N/A	AS ISO 717.2 - 2004
CI(63-2000)	N/A	AS ISO 717.2 - 2004
AAAC	N/A	AAAC Guideline
FIIC	N/A	ASTM E1007-14

Sub Base, Floor & Underlay		
$L'_{nT,w}$	44	AS ISO 717.2 - 2004
CI	2	AS ISO 717.2 - 2004
CI(50-2500)	3	AS ISO 717.2 - 2004
CI(63-2000)	3	AS ISO 717.2 - 2004
AAAC	5 Star	AAAC Guideline
FIIC	62	ASTM E1007-14

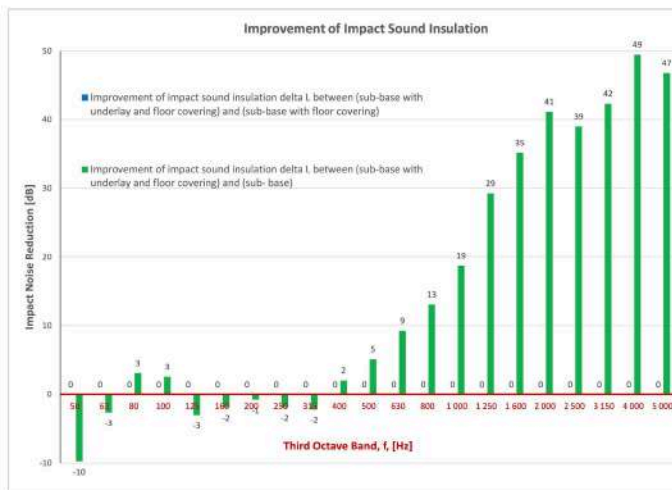

### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
$L'_{nT,w}$	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

# Part 8: Acoustic Test (12mm Laminate + EQW512 Rubber Wavy Underlay)

<b>System Tested</b>	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
<b>Bare Concrete Floor (ECFS only) - for comparison purposes only</b>	55	49	3
<b>12mm Laminate Flooring + EQW512 Rubber Wavy Underlay</b>	42	64	5

## FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	--
5 mm EverQuiet Rubber Wavy EQW512 underlay		5	--
Concrete slab		180-200	--
Suspended ceiling		80-150	--

<b>Room Dimensions</b>	Width:	5	m
	Length:	8	m
	Area:	40.00	m <sup>2</sup>
<b>Sample Dimensions</b>	Width:	1	m
	Length:	1	m
	Area:	1	m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	41.6
63	45.4	N/A	47.8
80	50.4	N/A	44.3
100	50.9	N/A	45.1
125	53.9	N/A	55.8
160	55.3	N/A	54.7
200	46.7	N/A	47.4
250	45.5	N/A	45.7
315	45.7	N/A	44.8
400	46.6	N/A	45.1
500	43.4	N/A	38.8
630	41.9	N/A	29.1
800	43.3	N/A	21.1
1000	44.3	N/A	14.9
1250	44.2	N/A	15.0
1600	45.6	N/A	10.4
2000	47.9	N/A	6.7
2500	49.9	N/A	2.5
3150	50.7	N/A	-0.4
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

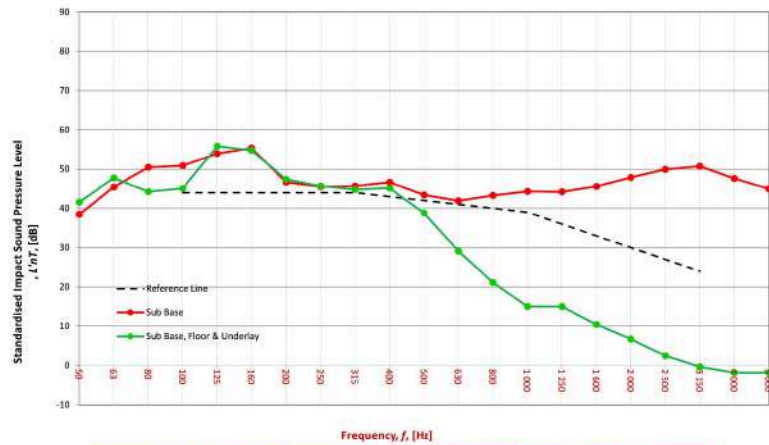

Sub Base	
L'nT,w	55
CI	-9
CI(50-2500)	-9
CI(63-2000)	-9
AAAC★	3 Star
FIIC	49

Sub Base & Floor	
L'nT,w	N/A
CI	N/A
CI(50-2500)	N/A
CI(63-2000)	N/A
AAAC★	N/A
FIIC	N/A

Sub Base, Floor & Underlay	
L'nT,w	42
CI	2
CI(50-2500)	3
CI(63-2000)	3
AAAC★	5 Star
FIIC	64

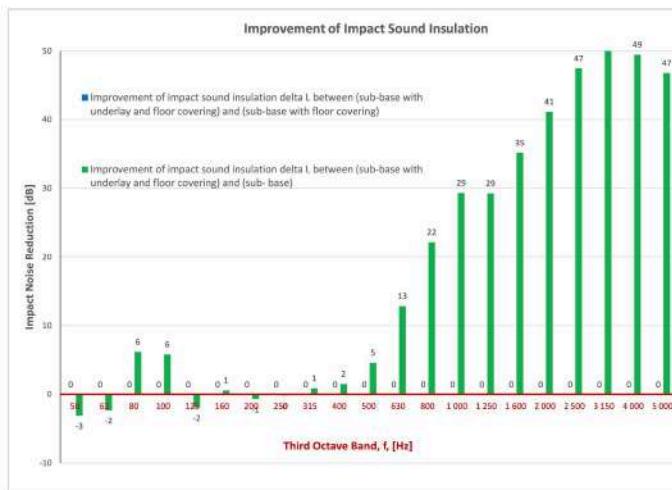

### Definitions of Noise Metrics

**FIIC:** Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:** The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:** Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):** Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):** Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

## Part 8: Acoustic Test (12mm Laminate + EQW1012 Rubber Wavy Underlay)

System Tested	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + EQW1012 Rubber Wavy Underlay	44	63	5

### FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	-
10 mm EverQuiet Rubber Wavy EQW1012 underlay		10	-
Concrete slab		180-200	-
Suspended ceiling		80-150	-

Room Dimensions	Width	Length	Area
Room	5 m	8 m	40.00 m <sup>2</sup>
Floor	5 m	8 m	40.00 m <sup>2</sup>
Sample Dimensions	1 m	1 m	1 m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	33.9
63	45.4	N/A	40.5
80	50.4	N/A	47.0
100	50.9	N/A	49.0
125	53.9	N/A	55.4
160	55.3	N/A	56.8
200	46.7	N/A	47.9
250	45.5	N/A	47.4
315	45.7	N/A	46.4
400	46.6	N/A	41.2
500	43.4	N/A	33.8
630	41.9	N/A	25.1
800	43.3	N/A	12.1
1000	44.3	N/A	14.9
1250	44.2	N/A	15.0
1600	45.6	N/A	10.4
2000	47.9	N/A	6.7
2500	49.9	N/A	2.5
3150	50.7	N/A	-0.4
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

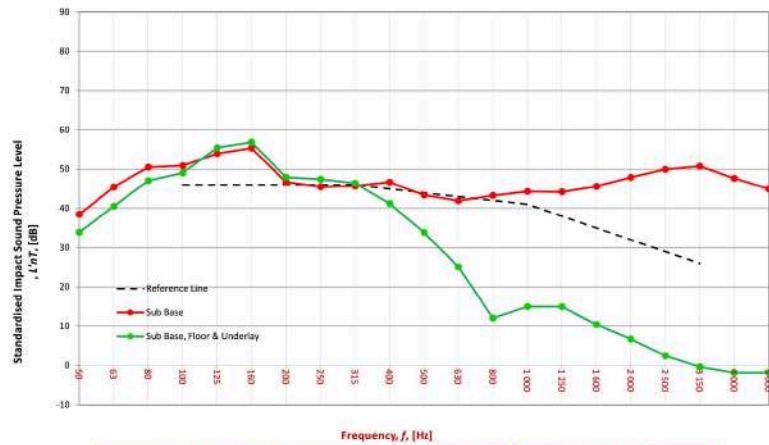

Sub Base	
$L'_{nT,w}$	55
CI	-9
CI(50-2500)	-9
CI(63-2000)	-9
AAAC	3 Star
FIIC	49

Sub Base & Floor	
$L'_{nT,w}$	N/A
CI	N/A
CI(50-2500)	N/A
CI(63-2000)	N/A
AAAC	5 Star
FIIC	N/A

Sub Base, Floor & Underlay	
$L'_{nT,w}$	44
CI	1
CI(50-2500)	2
CI(63-2000)	2
AAAC	5 Star
FIIC	63

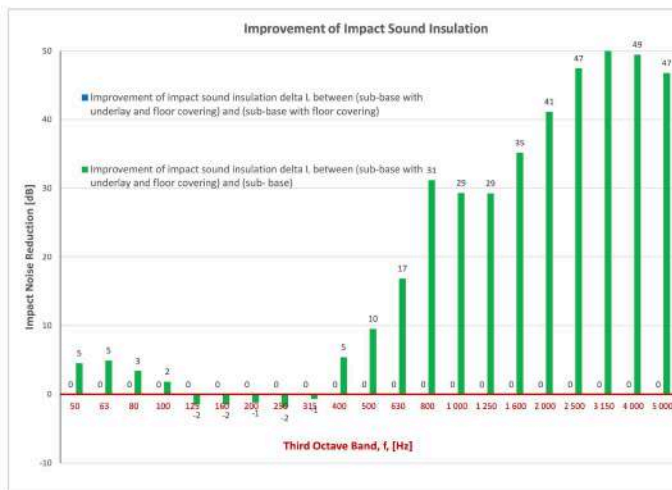

#### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
$L'_{nT,w}$	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

## Part 8: Acoustic Test (12mm Laminate + EQW512 + 2mm IXPE)

System Tested	$L'_{nTw}$ <sup>3</sup>	FIIC <sup>4,5</sup>	AAAC <sup>6</sup>
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
12mm Laminate Flooring + EQW512 Rubber Wavy Underlay + 2mm IXPE	43	64	5

### FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test: Tuesday, 29 March 2022  
 Project No.: 3523  
 Testing Company: Koikas Acoustics  
 Checked by: Nick Koikas  
 Place of Test: Residential apartments in Sydney, NSW  
 Client: Everfloor / EverQuiet  
 Client Address: -


Description of Floor System	Name	Thickness (mm)	Density (S)
12 mm laminate flooring		12	--
5 mm EverQuiet Rubber Wavy EQW512 + 2 mm EverQuiet IXPE		7	--
Concrete slab		180-200	--
Suspended ceiling		80-150	--

Room Dimensions	Width	Length	Area
Room	5 m	8 m	40.00 m <sup>2</sup>
Floor	5 m	8 m	40.00 m <sup>2</sup>
Sample Dimensions	1 m	1 m	1 m <sup>2</sup>

Receiver Rm	Location	Width	Length	Area	Height	Volume
5	Bedroom/Dining/Living directly	5	8	40.00	2.7	108.00

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Timber	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	38.5	N/A	38.5
63	45.4	N/A	45.1
80	50.4	N/A	46.5
100	50.9	N/A	49.5
125	53.9	N/A	55.4
160	55.3	N/A	55.3
200	46.7	N/A	47.2
250	45.5	N/A	46.2
315	45.7	N/A	47.0
400	46.6	N/A	44.7
500	43.4	N/A	36.3
630	41.9	N/A	27.9
800	43.3	N/A	22.2
1000	44.3	N/A	14.9
1250	44.2	N/A	15.0
1600	45.6	N/A	10.4
2000	47.9	N/A	6.7
2500	49.9	N/A	2.5
3150	50.7	N/A	-0.4
4000	47.6	N/A	-1.9
5000	44.9	N/A	-1.8

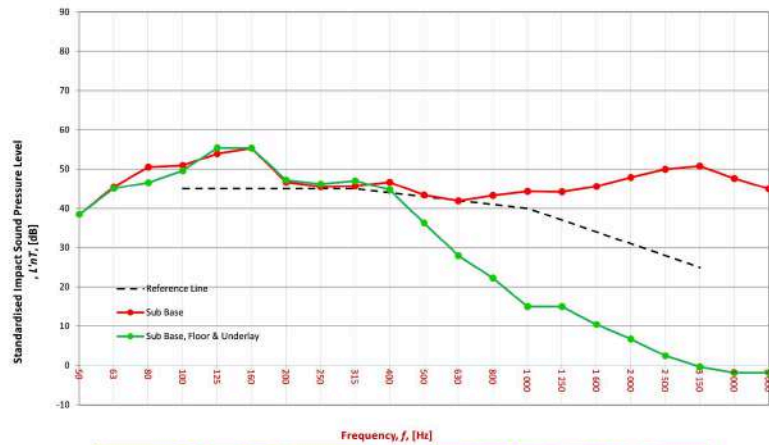

Sub Base	
$L'_{nT,w}$	55 AS ISO 717.2 - 2004
CI	-9 AS ISO 717.2 - 2004
CI(50-2500)	-9 AS ISO 717.2 - 2004
CI(63-2000)	-9 AS ISO 717.2 - 2004
AAAC	3 Star
FIIC	49 ASTM E1007-14

Sub Base & Floor	
$L'_{nT,w}$	N/A AS ISO 717.2 - 2004
CI	N/A AS ISO 717.2 - 2004
CI(50-2500)	N/A AS ISO 717.2 - 2004
CI(63-2000)	N/A AS ISO 717.2 - 2004
AAAC	5 Star
FIIC	N/A ASTM E1007-14

Sub Base, Floor & Underlay	
$L'_{nT,w}$	43 AS ISO 717.2 - 2004
CI	2 AS ISO 717.2 - 2004
CI(50-2500)	2 AS ISO 717.2 - 2004
CI(63-2000)	2 AS ISO 717.2 - 2004
AAAC	5 Star
FIIC	64 ASTM E1007-14

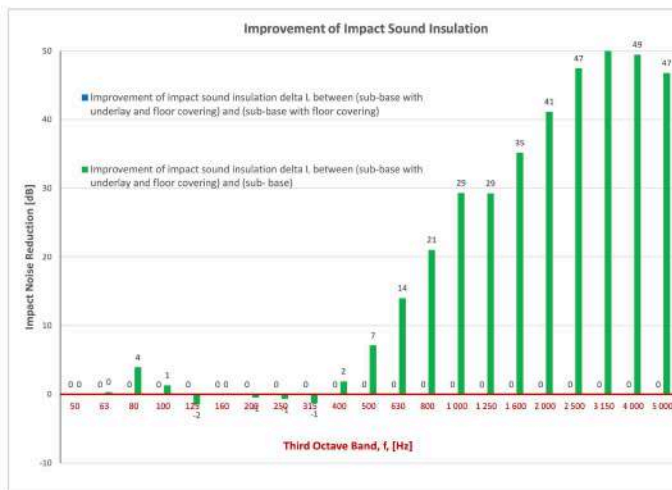

#### Definitions of Noise Metrics

**FIIC:**  
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m<sup>2</sup> as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

**L'nT,w:**  
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

**CI:**  
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100- and 2500 Hz.

**CI(50-2500):**  
Same as above, but for the frequency range 50 -2500 Hz.

**CI(125-2000):**  
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
$L'_{nT,w}$	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Inaudible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit [everfloor.com.au](http://everfloor.com.au) for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025