

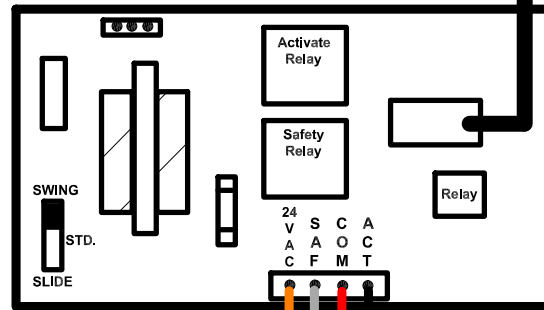


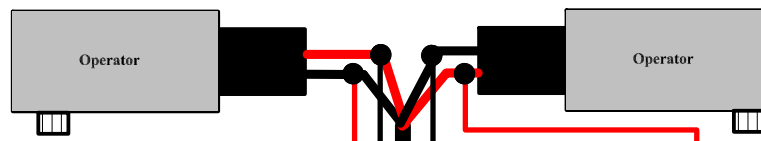

NOTE:
Safety slide switch must be set to **SWING** safety. Swing logic on the Gyrotech analog control will slow the door only (not stop). When the door is fully closed and a person is detected in the swing area, upon activation the door will creep open.




INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.

OC-904C T dipswitch Setting Chart		
	OFF	ON
1. Safety relay contact	N.O.	N.C.
2. Stall relay contact	N.O.	N.C.
3. Activation operation	Auto.	Knowing Act
4. Test input	Enable	Disable
5. Test output	High	Low
6. Test output "Activation"	Enable	Disable
7. Mandatory	OFF	
8. Mandatory	OFF	

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

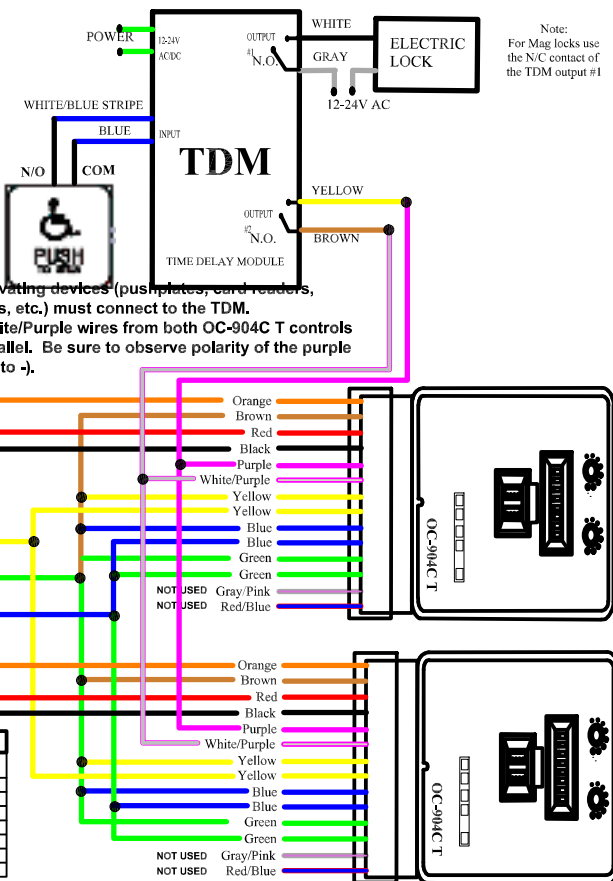

NOTE: All activating devices (pushplates, card readers, motion sensors, etc.) must connect to the TDM. Purple and White/Purple wires from both OC-904C T controls connect in parallel. Be sure to observe polarity of the purple wires (+ to +, - to -).

Note:
For Mag locks use the N/C contact of the TDM output #1

Title: 16300600 Gyrotech 300/400 Analog Sim. Pair w/ Elite T and Electric Lock		Drawing # 16300600
Drawing By: JCK	Date: 07-21-16	Sheet: 1 of 1
OPTEx Technologies Inc. 18730 S. Wilmington Ave. Unit 100 Rancho Dominguez, CA. 90220 800-877-6656 FAX 310-898-1098		