

Product Summary

Part 1 : Dimensions

Oak Designs

The following specifications apply to Beige Oak, Blossom, Biscotti, Ridge, Summit, Glacier, Dusky Oak, and Sunrise

| | | |
|---------------------------|----------------|--------|
| Dimensions | 1680 x 228 x 9 | mm |
| Underlay Thickness | 2 | mm |
| Boards Per Box | 4 | planks |
| Box Size | 1.532 | sqm |
| Box Weight | 22.6 | kg |

Australian Timber Designs

The following specifications apply to Light Blackbutt, Summer Blackbutt, Spotted Gum and Ironbark

| | | |
|---------------------------|----------------|--------|
| Dimensions | 1680 x 182 x 9 | mm |
| Underlay Thickness | 2 | mm |
| Boards Per Box | 5 | planks |
| Box Size | 1.528 | sqm |
| Box Weight | 22.6 | kg |

Note: Grand Alpine 9mm in Australian Timber colours are narrower at 182mm wide for a more authentic real timber look to mimic the look of real Australian Eucalyptus Timber. They also feature an additional 20% unique planks compared to wider board designs, for a less repetitive and more natural look.

Part 2 : General Data

| | |
|--------------------------|---|
| Click Lock System | Angle to Angle |
| Core Type | SPC (stone plastic composite / stone polymer composite) |



| | |
|--------------------------------|--|
| Wear Resistance | 0.7mm Wear Layer with: <ul style="list-style-type: none"> • Ultra-Matte Finish • Anti-Scratch Lacquer • Anti-Stain Lacquer |
| Finish | <p>Oak Designs 3D Embossed-in-Register - surface embossing texture matches the print layer for greater authenticity.</p> <p>Aus Timber Designs Light Embossed Surface</p> |
| Installation Method | Click Floating Installation |
| Underlay | IXPE (cross-linking polyethylene) |
| Impact Sound Resistance | <p>9mm Hybrid: 40 Lntw (AAAC 6 Star) 9mm Hybrid + 3mm Rubber EQ312: 42 (AAAC 5 Star) 9mm Hybrid + 5mm Rubber EQ512: 42 (AAAC 5 Star)</p> <p>Note: All acoustic data provided are indicative of outcomes only and cannot guarantee performance as every building is different. See testing datasheet extracts at the bottom of this PDF.</p> |
| Profile | Micro Bevel |
| Pattern Repeat | <p>Over 15 Planks for Australian Timber Designs Over 12 Planks for Oak Designs Up to 100 variations with pattern shifts as the print moves its way along the plank.</p> |

Part 3 : Warranty

| | | |
|----------------------------|----|-------|
| General Residential | 25 | Years |
| General Commercial | 5 | Years |



Slip Testing (AS 4586-2013)

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106
1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-000870
Issue Date : 2/04/2025
Print Date : 2/04/2025

**AS 4586-2013
Appendix A**

Slip Resistance Classification of new Pedestrian Surface Materials

Wet Pendulum Test Method

| | | | | | | | |
|---|----|----|----|----|----|-----|-----------------------|
| Date of Testing | | | | | | | 02-04-2025 |
| Operator | | | | | | | AWTA Test Operator 14 |
| Test Temperature (20±5degC) | | | | | | | 22 °C |
| Specimens Washed with pH Neutral detergent then Dried | | | | | | | |
| Test Direction | | | | | | | Length |
| Fixed/Unfixed | | | | | | | Unfixed |
| Slider No 96 Batch No | | | | | | | 33 |
| Length | 1 | 2 | 3 | 4 | 5 | SRV | |
| British Pendulum number | 30 | 33 | 31 | 34 | 34 | 32 | |
| Classification | | | | | | | P2 |

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023
Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.

346489

75956

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald
APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc (Hons)
MANAGING DIRECTOR

0204/11/06



Fire Testing (AS ISO 9239.1-2003)



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-000970
Issue Date : 14/04/2025
Print Date : 14/04/2025

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 18-03-2025

Date Tested 14-04-2025

| CHF Value | 1 | 2 | 3 | Mean |
|-----------|-------|------|------|------------------------|
| Length | 10.4 | 10.4 | 10.4 | 10.4 kW/m ² |
| Width | ≥11.0 | - | - | - kW/m ² |

| Smoke Value | 1 | 2 | 3 | Mean |
|-------------|----|----|----|----------|
| Length | 42 | 60 | 52 | 51 % min |
| Width | 64 | - | - | - % min |

Observation
Blistering Yes

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

347475 76061

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald
APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc (Hons)
MANAGING DIRECTOR

0204/11/06

Acoustic Test : Grand Alpine 9mm Hybrid

| System Tested | L' nTw ³ | FIC ^{4,5} | AAAC ⁶ |
|--|---------------------|--------------------|-------------------|
| Bare Concrete Floor (ECFS only) - for comparison purposes only | 54 | 50 | 3 |
| Grand Alpine 9mm Hybrid | 40 | 67 | 6 |

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test : Thursday, 11 December 2025
 Project No. : 3523
 Testing Company : Koikas Acoustics
 Checked by : James Tsevrementzis
 Place of Test : Residential Unit in Forest Lodge (Living/Dining)
 Client : Everfloor
 Client Address : -

| Description of Floor System | Name | Thickness (mm) | Density (SI) |
|--------------------------------|------|----------------|--------------|
| Everfloor Hybrid | | 9 | - |
| Concrete Sub Base | | -- | -- |
| Suspended Plasterboard Ceiling | | -- | -- |
| 0 | | -- | -- |


Room Dimensions
 Width : 4.4 m
 Length : 8.2 m
 Area : 36.08 m²

Sample Dimensions
 Width : 1 m
 Length : 1 m
 Area : 1 m²

| Receiver Rm | Location | Width | Length | Area | Height | Volume |
|-------------|----------------------------|-------|--------|-------|--------|--------|
| | Unit below (Living/Dining) | 4.4 | 8.2 | 36.08 | 2.7 | 97.42 |

| Room Surfaces | | |
|---------------|--------|--------------|
| Walls | Floor | Ceiling |
| Plasterboard | Carpet | Plasterboard |


| Frequency f Hz | L'nT (one-third octave) dB | | |
|----------------|----------------------------|----------------|-------------------------|
| | Sub Base | Sub Base Floor | Sub Base Floor Underlay |
| 50 | 53.7 | NA | 50.2 |
| 63 | 54.5 | NA | 53.5 |
| 80 | 53.1 | NA | 53.2 |
| 100 | 49.7 | NA | 48.9 |
| 125 | 54.1 | NA | 52.4 |
| 160 | 49.0 | NA | 46.7 |
| 200 | 47.2 | NA | 45.0 |
| 250 | 44.8 | NA | 42.7 |
| 315 | 45.4 | NA | 40.4 |
| 400 | 43.6 | NA | 39.6 |
| 500 | 46.9 | NA | 44.8 |
| 630 | 43.5 | NA | 36.4 |
| 800 | 42.9 | NA | 28.2 |
| 1000 | 46.5 | NA | 24.0 |
| 1250 | 43.8 | NA | 17.3 |
| 1600 | 43.2 | NA | 16.0 |
| 2000 | 47.4 | NA | 16.9 |
| 2500 | 49.9 | NA | 16.7 |
| 3150 | 49.1 | NA | 15.6 |
| 4000 | 46.3 | NA | 14.1 |
| 5000 | 43.3 | NA | 13.0 |

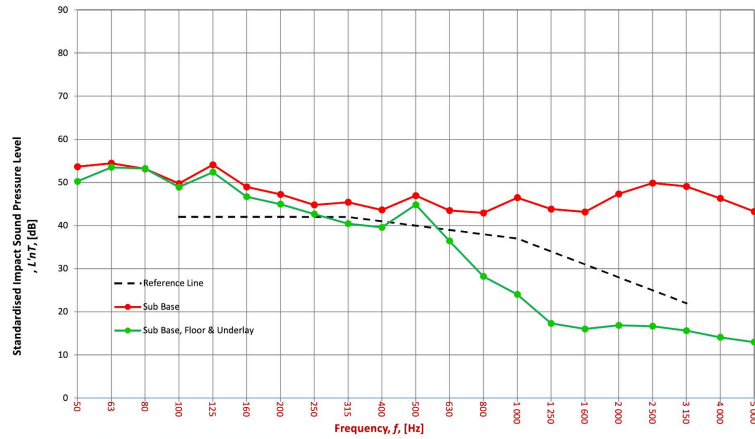

| Sub Base | |
|-------------|------------------------|
| L'nT,w | 54 AS ISO 717.2 - 2004 |
| CI | -9 AS ISO 717.2 - 2004 |
| CI(50-2500) | -7 AS ISO 717.2 - 2004 |
| CI(63-2000) | -8 AS ISO 717.2 - 2004 |
| AAAC★ | 3 Star AAAC Guideline |
| FIC | 50 ASTM E1007-14 |

| Sub Base & Floor | |
|------------------|------------------------|
| L'nT,w | NA AS ISO 717.2 - 2004 |
| CI | NA AS ISO 717.2 - 2004 |
| CI(50-2500) | NA AS ISO 717.2 - 2004 |
| CI(63-2000) | NA AS ISO 717.2 - 2004 |
| AAAC★ | NA AAAC Guideline |
| FIC | NA ASTM E1007-14 |

| Sub Base, Floor & Underlay | |
|----------------------------|------------------------|
| L'nT,w | 40 AS ISO 717.2 - 2004 |
| CI | 1 AS ISO 717.2 - 2004 |
| CI(50-2500) | 5 AS ISO 717.2 - 2004 |
| CI(63-2000) | 4 AS ISO 717.2 - 2004 |
| AAAC★ | 6 Star AAAC Guideline |
| FIC | 67 ASTM E1007-14 |

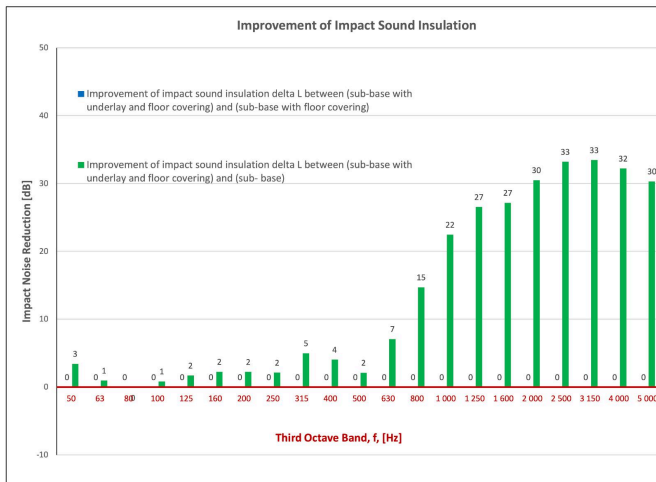

Definitions of Noise Metrics

FIC:
 Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m² as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:
 The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

CI:
 Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

CI(50-2500):
 Same as above, but for the frequency range 50 -2500 Hz.

CI(125-2000):
 Same as above, but for the frequency range 125 -2000 Hz.

| AAAC Star R. | 2 | 3 | 4 | 5 | 6 |
|--------------|--------------|-----------------|---------|----------------|--------------------|
| L'nT,w | 65 | 55 | 50 | 45 | 40 |
| FIC | 45 | 55 | 60 | 65 | 70 |
| Comments | Below BCA 62 | Clearly Audible | Audible | Barely Audible | Normally Inaudible |

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025

