


Fixture Type:	
Model Number:	
Project:	

ACM Series Steel Emergency Lighting



ORDERING GUIDE

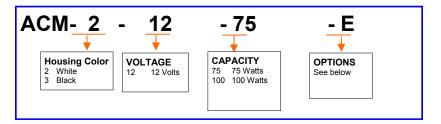

OPTIONS

V Voltmeter* Α Ammeter* RT Remote Test Ε Self Diagnostics** TD Time Delay 0H No Heads 1H 1Head 3H 3 Heads Side Mounted Heads SM

ML Metal Heads


CP Cord and Plug (120 VAC) Nickel Cadmium Battery

SELF-TEST / DIAGNOSTIC (Optional)

- Microprocessor controlled state of the art self-diagnostic system
- Automatic 15 minute monthly, and, 90 minute yearly discharge tests
- Visual and Audible indicators for the following conditions:
 - Transfer failure
 - Charger malfunction
 - Defective battery
 - Burnt out lamp

RT - Remote test (Optional)

Allows user to initiate a momentary test of the emergency lighting from up to 20 feet away. Infra red remote (IRT) not included.



DIMENSIONS

Models	Length (in)	Height (in)*	Width (in)
All	121/8	141/8	43/4

Measured to the top of the lighting heads



STANDARD FEATURES

- Universal 120/277 volt 60 Hz input other voltages available upon request
- Fully automatic solid state charger returns battery to full charge according to UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout
- Brownout protection.
- High charge and AC ready LED indicators.
- Test switch
- Long life maintenance free valve regulated lead acid battery
- Minimum of 90 minutes of emergency illumina-
- Heavy duty steel construction with a bright white finish. (Other colors available)
- Supplied with two top mounted PAR36 type heads with 9 watt wedge base lamps.
- Remote test is available and requires an Infra Red hand held tester.
- MADE IN THE USA

AGENCY APPROVALS

ETL Listed to UL924.

Meets or exceeds the requirements of the National Electrical Code and NFPA 101.

WARRANTY

One year warranty from date of shipment on entire unit. Battery will carry additional pro-rata warranty. See Warranty Statement for details.

Carpenter Emergency Lighting

Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691 www.carpenterlighting.com

^{*} Only one meter may be installed. ** Not available in 12 volt NiCad units