

Technical Summary

Part 1 : Dimension

Width	238 (Oak Designs) 196 (Australian Designs)	mm
Length	1518	mm
Thickness	10.3	mm
Boards Per Box	6	planks
Box Size	2.16769sqm (Oak Designs) 1.78518sqm (Australian Timber Designs)	sqm

Part 2 : General Data

Click Lock System	Valinge, Angle-to-Angle
Core Type	Waterproof HDF Core
Wear Resistance	Aluminium Oxide EN33 / AC5
Finish	3D EIR (Oak) or Anti-Slip Matte (Australian)
Installation Method	Floating Installation
Stain Resistant	Yes
Fade Resistant	Yes
Slip Resistance (AS 4586:2013 Appendix A)	P3 (Reported SRV 39)
Impact Sound Resistance	41 Lntw (AAAC 5 Star) - as a guidance only
Box Weight	17.3KG (Oak - wide board), 14.5KG (Aus - standard board)
Profile	Micro V Groove
Pattern Repeat	Double Pattern Repeat - 10 - 12 pure non repeating planks, greater quantity if variants are included.

Technical Summary

Part 3 : Warranty

General Residential	25	Years
Light Commercial	5	Years

Part 4 : Test Report Downloads

- ◆ Acoustic Test Certificate
- ◆ Slip Test Certificate
- ◆ Fire Test Certificate



WoodGuard 10mm Hybrid Flooring

koikasacoustics PTY LTD

CONSULTANTS IN NOISE & VIBRATION

Standardised impact sound pressure level according to ISO 16283-2

Field measurements of impact sound insulation of floors


Client : Everfloor VBL Import Pty Ltd
Test site: Residential Unit in Forest Lodge

Date of Test : Monday, 24 August 2026

Description and identification of the building construction and test arrangements, direction of measurement :
Test 01: 10.3 mm hybrid flooring over ECFS

Receiving room volume : 26.5356

Frequency <i>f</i> Hz	L'nT Test sample dB	Bare L'nT dB substrate dB
50	39.9	43.6
63	36.6	39.1
80	34.8	38.7
100	32.7	35.1
125	36.1	38.6
160	34.5	37.6
200	37.0	40.6
250	36.0	39.3
315	36.6	44.1
400	33.6	38.7
500	35.2	41.7
630	28.4	40.5
800	25.6	41.6
1 000	22.2	42.5
1 250	19.2	42.1
1 600	17.1	44.0
2 000	17.5	47.3
2 500	17.5	51.4
3 150	16.9	50.8
4 000	16.1	51.4
5 000	15.4	50.5
L_{nT,w}	31	55
C_i	-1	-14
L_{nT,w} + C_i	29	40
ΔL_{nT,w}	24	
FIIC	80	56
AAAC Star	6 Star	3 Star

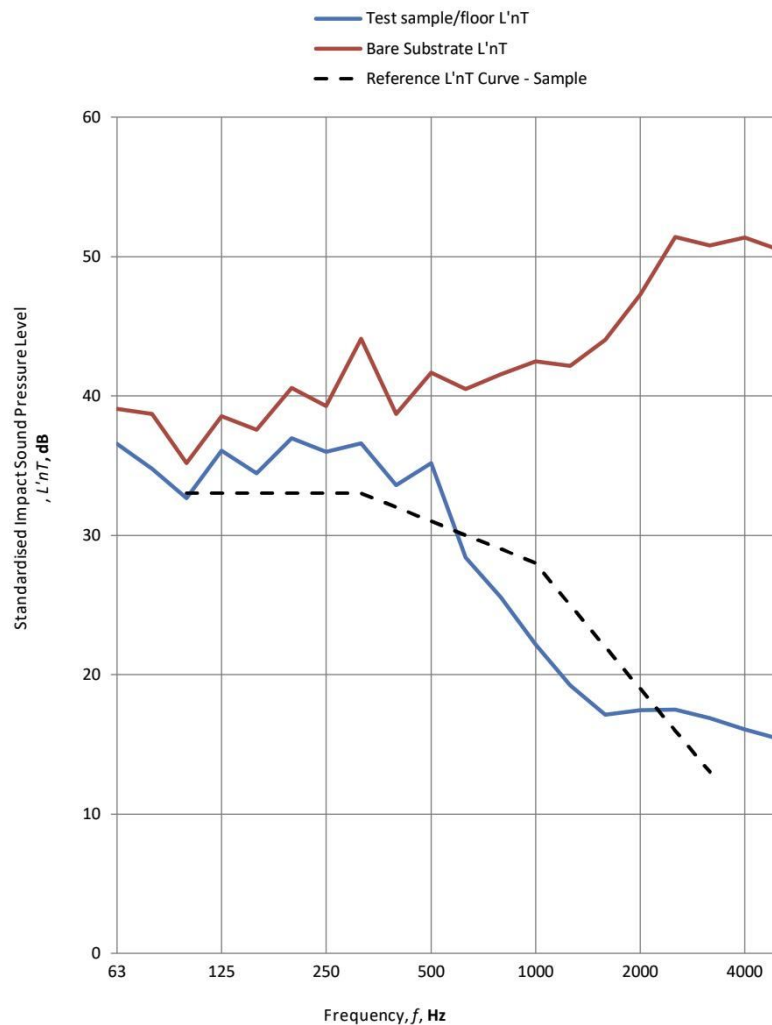

Rating according to ISO 717-2

Evaluation based on field measurement results obtained in one-third-octave bands by an engineering method.

Project No. : 3523
Issue Date : Tuesday, 25 August 2026

Testing organisation : Koikas Acoustics Pty Ltd


Signature :



WoodGuard 10mm Hybrid Flooring

Technical Data Sheet - Standardised Impact Sound Pressure Level Impact Sound Insulation Testing of Floorboards VBL Import Pty Ltd T.A. EVERFLOOR

Testing Date: Friday, 7 February 2025
Test No.: 05
Client/Owner: VBL Import Pty Ltd T.A. EVERFLOOR
Testing Location: Residential apartment in Hurstville NSW
Floor Finish: 10mm Hybrid Flooring
Acoustic Underlay: Built-in
Sub-base & ceiling below: Reinforced concrete slab
Suspended ceiling cavity with plasterboard ceiling
Source Room: Living area on the upper floor level
Receiver Room: Living area on the lower floor level directly below
Approx. receiver room vol: 60.28

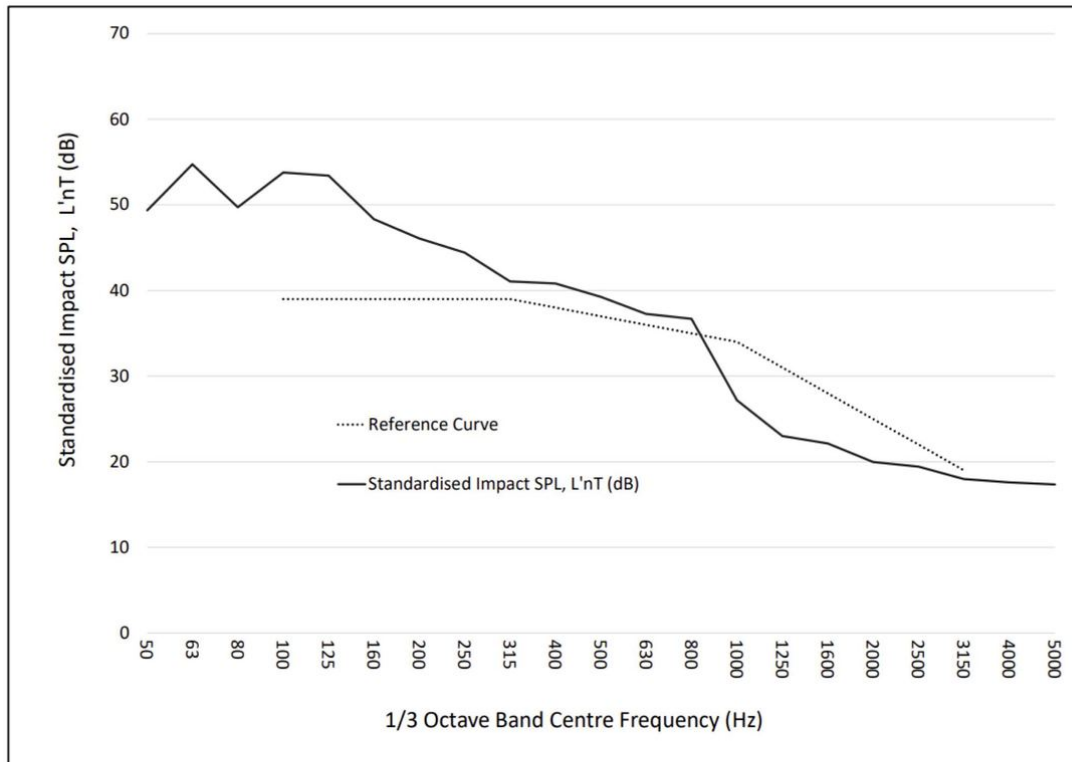

1/3 Octave Band Centre Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
L'nT [dB]	49.3	54.7	49.7	53.8	53.4	48.3	46.1	44.4	41.1	40.8	39.2	37.3	36.7	27.2	23.0	22.1	20.0	19.4	18.0	17.6	17.4

Acoustical Rating

Measured Weighted Standardised Sound Level Difference, **L'nTw**

41

Field Impact Isolation Class, **FIIC**

63

AAAC **Star Rating**

5

Reference/Guideline

AS ISO 717.2 - 2004

ASTME1007-14

AAAC Guideline

Testing Date : Friday, 7 February 2025

Reference No.: 3874

Testing Organisation: Contrix Pty Ltd

Tested By: Michael Fan Chiang
BE(Mech), MAAS

Contrix Pty Ltd

ABN: 95 632 593 625

E-mail: info@contrix.com.au

Tel: +61 425 240 555

www.contrix.com.au/acoustics

Disclaimers:


- The information provided in this report relates to sound insulation of floor coverings & underlays only.
- Contrix Pty Ltd does not provide products or installation services of hard floor coverings/underlay, therefore, not responsible or liable for any product defects.
- This testing report is site-specific and only applies to the subject premise for the tested product as specified in this document.
- It is imperative to strictly adhere to the installation guidelines provided by the supplier or installation instructions. Contrix Pty Ltd bears no liability in the event of non-compliance with these instructions.
- The acoustic rating typically varies by up to 3 L'nTw rating points, influenced by the placement of the tapping machine, testing locations within the unit, and the junction details between the floorboards, skirting, scotia, and walls. Many strata management and certifying authorities permit a tolerance of 3 L'nTw rating points. Furthermore, deviations of up to 5 L'nTw rating points have been recorded in rare cases.
- The use of any glue or adhesive can negatively impact the acoustic rating. Based on previous testing data, a degradation of up to 5 L'nTw rating points has been recorded.
- The test results detailed in this report are intended solely for use as design guidelines and should not be interpreted as formal certification of the tested products.
- It is highly recommended to engage a qualified acoustic consultant (Contact Contrix Pty Ltd on +61 425 240 555 or other qualified consultants) to conduct in-situ testing (field testing) prior to flooring installation.



WoodGuard 10mm Hybrid Flooring + EVERQUIET EQ312

Technical Data Sheet - Standardised Impact Sound Pressure Level Impact Sound Insulation Testing of Floorboards VBL Import Pty Ltd T.A. EVERFLOOR

Testing Date: Friday, 7 February 2025
Test No.: 06
Client/Owner: VBL Import Pty Ltd T.A. EVERFLOOR
Testing Location: Residential apartment in Hurstville NSW
Floor Finish: 10mm Hybrid Flooring
Acoustic Underlay: 3mm Rubber EQ312
Sub-base & ceiling below: Reinforced concrete slab
Suspended ceiling cavity with plasterboard ceiling
Source Room: Living area on the upper floor level
Receiver Room: Living area on the lower floor level directly below
Approx. receiver room vol: 60.28

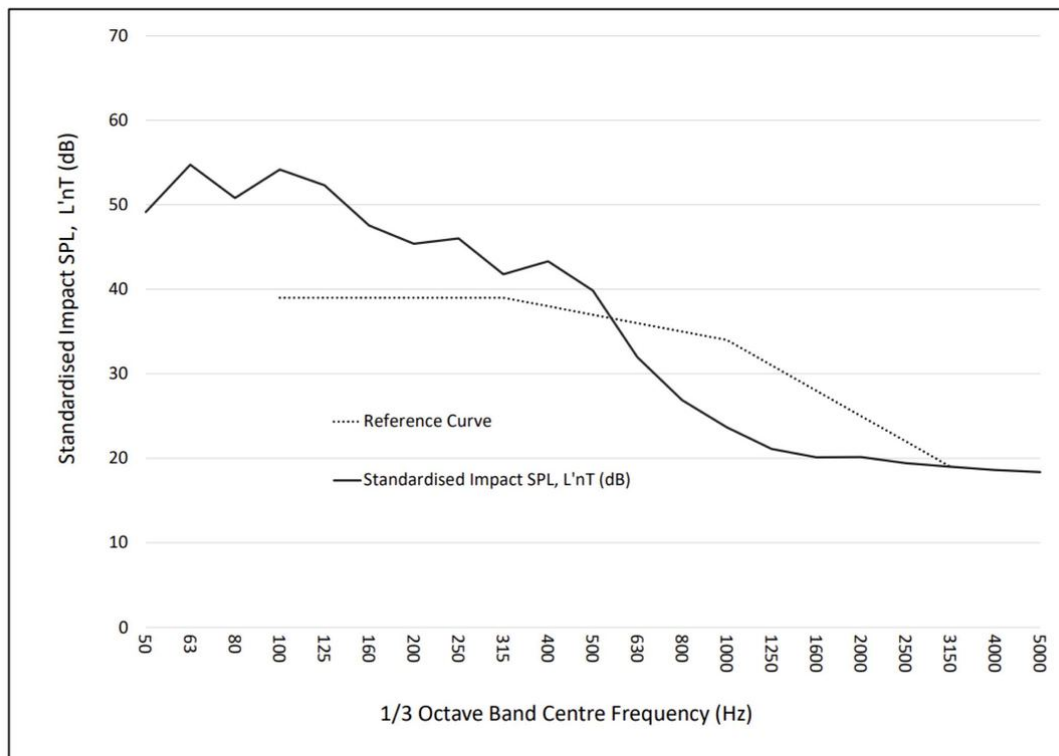

1/3 Octave Band Centre Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
L'nT [dB]	49.1	54.7	50.8	54.2	52.3	47.5	45.4	46.0	41.8	43.3	39.8	32.0	26.9	23.7	21.1	20.1	20.2	19.4	19.0	18.6	18.4

Acoustical Rating

Measured Weighted Standardised Sound Level Difference, **L'nTw**

41

Field Impact Isolation Class, **FIIIC**

62

AAAC **Star Rating**

5

Reference/Guideline

AS ISO 717.2 - 2004

ASTME1007-14

AAAC Guideline

Testing Date : Friday, 7 February 2025

Reference No.: 3874

Testing Organisation: Contrix Pty Ltd

Tested By: Michael Fan Chiang

BE(Mech), MAAS

Contrix Pty Ltd

ABN: 95 632 593 625

E-mail: info@contrix.com.au

Tel: +61 425 240 555

www.contrix.com.au/acoustics

Disclaimers:


- The information provided in this report relates to sound insulation of floor coverings & underlays only.
- Contrix Pty Ltd does not provide products or installation services of hard floor coverings/underlay, therefore, not responsible or liable for any product defects.
- This testing report is site-specific and only applies to the subject premise for the tested product as specified in this document.
- It is imperative to strictly adhere to the installation guidelines provided by the supplier or installation instructions. Contrix Pty Ltd bears no liability in the event of non-compliance with these instructions.
- The acoustic rating typically varies by up to 3 L'nTw rating points, influenced by the placement of the tapping machine, testing locations within the unit, and the junction details between the floorboards, skirting, scotia, and walls. Many strata management and certifying authorities permit a tolerance of 3 L'nTw rating points. Furthermore, deviations of up to 5 L'nTw rating points have been recorded in rare cases.
- The use of any glue or adhesive can negatively impact the acoustic rating. Based on previous testing data, a degradation of up to 5 L'nTw rating points has been recorded.
- The test results detailed in this report are for use as design guidelines and should not be interpreted as formal certification of the tested products.
- It is highly recommended to engage a qualified acoustic consultant (Contact Contrix Pty Ltd on +61 425 240 555 or other qualified consultants) to conduct in-situ testing (field testing) prior to flooring installation.



WoodGuard 10mm Hybrid Flooring + EVERQUIET EQ512

Technical Data Sheet - Standardised Impact Sound Pressure Level Impact Sound Insulation Testing of Floorboards VBL Import Pty Ltd T.A. EVERFLOOR

Testing Date: Friday, 7 February 2025
Test No.: 07
Client/Owner: VBL Import Pty Ltd T.A. EVERFLOOR
Testing Location: Residential apartment in Hurstville NSW
Floor Finish: 10mm Hybrid Flooring
Acoustic Underlay: 5mm Rubber EQ512
Sub-base & ceiling below: Reinforced concrete slab
Suspended ceiling cavity with plasterboard ceiling
Source Room: Living area on the upper floor level
Receiver Room: Living area on the lower floor level directly below
Approx. receiver room vol: 60.28

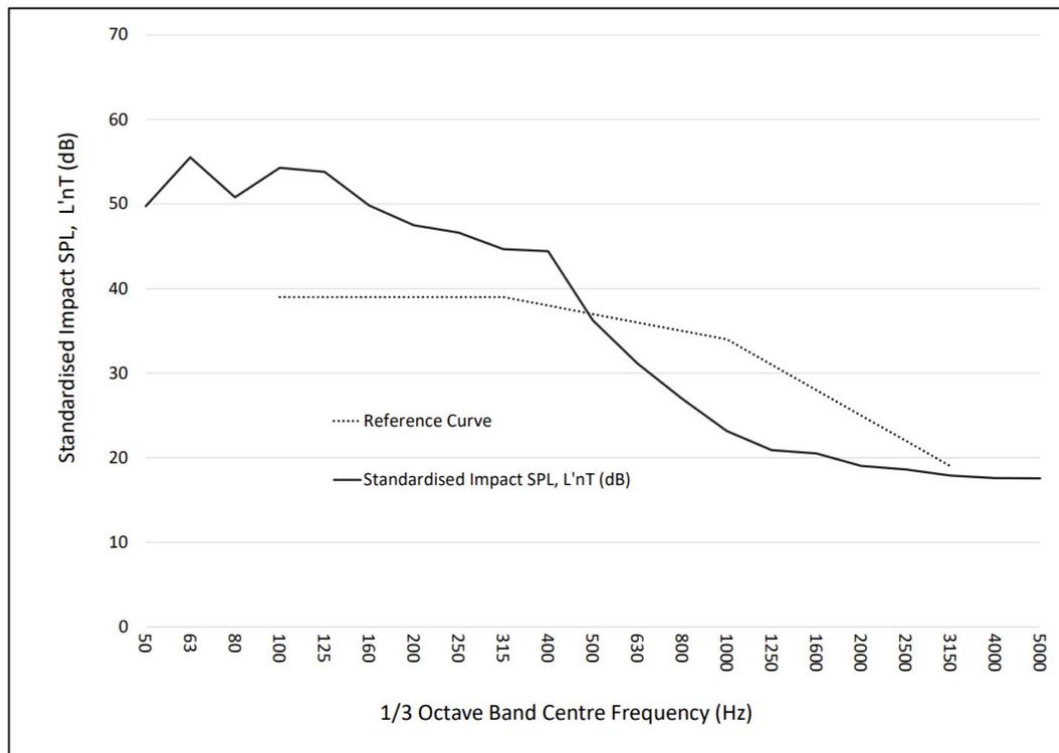

1/3 Octave Band Centre Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
L'nT [dB]	49.7	55.5	50.8	54.3	53.8	49.8	47.5	46.6	44.7	44.4	36.2	31.2	27.0	23.2	20.9	20.5	19.0	18.6	17.9	17.6	17.6

Acoustical Rating		Reference/Guideline	
Measured Weighted Standardised Sound Level Difference, L'nTw	43	AS ISO 717.2 - 2004	
Field Impact Isolation Class, FIC	62	ASTME1007-14	
AAAC Star Rating	5	AAAC Guideline	

Testing Date :	Friday, 7 February 2025		Contrix Pty Ltd ABN: 95 632 593 625 E-mail: info@contrix.com.au Tel: +61 425 240 555 www.contrix.com.au/acoustics
Reference No.:	3874		
Testing Organisation:	Contrix Pty Ltd		
Tested By:	Michael Fan Chiang BE(Mech), MAAS		

- Disclaimers:**
- The information provided in this report relates to sound insulation of floor coverings & underlays only.
 - Contrix Pty Ltd does not provide products or installation services of hard floor coverings/underlay, therefore, not responsible or liable for any product defects.
 - This testing report is site-specific and only applies to the subject premise for the tested product as specified in this document.
 - It is imperative to strictly adhere to the installation guidelines provided by the supplier or installation instructions. Contrix Pty Ltd bears no liability in the event of non-compliance with these instructions.
 - The acoustic rating typically varies by up to 3 L'nTw rating points, influenced by the placement of the tapping machine, testing locations within the unit, and the junction details between the floorboards, skirting, scotia, and walls. Many strata management and certifying authorities permit a tolerance of 3 L'nTw rating points. Furthermore, deviations of up to 5 L'nTw rating points have been recorded in rare cases.
 - The use of any glue or adhesive can negatively impact the acoustic rating. Based on previous testing data, a degradation of up to 5 L'nTw rating points has been recorded.
 - The test results detailed in this report are intended solely for use as design guidelines and should not be interpreted as formal certification of the tested products.
 - It is highly recommended to engage a qualified acoustic consultant (Contact Contrix Pty Ltd on +61 425 240 555 or other qualified consultants) to conduct in-situ testing (field testing) prior to flooring installation.



WoodGuard 10mm Hybrid Flooring + EVERQUIET EQ1012

Technical Data Sheet - Standardised Impact Sound Pressure Level

Impact Sound Insulation Testing of Floorboards

VBL Import Pty Ltd T.A. EVERFLOOR

Testing Date: Friday, 7 February 2025

Test No.: 08

Client/Owner: VBL Import Pty Ltd T.A. EVERFLOOR

Testing Location: Residential apartment in Hurstville NSW

Floor Finish: 10mm Hybrid Flooring

Acoustic Underlay: 10mm Rubber EQ1012


Sub-base & ceiling below: Reinforced concrete slab

Suspended ceiling cavity with plasterboard ceiling

Source Room: Living area on the upper floor level

Receiver Room: Living area on the lower floor level directly below

Approx. receiver room vol: 60.28

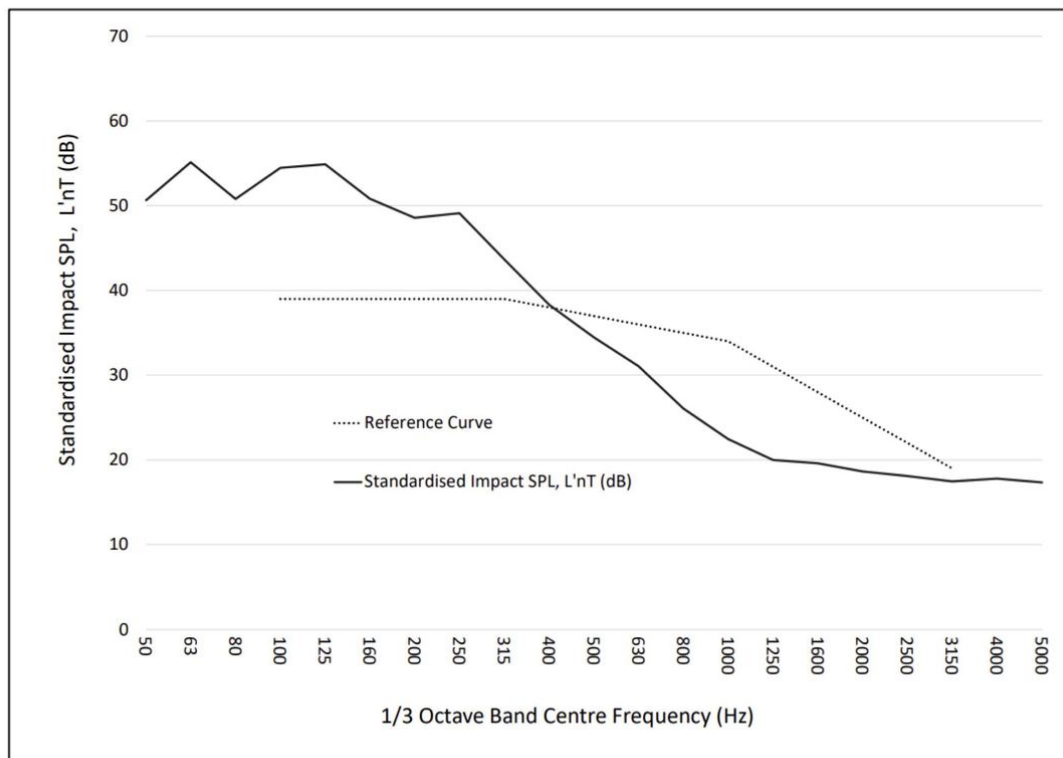

1/3 Octave Band Centre Frequency (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
L'nT [dB]	50.6	55.1	50.8	54.5	54.9	50.8	48.6	49.1	43.7	38.3	34.4	31.1	26.1	22.5	20.0	19.6	18.6	18.1	17.5	17.8	17.4

Acoustical Rating

Measured Weighted Standardised Sound Level Difference, L'nTw

44

Field Impact Isolation Class, FIIC

62

AAAC Star Rating

5

Reference/Guideline

AS ISO 717.2 - 2004

ASTME1007-14

AAAC Guideline

Testing Date: Friday, 7 February 2025

Reference No.: 3874

Testing Organisation: Contrix Pty Ltd

Tested By: Michael Fan Chiang

BE(Mech), MAAS

Contrix Pty Ltd

ABN: 95 632 593 625

E-mail: info@contrix.com.au

Tel: +61 425 240 555

www.contrix.com.au/acoustics

Disclaimers:

- The information provided in this report relates to sound insulation of floor coverings & underlays only.
- Contrix Pty Ltd does not provide products or installation services of hard floor coverings/underlay, therefore, not responsible or liable for any product defects.
- This testing report is site-specific and only applies to the subject premise for the tested product as specified in this document.
- It is imperative to strictly adhere to the installation guidelines provided by the supplier or installation instructions. Contrix Pty Ltd bears no liability in the event of non-compliance with these instructions.
- The acoustic rating typically varies by up to 3 L'nTw rating points, influenced by the placement of the tapping machine, testing locations within the unit, and the junction details between the floorboards, skirting, scotia, and walls. Many strata management and certifying authorities permit a tolerance of 3 L'nTw rating points. Furthermore, deviations of up to 5 L'nTw rating points have been recorded in rare cases.
- The use of any glue or adhesive can negatively impact the acoustic rating. Based on previous testing data, a degradation of up to 5 L'nTw rating points has been recorded.
- The test results detailed in this report are intended solely for use as design guidelines and should not be interpreted as formal certification of the tested products.
- It is highly recommended to engage a qualified acoustic consultant (Contact Contrix Pty Ltd on +61 425 240 555 or other qualified consultants) to conduct in-situ testing (field testing) prior to flooring installation.



WoodGuard 10mm Hybrid Flooring Slip Test



www.FloorSlipTest.com.au

Unit 4/40 Bessemer St
Blacktown NSW 2148
Phone 02 9621 3706

info@SafeEnvironments.com.au



7 June 2023

Test Report No. R28934.1b

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586-2013 Appendix A (Wet Pendulum Test)

The slip resistance classification has been determined for unused surfaces under specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface after classification. Standards Australia Handbook 198:2014 *Guide to the specification and testing of slip resistance of pedestrian surfaces* provides guidance for the selection of slip resistant pedestrian surfaces classified in accordance with AS 4586-2013. It is recommended that this test report be read in conjunction with AS 4586, HB 197 & HB 198.

Requested by: Everfloor
Client Address: 4/2 Forge Street
Blacktown NSW 2148
Product Manufacturer: Everfloor
Product Description: Crest Hybrid Flooring
Test conducted according to: AS 4586:2013 Appendix A
Sampling Procedures: Performed by client and tested as received.
Location: 4/40 Bessemer Street, Blacktown NSW 2148
Conducted by: Yuliana Vargolomova
Date: 02 June 2023
Sample: Unfixed
Rubber slider used: Slider 96
Slope of specimen: Tested on a flat level surface
Direction of Test: With Profile
Temperature: 18°C
Cleaning: None
Conditioned: Grade P 400 paper dry followed by wet lapping film

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	43	45	36	34	39

Reported SRV of Sample:	39
Class:	P3

The expanded uncertainty (U_{95}) at the 95% level of confidence with a coverage factor (k) of 2 has been estimated to be 3 BPN or 8 %, whichever is the greater; sampling uncertainty has not been included. The expanded uncertainty should be considered when interpreting results or assessing conformity. Results relate only to items tested.

WoodGuard 10mm Hybrid Flooring Fire Test

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-004543
Issue Date : 24/11/2025
Print Date : 25/11/2025

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 21-10-2025

Date Tested 21-11-2025

CHF Value	1	2	3	Mean
Length	≥11.0	≥11.0	≥11.0	≥11.0 kW/m ²
Width	≥11.0	-	-	- kW/m ²
Smoke Value	1	2	3	Mean
Length	4	2	5	4 %.min
Width	1	-	-	- %.min

Observation

Blistering Yes

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

365154

80274

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.




Fiona McDonald

APPROVED SIGNATORY



MICHAEL A. JACKSON B.Sc (Hons)
MANAGING DIRECTOR

0204/11/06



WoodGuard 10mm Hybrid Flooring Formaldehyde Testing



Test Report

Issue Date: 2023-01-31

Intertek Report No. 230104002SHF-003

Test Items, Method and Results:

Test Item: Formaldehyde content test

Test Method: As per ASTM D6007-22 small scale chamber method, formaldehyde content was detected by UV-VIS spectrophotometer.

Test condition:

Chamber type:	1 m ³ stainless steel chamber
Climatic conditions:	25°C, 50% R.H.
Air exchange rate:	0.5 h ⁻¹
Loading factor:	0.43 m ² /m ³
Test result:	ND

Note:

1. ppm = parts of formaldehyde per million parts air
2. Detection limit = 0.02 ppm
3. ND = Not detected (less than the detection limit)
4. The sample was conditioned at 24±3 °C, 50±5% relative humidity for seven days before the testing.
5. Test location: Central Chemical Lab of Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Address: E701. No. 7-2. Caipin Road, Guangzhou Science City, GETDD Guangzhou, China 510663