


INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Ensure Operator Cam settings are correct. If slightly off, may cause Sensor setup issues.
3. When using two controls (Sim Pair, Double Egress) wire each control as shown and add sync lines between controls on TB1 pins 1,2, 3 and 7.
4. On Knowing Act applications, push/pull activation must not be used.
5. Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.

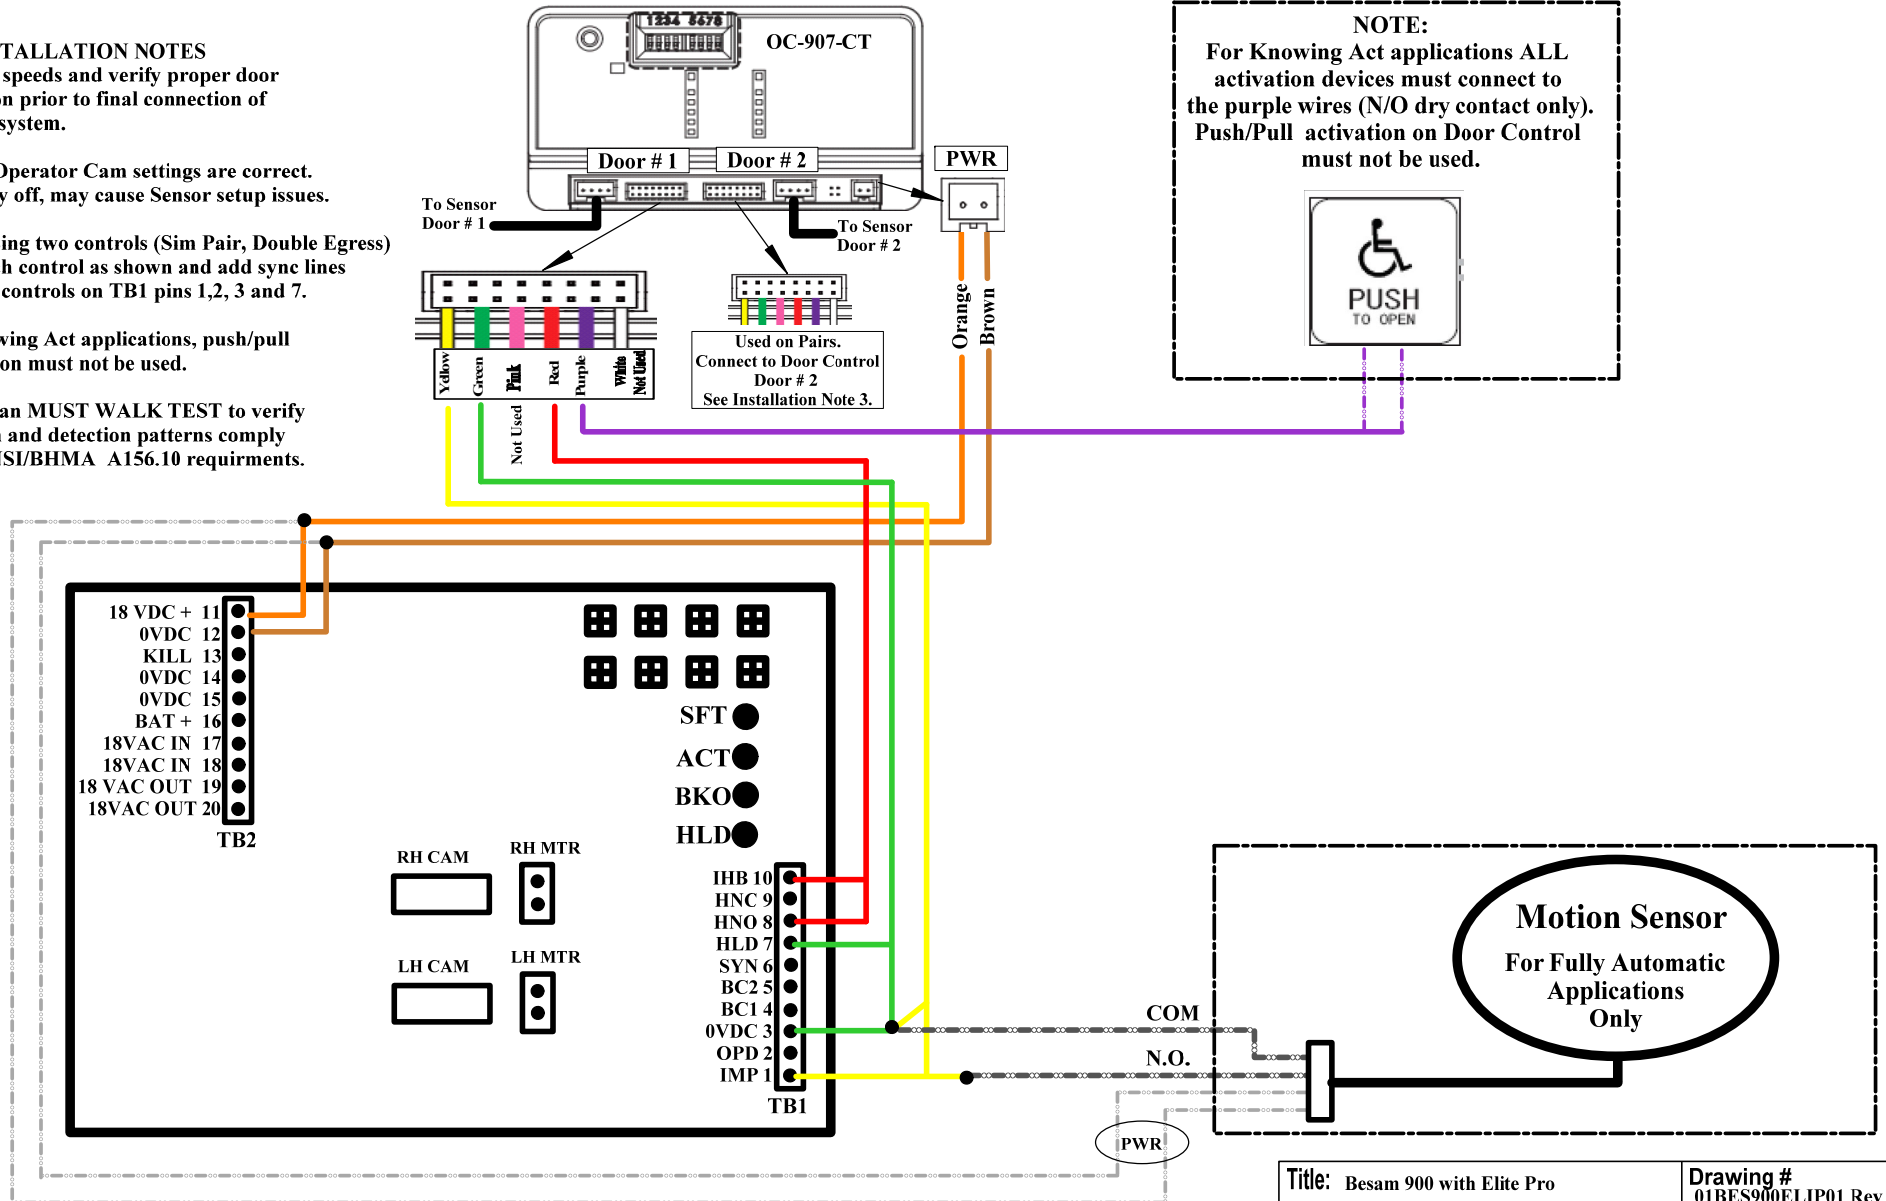

Title: Besam 900 with Elite Pro		Drawing # 01BES900ELIP01 Rev 1
Drawing By: JAS	Date: 09-10-24	Sheet: 1 of 1
Optex Technologies Inc. 10741 Walker St., Suite 300, Cypress, CA 90630 Office: (800)877-6656, Fax: (310)214-8644		