



Product Summary

Part 1 : Dimensions

Width	180	mm
Length	1220	mm
Total Thickness	3	mm
Wear Layer	0.55	mm
Boards Per Box	16	planks
Box Size	3.514	sqm

Part 2 : General Data

Core Type	PVC Vinyl (100% Virgin)
Wear Resistance	0.55mm
Finish	Matte Embossed
Installation Method & Adhesives	FLOOR+ F2000 F. BALL F44 F. BALL F58 F. BALL F49 PLUS (for areas with direct sunlight or higher temperature fluctuations) Refer to installation guidelines for further detail
Surface Coat	UV Lacquer (with anti-stain coat)
Box Weight	20.55kg
Profile	Micro Bevel



Pattern Repeat

18 Unique Planks

Note: We use a pattern shifting design approach, where each plank will feature a 50% unique print (half of the plank), therefore allowing for 18 unique planks with at least 50% variance on each plank.

Part 3 : Warranty

General Residential	20	Years
Light Commercial	5	Years



Part 4: Wet Pendulum Slip Test (AS 4586-2013)

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 24-001554
Issue Date : 8/05/2024
Print Date : 8/05/2024

AS 4586-2013
Appendix A

Slip Resistance Classification of new Pedestrian Surface Materials

Wet Pendulum Test Method

Date of Testing

Operator

Test Temperature (20±5degC)

Specimens washed with pH neutral detergent then dried

Test Direction

Fixed/Unfixed

Slider No 96 Batch No

Length

British Pendulum number

Classification

08-05-2024

AWTA Test Operator 14

20 °C

Length

Unfixed

23

12345SRV

353329323132

P2

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023

Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions , including maintenance and wear on their slip resistance be checked.



Part 5: Fire Test (AS ISO 9239.1-2003)

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 24-001555
Issue Date : 23/05/2024
Print Date : 23/05/2024

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival	03-05-2024			
Date Tested	23-05-2024			
CHF Value	1	2	3	Mean
Length	10.2	10.2	10.2	10.2 kW/m²
Width	10.4	-	-	- kW/m²
Smoke Value	1	2	3	Mean
Length	67	82	72	74 %.min
Width	72	-	-	- %.min
Observation				
Blistering	Yes			

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Part 6: Acoustic Report (3MM Vinyl over EQ512 (5mm Rubber Underlay)

System Tested	L'_{nTw} ³	FIIC ^{4, 5}	AAAC ⁶
Bare Concrete Floor (ECFS only) - for comparison purposes only	54	50	3
Marvel 3mm Vinyl over EQ512 - 5mm Rubber Underlay	40	67	6

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS



Date of Test : Thursday, 11 December 2025
Project No. : 3523
Testing Company : Koikas Acoustics
Checked by : James Tsevrementzis
Place of Test: Residential Unit in Forest Lodge (Living/Dining)
Client : Everfloor
Client Address : -


Description of Floor System	Name	Thickness (mm)	Density (Sf)
Vinyl Flooring	Everquiet EQ512	3	--
Rubber Underlay		5	--
Concrete Sub Base		--	--
Suspended Plasterboard Ceiling		--	--

Room Dimensions	Width :	4.4	m
	Length :	8.2	m
	Area :	36.08	m ²

Sample Dimensions	Width :	1	m
	Length :	1	m
	Area :	1	m ²

Location							Room Surfaces		
Receiver Rm	Unit below (Living/Dining)	Width	Length	Area	Height	Volume	Walls	Floor	Ceiling
		4.4	8.2	36.08	2.7	97.42	Plasterboard	Carpet	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	53.7	NA	53.3
63	54.5	NA	56.3
80	53.1	NA	55.0
100	49.7	NA	51.5
125	54.1	NA	53.0
160	49.0	NA	47.0
200	47.2	NA	45.7
250	44.8	NA	43.1
315	45.4	NA	41.1
400	43.6	NA	38.1
500	46.9	NA	39.8
630	43.5	NA	32.2
800	42.9	NA	22.5
1 000	46.5	NA	16.8
1 250	43.8	NA	17.1
1 600	43.2	NA	17.4
2 000	47.4	NA	17.3
2 500	49.9	NA	16.9
3 150	49.1	NA	15.6
4 000	46.3	NA	14.9
5 000	43.3	NA	14.4

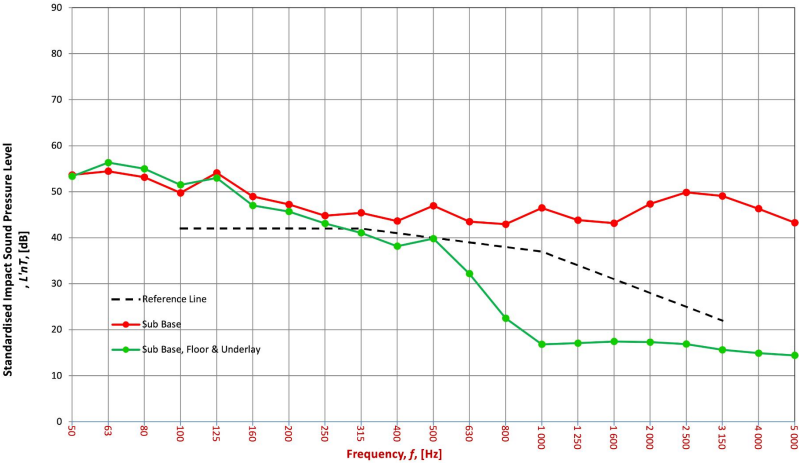

Sub Base		
L'nT,w	54	AS ISO 717.2 - 2004
Ci	-9	AS ISO 717.2 - 2004
Ci(50-2500)	-7	AS ISO 717.2 - 2004
Ci(63-2000)	-8	AS ISO 717.2 - 2004
AAAC★	3 Star	AAAC Guideline
FIIC	50	ASTM E1007-14

Sub Base & Floor		
L'nT,w	NA	AS ISO 717.2 - 2004
Ci	NA	AS ISO 717.2 - 2004
Ci(50-2500)	NA	AS ISO 717.2 - 2004
Ci(63-2000)	NA	AS ISO 717.2 - 2004
AAAC★	NA	AAAC Guideline
FIIC	NA	ASTM E1007-14

Sub Base, Floor & Underlay		
L'nT,w	40	AS ISO 717.2 - 2004
Ci	2	AS ISO 717.2 - 2004
Ci(50-2500)	7	AS ISO 717.2 - 2004
Ci(63-2000)	6	AS ISO 717.2 - 2004
AAAC★	6 Star	AAAC Guideline
FIIC	67	ASTM E1007-14

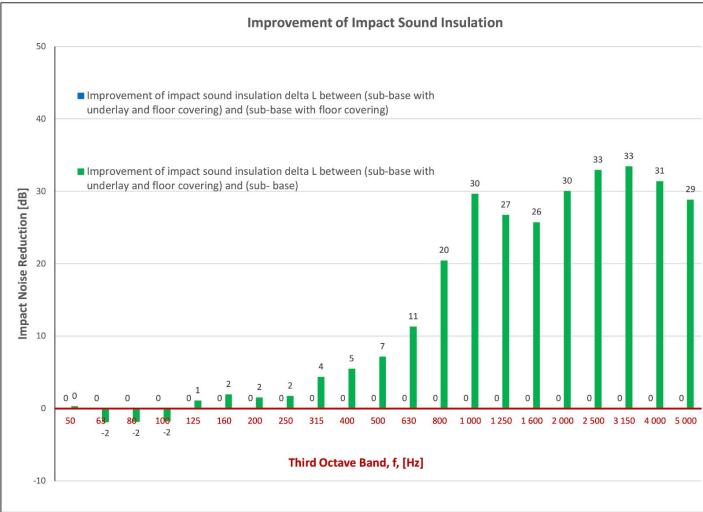

Definitions of Noise Metrics

FIIC:
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m² as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

Ci:
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors Ci is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

Ci(50-2500):
Same as above, but for the frequency range 50 -2500 Hz.

Ci(125-2000):
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Audible	Normally Inaudible