

RES60 Chassis Mounted Filter


Multi-Stage High Differential and High Common Mode

The RES60 series is a multi-stage EMC filter offering high differential and high common mode attenuation, and designed for quick and easy chassis mounting.

These general purpose filters are suitable for a broad range of applications including noisy environments where increased filter performance is required.



**Temperature Derating Curve for EMC Filters
Rated at 40°C Ambient and 100°C Maximum**

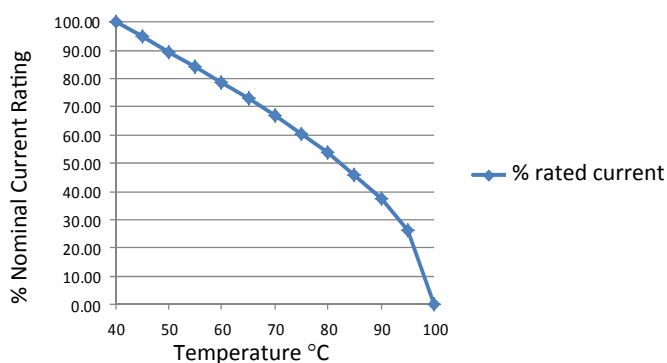

Call us on:

+44 (0) 1724 273200

Features:

- Multi-stage
- High differential and high common mode attenuation
- UL approved E191581
- For use from DC to 400Hz
- 1 Amp to 30 Amp

Benefits:

- Compact size for rated current
- Fast-on, screw or wire terminations
- Quick and easy mounting
- Available from UK stock

Application Examples:

- Lighting
- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Building automation
- Machinery
- Electronic data/communication processing equipment
- Office automation

Full technical specification on page 2

Performance curves on page 3

Other options in this range on page 4

DEM Manufacturing

Deltron Emcon House
Hargreaves Way
Sawcliffe Industrial Park
Scunthorpe, North Lincolnshire.
DN15 8RF



ROXBURGH *EMC*



Tel: +44 (0) 1724 273200

Email: sales@dem-uk.com


Web: www.dem-uk.com/roxburgh

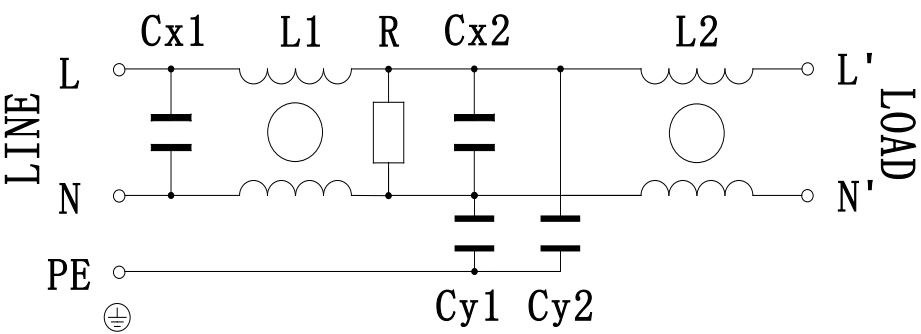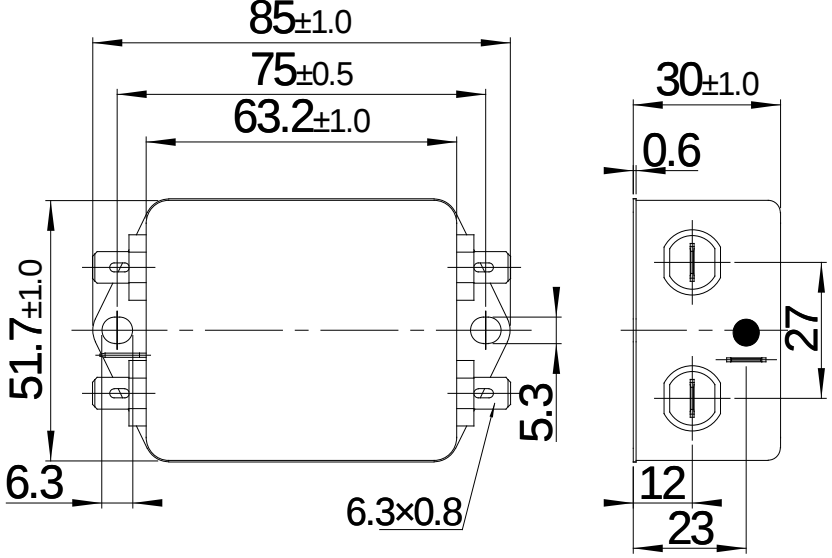Circuit diagram:		Dimensions(mm):						
								
Electrical parameters:		Filter parameters:						
Rated Voltage:	120/250VAC	Total Inductance(L-L'/N-N'):		1.6mH +50%,-35%				
Rated Current at an ambient temp:	10A@40°C	Total Capacitance(L-N/L'-N'):		0.94uF +/-20%				
Operating Frequency:	50/60Hz	Total Capacitance(L/N-PE) (RES60F10-M):		9.4nF +/-20% (0nF)				
Climatic Class(IEC60068-1):	25/100/21	Total Resistance(L-N/L'-N'):		470KΩ +/-10%				
Operational Leakage current: (at 250VAC/50Hz and Total C +/-20%)	0.8mA max (RES60F10-M 0mA)	Weight(Approximate):		155g				
Operational Leakage current: (at 120VAC/60Hz and Total C +/-20%)	0.46mA max (RES60F10-M 0mA)	Safety certification			Technical Specification			
Test Voltage(100%)for 2 sec: L-N: L/N-PE:		UL	☒	CSA	☒	compiled by	Jay Zhang	2020-8-5
	1100VDC/20mA	ENEC	☒	CQC	☐	reviewed by	Pallas Wang	2020-8-5
	2250VDC/20mA	CE	☒	VDE	☐	approved by	Henry Huang	2020-8-5
 +44 (0)1724 273200 sales@dem-uk.com www.dem-uk.com/roxburgh		Part RES60F10				single-phase emc filter		
		Number (Alternate RES60F10-M - no Y caps)				stage marker	V1.03	


ROXBURGH EMC

FILTER INSERTION LOSS CHARACTERISTICS CISPR 17 - 50 OHM METHOD

RES60F10

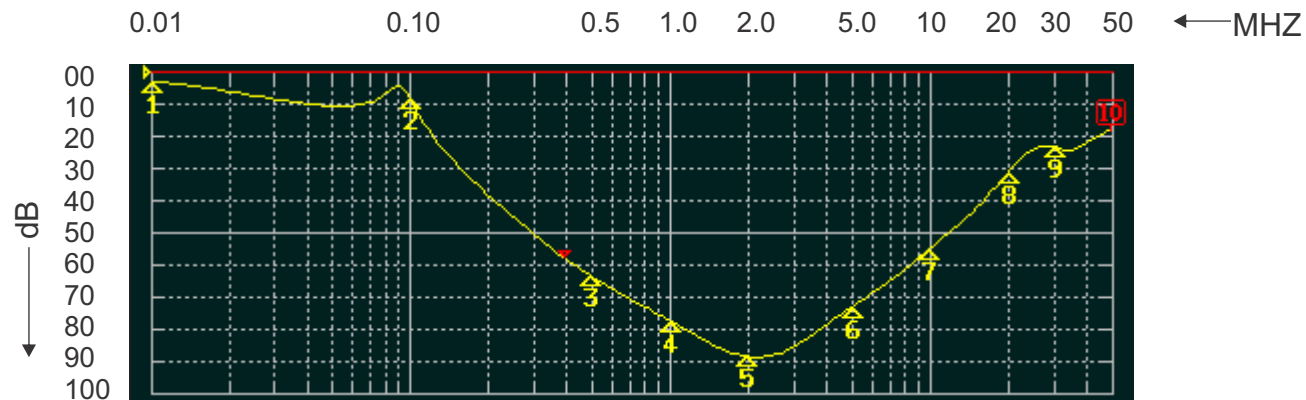

COMMON MODE

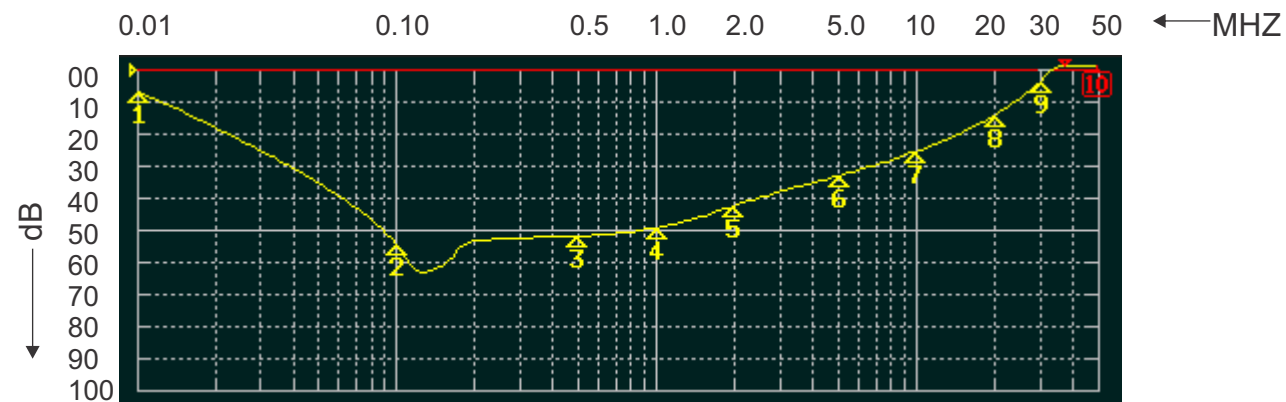

DIFFERENTIAL MODE



RES60 Chassis Mounted Filter

Multi-Stage High Differential and High Common Mode

Options available:

Part Number	Rated Current @40°C A	Leakage Current @ 230V/50Hz mA	Inductance ΣL mH	Capacitance ΣCx uF	Capacitance ΣCy nF	Resistance ΣR K Ω	Connection Type		
									
RES60F01	1	0.74	24	0.44	9.4	1000	F	W	
RES60F03	3	0.74	5	0.44	9.4	1000	F	W	
RES60F06	6	0.74	1.94	0.44	9.4	1000	F	W	
RES60F10	10	0.74	1.6	0.94	9.4	470	F	W	
RES60F12	12	0.74	1.16	0.94	9.4	470	F	W	
RES60F16	16	0.74	1.3	0.66	9.4	1000	F	W	S
RES60F20	20	0.74	1.2	2.0	9.4	220	F	W	
RES60S20	20	0.74	1.2	2.0	9.4	220		W	S
RES60S30	30	0.87	1.2	2.0	20	220			S

Call us on:

+44 (0) 1724 273200



DEM Manufacturing

Deltron Emcon House, Hargreaves Way, Sawcliffe Industrial Park,
Scunthorpe, North Lincolnshire, DN15 8RF

Tel: +44 (0) 1724 273200

Email: sales@dem-uk.com

Web: www.dem-uk.com/roxburgh