



Product Summary

Part 1 : Dimensions

Width	Aus Timber Designs: 182 Oak Designs: 228	mm
Length	1524	mm
Total Thickness	5	mm
Wear Layer	0.7	mm
Boards Per Box	6	planks
Box Size	Aus Timber Designs: 1.664 Oak Designs: 2.084	sqm

Part 2 : General Data

Core Type	PVC Vinyl with Fibre-Glass Mesh
Wear Layer	0.7mm
Finish	Matte Light Embossed
Installation Method & Adhesives	Full trowel installation (refer to installation guidelines) F. BALL F44 Styccobond Adhesive F. BALL F58 Styccobond Adhesive F. BALL F48 PLUS - High Temperature (for areas of high temperature variation and areas with exposure to sunlight) FLOOR+ F2000 Vinyl & Resilient Adhesive
Surface Coat	UV-cured Lacquer (with anti-stain coat)
Box Weight	182mm Wide Planks: 16.1KG 228mm Wide Planks: 20.1KG
Profile	Micro Bevel



Pattern Repeat

12 - 15 Pure Unique
72 - 90 Unique Prints (with pattern shifts down the plank)
Note: This is approximately triple the standard unique prints available on a vinyl floor, showcasing greater print and colour variations.

Part 3 : Warranty

General Residential	25	Years
Commercial	By Application	Years



Part 4: Wet Pendulum Slip Test (AS 4586-2013)

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-000866
Issue Date : 2/04/2025
Print Date : 2/04/2025

AS 4586-2013 Appendix A

Slip Resistance Classification of new Pedestrian Surface Materials Wet Pendulum Test Method

Date of Testing 01-04-2025
Operator AWTA Test Operator 14
Test Temperature (20±5degC) 25 °C
Specimens Washed with pH Neutral Detergent then dried
Test Direction Length
Fixed/Unfixed Unfixed
Slider No 96 Batch No 33
Length 1 2 3 4 5 SRV
British Pendulum 34 35 38 37 38 36
number
Classification P3

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023
Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.

346424

75952

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



0204/11/06

Fiona McDonald
APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc (Hons)
MANAGING DIRECTOR



Part 5: Fire Test (AS ISO 9239.1-2003)

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 25-004545
Issue Date : 25/11/2025
Print Date : 4/12/2025

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 21-10-2025

Date Tested 25-11-2025

CHF Value	1	2	3	Mean
Length	9.6	9.5	9.5	9.5 kW/m ²
Width	9.9	-	-	- kW/m ²

Smoke Value	1	2	3	Mean
Length	131	165	141	146 %.min
Width	142	-	-	- %.min

Observations:

Melting	Yes
Blistering	Yes

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

366336

80275

Page 2 of 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald

Fiona McDonald

APPROVED SIGNATORY


Michael A. Jackson
MICHAEL A. JACKSON B.Sc (Hons)
MANAGING DIRECTOR

0204/11/06



Part 6: Acoustic Test (Marvel 5mm Vinyl Direct on Concrete)

System Tested	L' nTw ³	FIIC ^{4, 5}	AAAC ⁶
Bare Concrete Floor (ECFS only) - for comparison purposes only	55	49	3
Marvel 5mm Vinyl	50	55	4

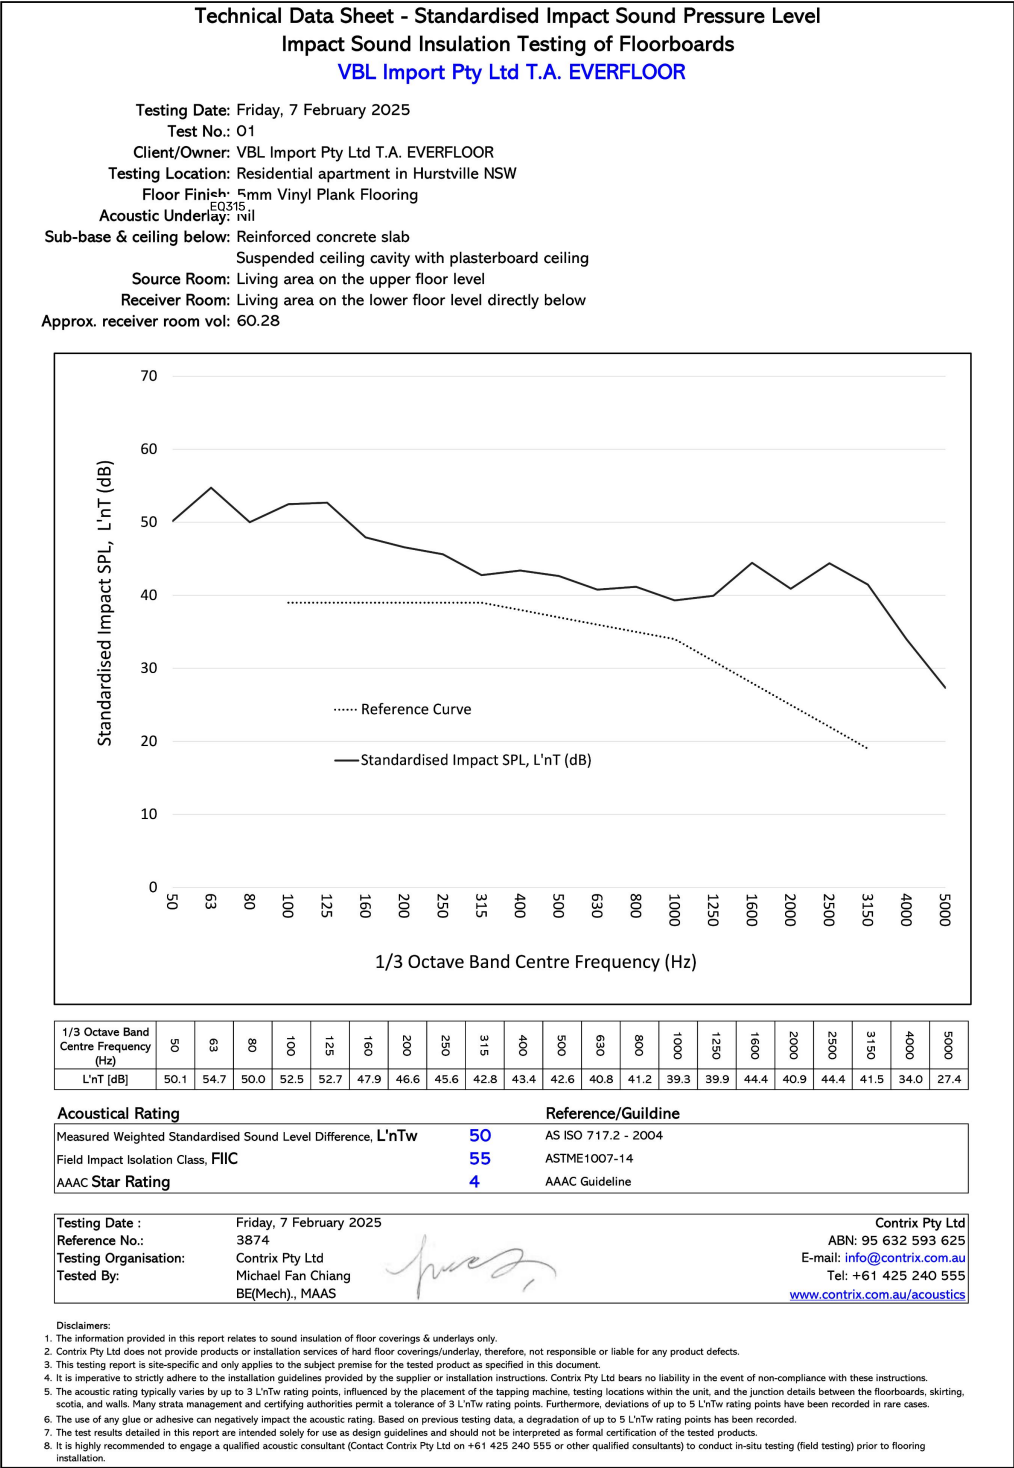

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2-2004.

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025



Part 6: Acoustic Test (5MM Vinyl over EQ512 - 5MM Rubber Underlay)

System Tested	L'_{nTw} ³	FIIC ^{4,5}	AAAC ⁶
Bare Concrete Floor (ECFS only) - for comparison purposes only	54	50	3
Marvel 5mm Vinyl over EQ512 - 5mm Rubber Underlay	39	69	6

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

Date of Test : Thursday, 11 December 2025
Project No. : 3523
Testing Company : Koikas Acoustics
Checked by : James Tsevermentzis
Place of Test : Residential Unit in Forest Lodge (Living/Dining)
Client : Everfloor
Client Address : -

Description of Floor System	Name	Thickness (mm)	Density (SI)
Vinyl Flooring	Vinyl Flooring	5	-
Everquiet EQ512 Rubber Underlay	Everquiet EQ512 Rubber Underlay	3	--
Concrete Sub Base	Concrete Sub Base	--	--
Suspended Plasterboard Ceiling	Suspended Plasterboard Ceiling	--	--


Room Width : 4.4 m
Floor Length : 8.2 m
Dimensions Area : 36.08 m²

Sample Width : 1 m
Dimensions Length : 1 m
Area : 1 m²

Receiver Rm	Location	Width	Length	Area	Height	Volume
Unit below (Living/Dining)	Unit below (Living/Dining)	4.4	8.2	36.08	2.7	97.42

Room Surfaces
Walls Plasterboard
Floor Carpet
Ceiling Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	53.7	NA	54.5
63	54.5	NA	55.9
80	53.1	NA	52.1
100	49.7	NA	49.3
125	54.1	NA	50.8
160	49.0	NA	47.9
200	47.2	NA	44.7
250	44.8	NA	40.9
315	45.4	NA	37.9
400	43.6	NA	36.4
500	46.9	NA	40.0
630	43.5	NA	32.9
800	42.9	NA	25.9
1 000	46.5	NA	21.5
1 250	43.8	NA	17.9
1 600	43.2	NA	20.2
2 000	47.4	NA	21.9
2 500	49.9	NA	19.4
3 150	49.1	NA	19.1
4 000	46.3	NA	17.1
5 000	43.3	NA	16.3

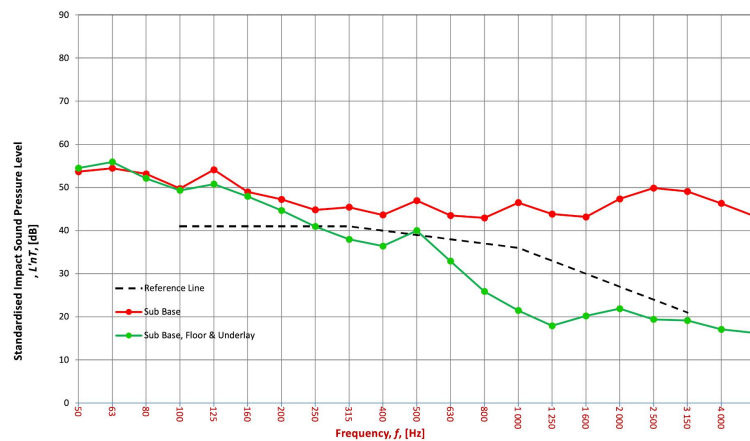

Sub Base	
L'nT,w	54
CI	-9
CI(50-2500)	-7
CI(63-2000)	-8
AAAC★	3 Star
FIIC	50
AS ISO 717.2 - 2004	
AAAC Guideline	
ASTM E1007-14	

Sub Base & Floor	
L'nT,w	NA
CI	NA
CI(50-2500)	NA
CI(63-2000)	NA
AAAC★	NA
FIIC	NA
AS ISO 717.2 - 2004	
AAAC Guideline	
ASTM E1007-14	

Sub Base, Floor & Underlay	
L'nT,w	39
CI	1
CI(50-2500)	7
CI(63-2000)	5
AAAC★	6 Star
FIIC	69
AS ISO 717.2 - 2004	
AAAC Guideline	
ASTM E1007-14	

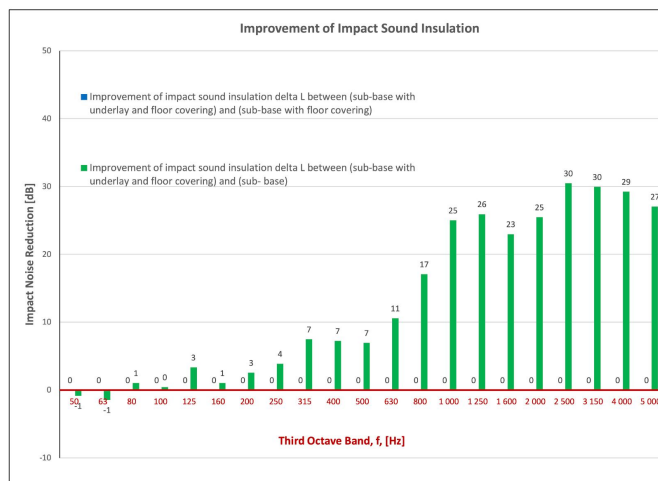

Definitions of Noise Metrics

FIIC:

Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m² as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:

The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

CI:

Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100 - and 2500 Hz.

CI(50-2500):

Same as above, but for the frequency range 50 - 2500 Hz.

CI(125-2000):

Same as above, but for the frequency range 125 - 2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA E2	Clearly Audible	Audible	Barely Audible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building. Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2:2004.

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025



Part 6: Acoustic Test (5MM Vinyl over EQ312 - 3MM Rubber Underlay)

System Tested	L'_{nTw} ³	FIIC ^{4,5}	AAAC ⁶
Bare Concrete Floor (ECFS only) - for comparison purposes only	54	50	3
Marvel 5mm Vinyl over EQ312 - 3mm Rubber Underlay	39	69	6

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

Date of Test : Thursday, 11 December 2025
Project No. : 3523
Testing Company : Koikas Acoustics
Checked by : James Tsevermentzis
Place of Test : Residential Unit in Forest Lodge (Living/Dining)
Client : Everfloor
Client Address : -


Description of Floor System	Name	Thickness (mm)	Density (SI)
Vinyl Flooring	Vinyl Flooring	5	-
Everquiet EQ312 Rubber Underlay	Everquiet EQ312 Rubber Underlay	3	--
Concrete Sub Base	Concrete Sub Base	--	--
Suspended Plasterboard Ceiling	Suspended Plasterboard Ceiling	--	--

Room Width : 4.4 m
Floor Length : 8.2 m
Dimensions Area : 36.08 m²

Sample Width : 1 m
Dimensions Length : 1 m
Area : 1 m²

Receiver Rm	Location	Width	Length	Area	Height	Volume	Room Surfaces		
							Walls	Floor	Ceiling
Unit below (Living/Dining)	Unit below (Living/Dining)	4.4	8.2	36.08	2.7	97.42	Plasterboard	Carpet	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB			
	Sub Base	Sub Base Floor	Sub Base Floor Underlay	
50	53.7	NA	54.5	
63	54.5	NA	55.9	
80	53.1	NA	52.1	
100	49.7	NA	49.3	
125	54.1	NA	50.8	
160	49.0	NA	47.9	
200	47.2	NA	44.7	
250	44.8	NA	40.9	
315	45.4	NA	37.9	
400	43.6	NA	36.4	
500	46.9	NA	40.0	
630	43.5	NA	32.9	
800	42.9	NA	25.9	
1 000	46.5	NA	21.5	
1 250	43.8	NA	17.9	
1 600	43.2	NA	20.2	
2 000	47.4	NA	21.9	
2 500	49.9	NA	19.4	
3 150	49.1	NA	19.1	
4 000	46.3	NA	17.1	
5 000	43.3	NA	16.3	

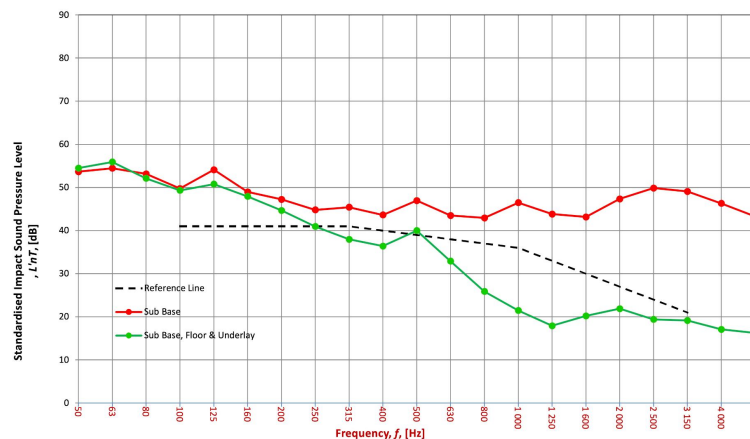

Sub Base	
L'nT,w	54
CI	-9
CI(50-2500)	-7
CI(63-2000)	-8
AAAC★	3 Star
FIIC	50
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AAAC Guideline
	ASTM E1007-14

Sub Base & Floor	
L'nT,w	NA
CI	NA
CI(50-2500)	NA
CI(63-2000)	NA
AAAC★	NA
FIIC	NA
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AAAC Guideline
	ASTM E1007-14

Sub Base, Floor & Underlay	
L'nT,w	39
CI	1
CI(50-2500)	7
CI(63-2000)	5
AAAC★	6 Star
FIIC	69
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AS ISO 717.2 - 2004
	AAAC Guideline
	ASTM E1007-14

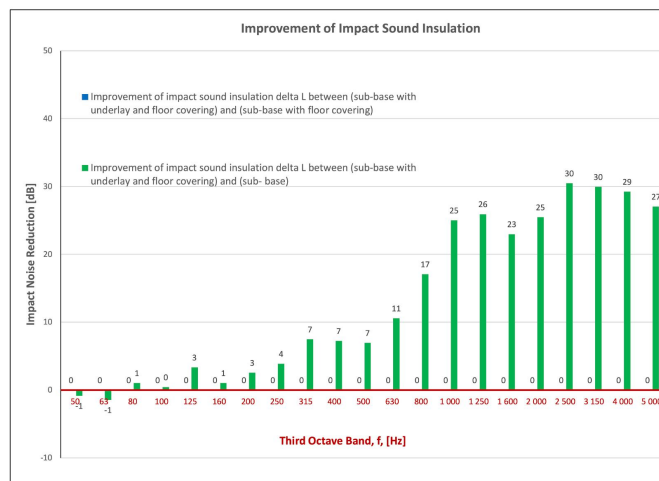

Definitions of Noise Metrics

FIIC:

Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m² as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:

The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

CI:

Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors CI is positive because of the low resonant frequencies. Considers frequency range between 100 - and 2500 Hz.

CI(50-2500):

Same as above, but for the frequency range 50 - 2500 Hz.

CI(125-2000):

Same as above, but for the frequency range 125 - 2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Audible	Normally Inaudible

Acoustic test results provided are only indicative of acoustic performance and are site specific, so outcomes may vary from building to building.

Everfloor provides this information for guidance and indicative purposes only and does not guarantee any specific acoustic outcome. Indicative testing has been completed by acoustic engineers according to AS/NZS ISO 140.7:2006 and the rating has been determined as per AS ISO 717.2:2004.

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines.

All technical data and testing are based on random sampling and are for indicative purposes only. Version: August 2025