

DOL 26 and iDOL 26 Capacitive Sensors




1 Product description

DOL 26 / iDOL 26 is a capacitive sensor for detection of loose and solid materials.


SCR output versions are available in 2-wire versions. PNP and NPN output versions are available in 4-wire versions.

The products are suitable together with contactors, relays, PLC's and similar within the agricultural and industrial sector. DOL 26 / iDOL 26 is immune to EMI, short-circuits and any overload. The mechanical design makes DOL 26 / iDOL 26 ideal for integration into applications with limited space. The full-return cable option is especially suitable for feeding pans. Very low current consumption in off state – enables possibility for sensors working in parallel on the same contactor. Unique possibility for controlling cross auger systems.


2 Mounting guide

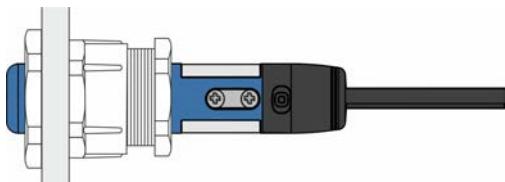

Smooth version mounted within a PG 21 gland

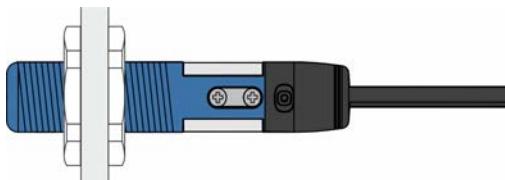

Threaded version mounted with M18 nuts

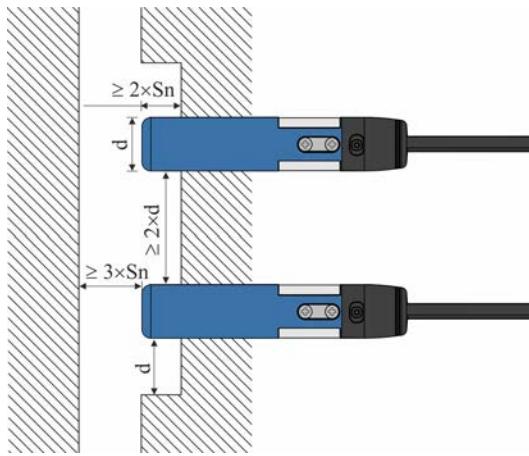


Mounting restrictions for non-flush (side sensitive version)

3 Installation guide



Installation, servicing and troubleshooting of all electrical equipment must be carried out by qualified personnel in compliance with the applicable national and international standard EN 60204-1 and any other EU standards that are applicable in Europe.

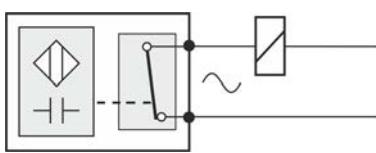


(i)DOL 26 SCR

(i)DOL 26 SCR:

Connect the sensor in series with the load. The polarity is unimportant.


The sensor is protected against overload and short-circuit. If the output current exceeds the nominal output current, the output function is switched off. Remove the short-circuit or choose a smaller load to remove the error. The current limitation error is indicated on the sensor by double flashes followed by a pause.

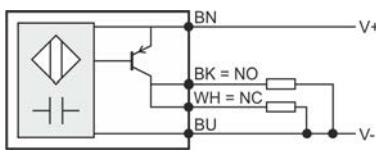

(i)DOL 26 PNP

(i)DOL 26 PNP/NPN:

Connect the sensor to a DC supply and connect the loads between the outputs and V- for the PNP version and V+ for the NPN version.

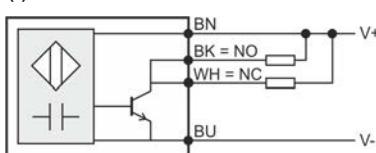

(i)DOL 26 NPN

The sensor is protected against polarity errors, and the outputs are protected against overload and short-circuit. If the output current exceeds the nominal output current, the output function is switched off. Remove the short-circuit or choose a smaller load to remove the error. The current limitation error is indicated on the sensor by double flashes followed by a pause.

LED indication	DOL 26 SCR / iDOL 26 SCR status	DOL 26 PNP/NPN / iDOL 26 PNP/NPN STATUS
RED OFF		Sensor output is OFF
RED slow flashing		Sensor delay is active
RED double flashing		Sensor load error (overcurrent protection is active) MaxRunTimer is active (optional)
RED ON		Sensor output is ON
GREEN OFF	-	No power to sensor
GREEN ON	-	Power to sensor

Adjustment

DOL 26 is available with different functions whereas iDOL 26 has all functions.

DOL 26 has trimmers with different functions depending on its type.

iDOL 26 settings can be adjusted with the SmartAdjust app.

4 Technical data

		DOL 26 SCR / iDOL 26 SCR	DOL 26 PNP/NPN / iDOL 26 PNP/NPN
Electrical			
Supply voltage (Ue)	V AC/DC	20 - 280	-
	V DC	-	10 - 36
Frequency	Hz	47 - 63	
Max. ripple	%	-	10
Max. current	mA AC/DC	500	-
	mA DC	-	500
Inrush current	A	< 2,5A @ 30 ms	-
Direct connection to Ue (current >> 500 mA) without damage to the sensor	Number	>10	
Min. ON current	mA AC/DC RMS	< 10 (Ue = 20 - 90)	-
		< 6 (Ue = 90 - 280)	-
OFF current	mA AC/DC RMS	< 3 (Ue = 20 - 90)	-
		< 1 (Ue = 90 - 280)	-
Voltage drop, output ON	V AC/DC	< 6	-
	V DC	-	< 2.5
current consumption without load	mA DC	-	< 6
Specifications			
Detection speed	Hz	>15	>100
Time delay, start-up	ms	265	60
Time delay, ON*	ms-s	< 65 - 600	<10 - 600
Time delay, OFF* (adjustable)	s	0.1 - 600	
Activation distance (Sn)* (adjustable)	mm (inches)	0 - 12 (0 - 0.47)	
Safe activation distance	mm (inches)	4 - 10 (0.16 - 0.39)	

		DOL 26 SCR / iDOL 26 SCR	DOL 26 PNP/NPN / iDOL 26 PNP/NPN
Repeatability	%		5
Hysteresis	%		4 - 10
MaxRunTimer* (3 settings for DOL 26, stepless 1-7200 s for iDOL 26)	s		OFF / Period 1 / Period 2
Number of single turn 240° potentiometer (DOL 26)			0, 1 or 2
SmartAdjust (iDOL 26)		  	Activated NFC required
Number of outputs		1	1 or 2
Type of output		NO or NC	NO and NC
Indicator for power ON		-	Green LED
Indicator for sensor output state ON or Error			Red LED
Mechanical			
Sensor length	mm (inches)		89 (3 1/2)
Sensor diameter (d)	mm (inches)		18 (11/16)
Cable dimensions	mm ² (AWG)	2x0.5 (2xAWG20)	4x0.26 (4xAWG22)
Cable length	m(ft.)		2 (6.6)
Cable type			UL2517
Weight incl. cable	g (oz)		170 (6)
Environment			
Operating temperature	°C (°F)		-20 to +70 (-4 to +158)
Operating temperature, USA and Canada, Ie < 300mA	°C (°F)		-20 to +70 (-4 to +158)
Operating temperature, USA and Canada, Ie < 500mA	°C (°F)	-20 to +65 (-4 to +149)	-20 to +70 (-4 to +158)
Temperature, storage	°C (°F)		-40 to +80 (-40 to +176)
Protection class	IP		69k (DIN 40050-9)
	NEMA		1, 3, 4, 6, 12, 13
Approval			CE, UL, C-UL

*Option – can be changed / introduced upon request. See the current functions on the product label.

4.1 Dimensioned sketch

