



SK-F485C

Fiber to SBUS Converter

The SK-F485C offers a seamless conversion from panel SBUS connection to fiber and back again.

INSTALLATION

The SK-F485C can be mounted using the standoffs on the board in the cabinet of a compatible FACP. The 5815RMK remote mounting kit can also be used allowing up to two SK-F485C converter modules in a single cabinet.

COMPATIBILITY

The SK-F485C is compatible with the following Honeywell Silent Knight FACP's:

- 6820:** Addressable fire alarm control panel
- 6820EVS:** Addressable fire alarm control panel with an emergency mass notification system.
- 6808:** Addressable fire alarm control panel
- 6700:** Addressable fire alarm control panel
- 5700:** Addressable fire alarm control panel
- 5808:** Addressable fire alarm control panel
- 5820XL:** Addressable fire alarm control panel
- 5820XL-EVS:** Addressable fire alarm control panel with an emergency voice system.
- 5895XL:** Intelligent Power Module
- 5496:** Intelligent Power Module




SK-F485C


FEATURES & BENEFITS

- Fiber connection duplex ST connectors for Tx and Rx data fiber cable duplex is 62.5 micron. Multimode fiber data rate 115.2K bits/second
- Maximum attenuation 5.5db
- Fiber distance Up to 1.0 mile (1.6Km)
- SK-F485C connection (two-wire) or terminal strip, and jumper selectable bias / termination
- SK-F485C Data Direction Control
- Automatic half duplex transmitter enable control, for any baud rate / data bits

SK-F485C Technical Specifications

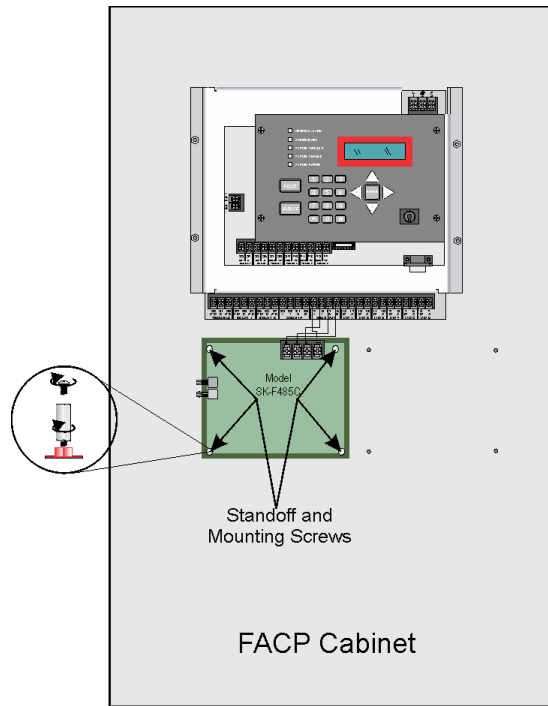

SK-F485C MOUNTING IN FACP CABINET

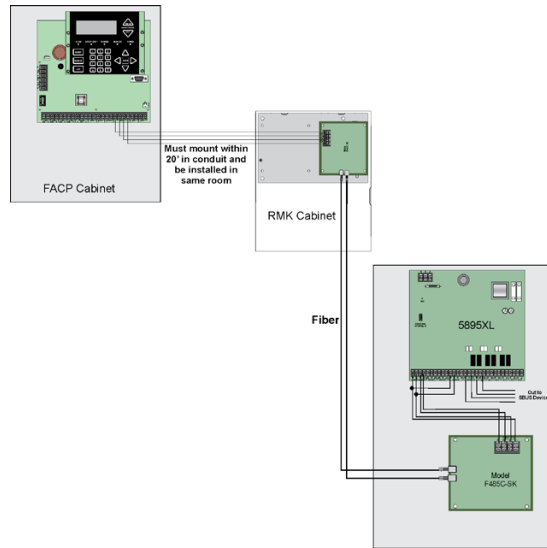

CONNECTING FIBER TO PANEL TO POWER SUPPLY

For a complete listing of all compliance approvals and certifications, please visit www.silentknight.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight® and Honeywell® are registered trademarks of Honeywell International, Inc

This document is not intended to be used for installation purposes. We try to keep our product information up-to date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

PHYSICAL

Dimensions: 4.75"W x 4.25"H x 1.0"D

ENVIRONMENTAL

Operating Temperature: 32°F-120°F (0°C -49°C)

Humidity: 10%-93% non-condensing

ELECTRICAL

External Power Supply: 9 - 35VDC @ 125mA max.

ORDERING INFORMATION

SK-F485C: Copper to Fiber Converter

ACCESSORIES

5815RMK: Remote Mounting Kit 10.2" H x 10.4" W x 3" D. Cabinet holds up to two SK-486C. Red

WIRING

Follow the table for wiring the SK-F485C to a compatible FACP.

SK-F485C TERMINALS	FACP SBUS OUT TERMINALS
+	+
-	-
A	A
B	B

For more information

Learn more about Honeywell Silent Knight and other products available by visiting www.silentknight.com

Honeywell Security & Fire

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350806-L8 | Rev C | 12/17
© 2017 Honeywell International Inc.

