Product Summary

Part 1 : Dimensions

Width	228	mm
Length	1524	mm
Total Thickness	3	mm
Wear Layer	0.5	mm
Boards Per Box	10	planks
Box Size	3.474	sqm

Part 2 : General Data

Core Type	PVC Vinyl
Wear Resistance	0.5mm
Finish	Matte Embossed
Installation Method & Adhesives	FLOOR+ F2000 F. BALL F44 F. BALL F58 F. BALL F49 PLUS (for areas with direct sunlight or higher temperature fluctuations) Refer to installation guidelines for further detail
Surface Coat	UV Lacquer (with anti-stain coat)
Box Weight	19.38kg
Profile	Micro Bevel

Pattern Repeat	12 Unique Planks ***Note:*** We use a pattern shifting design approach, where each of 4 unique faces will feature a 30% unique print, therefore allowing for 12 unique planks with variance on each plank.

Part 3 : Warranty

General Residential	25	Years
Light Commercial	5	Years

Part 4: Wet Pendulum Slip Test (AS 4586-2013)

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 24-001554
Issue Date : 8/05/2024
Print Date : 8/05/2024

AS 4586-2013 Appendix A

Slip Resistance Classification of new Pedestrian Surface Materials
Wet Pendulum Test Method

Date of Testing					08-05-2024		
Operator					AWTA Test Operator 14		
Test Temperature (20±5degC)					20	°C	
Specimens washed with pH neutral detergent then dried							
Test Direction					Length		
Fixed/Unfixed					Unfixed		
Slider No 96 Batch No					23		
Length	1	2	3	4	5		SRV
British Pendulum number	35	33	29	32	31		32
Classification					P2		

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 11/10/2023
Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.

Part 5: Fire Test (AS ISO 9239.1-2003)

TEST REPORT

Client : Everfloor
2A 87 Allingham Street
Condell Park NSW 2200

Test Number : 24-001555
Issue Date : 23/05/2024
Print Date : 23/05/2024

AS ISO 9239.1-2003 **Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source**

Date of Sample Arrival 03-05-2024

Date Tested 23-05-2024

CHF Value	1	2	3	Mean	
Length	10.2	10.2	10.2	10.2	kW/m²
Width	10.4	-	-	-	kW/m²

Smoke Value	1	2	3	Mean	
Length	67	82	72	74	%.min
Width	72	-	-	-	%.min

Observation	
Blistering	Yes

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Part 6: Acoustic Report (3MM Vinyl over EQ512 5mm Rubber Underlay)

System Tested	L'_{nTw} [3]	FIIC [4, 5]	AAAC [6]
Bare Concrete Floor (ECFS only) - for comparison purposes only	54	50	3
Grand Alpine Vinyl 3mm over EQ512 - 5mm Rubber Underlay	40	67	6

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

koikas acoustics PTY LTD — CONSULTANTS IN NOISE & VIBRATION

Date of Test :	Thursday, 11 December 2025
Project No. :	3523
Testing Company :	Koikas Acoustics
Checked by :	James Tsevrementzis
Place of Test:	Residential Unit in Forest Lodge (Living/Dining)
Client	Everfloor
Client Address	-


	Name	Thickness (mm	Density (Sl)
Description of Floor System	Vinyl Flooring	3	--
	Everquiet **EQ512**Rubber Underlay	5	--
	Concrete Sub Base	--	--
	Suspended Plasterboard Ceiling	--	--

Room Floor Dimensions	Width :	4.4	m
	Length :	8.2	m
	Area :	36.08	m^2
Sample Dimensions	Width :	1	m
	Length :	1	m
	Area :	1	m^2

	Location	Width	Length	Area	Height	Volume
Receiver Rm	Unit below (Living/Dining	4.4	8.2	36.08	2.7	97.42

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Carpet	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	53.7	NA	53.3
63	54.5	NA	56.3
80	53.1	NA	55.0
100	49.7	NA	51.5
125	54.1	NA	53.0
160	49.0	NA	47.0
200	47.2	NA	45.7
250	44.8	NA	43.1
315	45.4	NA	41.1
400	43.6	NA	38.1
500	46.9	NA	39.8
630	43.5	NA	32.2
800	42.9	NA	22.5
1 000	46.5	NA	16.8
1 250	43.8	NA	17.1
1 600	43.2	NA	17.4
2 000	47.4	NA	17.3
2 500	49.9	NA	16.9
3 150	49.1	NA	15.6
4 000	46.3	NA	14.9
5 000	43.3	NA	14.4

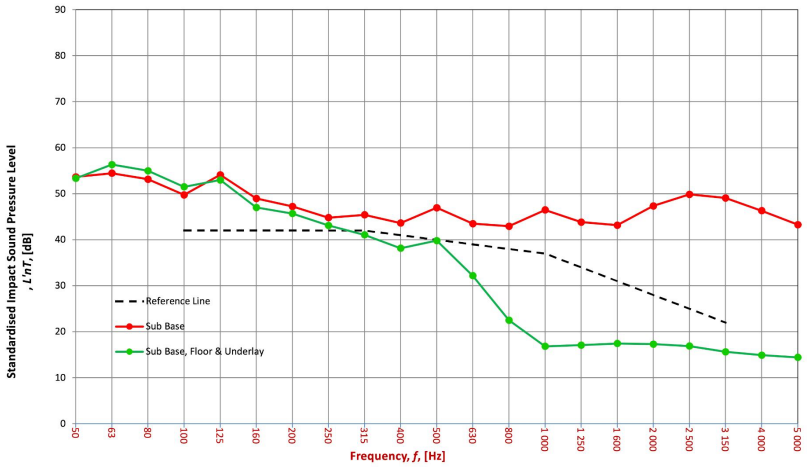

Sub Base		
L'nT,w	54	AS ISO 717.2 - 2004
Ci	-9	AS ISO 717.2 - 2004
Ci(50-2500)	-7	AS ISO 717.2 - 2004
Ci(63-2000)	-8	AS ISO 717.2 - 2004
AAAC★	3 Star	AAAC Guidleline
FIIC	50	ASTM E1007-14

Sub Base & Floor		
L'nT,w	NA	AS ISO 717.2 - 2004
Ci	NA	AS ISO 717.2 - 2004
Ci(50-2500)	NA	AS ISO 717.2 - 2004
Ci(63-2000)	NA	AS ISO 717.2 - 2004
AAAC★	NA	AAAC Guidleline
FIIC	NA	ASTM E1007-14

Sub Base, Floor & Underlay		
L'nT,w	40	AS ISO 717.2 - 2004
Ci	2	AS ISO 717.2 - 2004
Ci(50-2500)	7	AS ISO 717.2 - 2004
Ci(63-2000)	6	AS ISO 717.2 - 2004
AAAC★	6 Star	AAAC Guidleline
FIIC	67	ASTM E1007-14

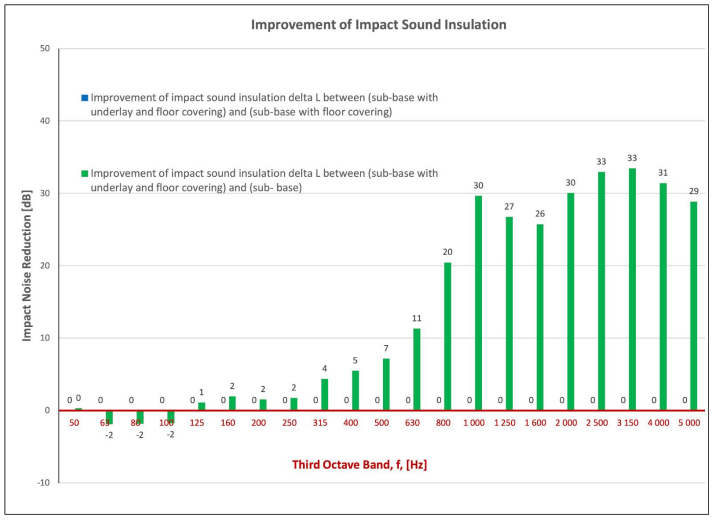

Definitions of Noise Metrics

FIIC:
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m^2 as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

Ci:
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors Ci is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

Ci(50-2500):
Same as above, but for the frequency range 50 -2500 Hz.

Ci(125-2000):
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Audible	Normally Inaudible

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only.
Version: August 2025

Part 6: Acoustic Report (3MM Vinyl over EQ512 3mm Rubber Underlay)

System Tested	L'_{nTw} [3]	FIIC [4, 5]	AAAC [6]
Bare Concrete Floor (ECFS only) - for comparison purposes only	54	50	3
Grand Alpine Vinyl 3mm over EQ512 - 5mm Rubber Underlay	42	66	5

FIELD MEASUREMENTS OF IMPACT SOUND INSULATION OF FLOORS

koikas acoustics PTY LTD — CONSULTANTS IN NOISE & VIBRATION

Date of Test :	Thursday, 11 December 2025
Project No. :	3523
Testing Company :	Koikas Acoustics
Checked by :	James Tsevrementzis
Place of Test:	Residential Unit in Forest Lodge (Living/Dining)
Client	Everfloor
Client Address	-


Description of Floor System	Name	Thickness (mm	Density (Sl)
	Vinyl	3	--
	Everquiet EQ312 Rubber Underlay	3	--
	Concrete Sub Base	--	--
	Suspended Plasterboard Ceiling	--	--

Room Floor Dimensions	Width :	4.4	m
	Length :	8.2	m
	Area :	36.08	m^2
Sample Dimensions	Width :	1	m
	Length :	1	m
	Area :	1	m^2

	Location	Width	Length	Area	Height	Volume
Receiver Rm	Unit below (Living/Dining	4.4	8.2	36.08	2.7	97.42

Room Surfaces		
Walls	Floor	Ceiling
Plasterboard	Carpet	Plasterboard


Frequency f Hz	L'nT (one-third octave) dB		
	Sub Base	Sub Base Floor	Sub Base Floor Underlay
50	53.7	NA	52.9
63	54.5	NA	54.5
80	53.1	NA	53.9
100	49.7	NA	51.5
125	54.1	NA	53.7
160	49.0	NA	48.7
200	47.2	NA	46.7
250	44.8	NA	43.4
315	45.4	NA	42.2
400	43.6	NA	41.3
500	46.9	NA	45.4
630	43.5	NA	39.9
800	42.9	NA	33.5
1 000	46.5	NA	30.1
1 250	43.8	NA	22.5
1 600	43.2	NA	19.2
2 000	47.4	NA	20.2
2 500	49.9	NA	19.0
3 150	49.1	NA	17.2
4 000	46.3	NA	16.5
5 000	43.3	NA	14.9

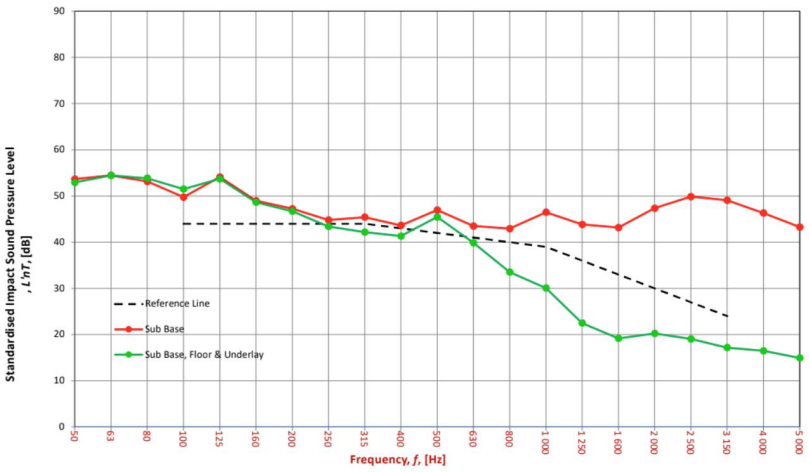

Sub Base		
L'nT,w	54	AS ISO 717.2 - 2004
Ci	-9	AS ISO 717.2 - 2004
Ci(50-2500)	-7	AS ISO 717.2 - 2004
Ci(63-2000)	-8	AS ISO 717.2 - 2004
AAAC★	3 Star	AAAC Guidleline
FIIC	50	ASTM E1007-14

Sub Base & Floor		
L'nT,w	NA	AS ISO 717.2 - 2004
Ci	NA	AS ISO 717.2 - 2004
Ci(50-2500)	NA	AS ISO 717.2 - 2004
Ci(63-2000)	NA	AS ISO 717.2 - 2004
AAAC★	NA	AAAC Guidleline
FIIC	NA	ASTM E1007-14

Sub Base, Floor & Underlay		
L'nT,w	42	AS ISO 717.2 - 2004
Ci	1	AS ISO 717.2 - 2004
Ci(50-2500)	4	AS ISO 717.2 - 2004
Ci(63-2000)	3	AS ISO 717.2 - 2004
AAAC★	5 Star	AAAC Guidleline
FIIC	66	ASTM E1007-14

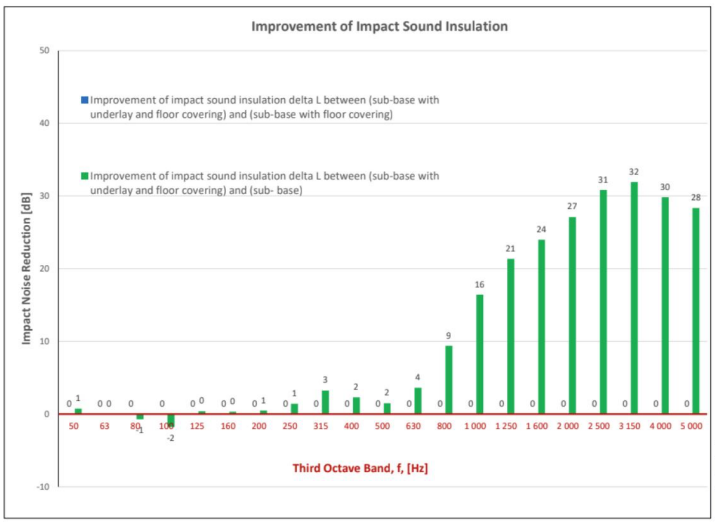

Definitions of Noise Metrics

FIIC:
Field Impact Insulation Class is a single-number rating of how well a floor system attenuates impact type sounds, such as footsteps. Calculated from third-octave band normalised impact sound pressure level data and referenced to 10 m^2 as described in ASTM E989. The higher the single-number rating, the better its impact insulation performance.

L'nT,w:
The Weighted Standardised Impact Sound Pressure Level when measured in situ referenced to a reverberation time (RT60) of 0.5 seconds. Used by the AAAC to determine their respective Star Rating.

Ci:
Spectrum adaption term is a low frequency correction factor. Typically for massive floors such as concrete, the values are about zero while for timber joist floors Ci is positive because of the low resonant frequencies. Considers frequency range between 100 -and 2500 Hz.

Ci(50-2500):
Same as above, but for the frequency range 50 -2500 Hz.

Ci(125-2000):
Same as above, but for the frequency range 125 -2000 Hz.

AAAC Star R.	2	3	4	5	6
L'nT,w	65	55	50	45	40
FIIC	45	55	60	65	70
Comments	Below BCA 62	Clearly Audible	Audible	Barely Audible	Normally Inaudible

Please visit everfloor.com.au for the most up-to-date version of Warranty, Installation, and care and maintenance guidelines. All technical data and testing are based on random sampling and are for indicative purposes only.
Version: August 2025