


AW-850 STR Cap Kit

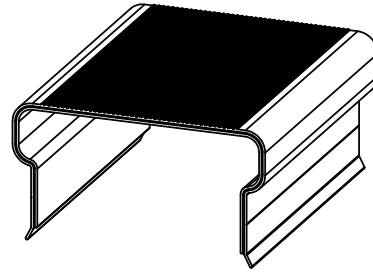

Allowable Moment (M)*	15,070 ft-lb	20.43 kN-m
Section Modulus (Z)	11.74 in ³	192 cm ³
Moment of Inertia (I)	60 in ⁴	2,493 cm ⁴
Outside Width	10.2 in	259 mm
Inside Width	8.25 in	210 mm
Material	6063-T6 Marine Grade Aluminum	
Sheet Piling Compatibility	SG-325, SG-425, FP-475, UC-30	
Recommended Accessories	Beveled PVC Washer, 45° and 90° AW-850/855 Corner Insert	
Standard Colors/Surface Treatment	Mill Finish, Anodized Marine Bronze	
Standard Packaging	20ft AW-850 Cap, SS and PVC Fasteners**, 20ft Structural Insert	

*based on a 15,400 psi allowable stress with cap securely fastened to prevent buckling

**3/8" x 2 1/2" bolts with washers and nuts

