

DYNALIFT 20LB



Li-Ion Reach Truck 2,000KG

- **48V/405Ah Li-ion battery and external charging plug for great convenience and adaptability.**
- **Enhanced mast with better visibility and safety.**
- **Hydraulic system with new components for better loads handling.**
- **Higher efficiency with a maximum reach distance of 610mm and lifting/lowering speeds of 0.55m/s and 0.5m/s.**

FEATURE



■ Lithium technology for great effectiveness

DYNALIFT20LB adopts 48V Li-ion battery as standard and it features zero battery maintenance and opportunity charging during breaks. This makes DYNALIFT20LB a flexible and cost-effective tool to store and retrieve pallets in multi working shifts. Plus, the charging port is external for easy charging and protected by a cover from water and dust ingress for charging safety.




■ Complete configurations for easy operation

DYNALIFT20LB is of tremendous help to the operator with full-color display, electric steering with damping, joystick system as well as proportional hydraulic system, which the operator can take advantage of to handle loads more easily and precisely.



■ Easy maintenance

The seat can be easily turned sideways, providing a quick access to internal components for daily maintenance and repair.

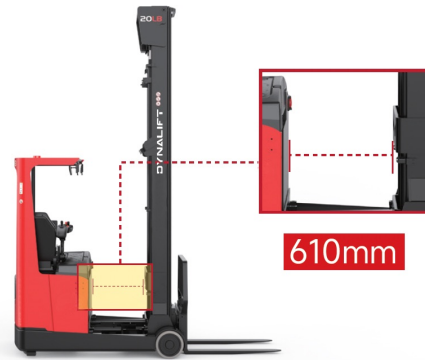

■ Improved performance for productivity boost

DYNALIFT20LB offers a greater reach distance of 610mm for effortless stacking and retrieving. The lifting and lowering speeds are also improved to reduce your cycle times and elevate your working efficiency.



■ Enhanced mast with better visibility and safety

DYNALIFT20LB's mast enables an unimpeded view of raised loads since the cylinders are moved to the side, and the enhanced mast is also vibration-free. This makes it ideal for safe operation at heights up to 12m, with nominal capacity performance up to 6.5m.



■ Spacious operation space


DYNALIFT20LB offers spacious legroom and a suspension seat to fulfill the ergonomic needs and ensure effective operation.


Li-ion Reach Truck 2000kg

DYNALIFT20LB

Distinguishing mark	1.1	Manufacturer			DYNALIFT
	1.2	Model designation			20LB
	1.3	Drive unit			Electric
	1.4	Operator type			Seated
	1.5	rated capacity	Q	kg	2000
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	399
	1.9	Wheelbase	y	mm	1515
	2.1	Service weight		kg	3940
Service weight	2.3.1	Axle loading, unladen front/rear		kg	2465/1490
	2.4.1	Axle loading, fork advanced, laden front/rear		kg	635/5340
	2.5.1	Axle loading, fork retracted, laden front/rear		kg	2165/3800
	3.1	Tyre type			Polyurethane
Tyres/chassis	3.2.1	Tyre size, front		mm	Φ343×140
	3.3.1	Tyre size, rear		mm	Φ310×118
	3.4	Additional wheels		mm	Φ102×51
	3.5.1	Wheels, number front/rear (x=drive wheels)		mm	1x/2
	3.6.1	Tread, front	b10	mm	-
	3.7.1	Tread, rear	b11	mm	1148
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	2/4
	4.2	Height, mast lowered	h1	mm	3935
	4.3	Free lift	h2	mm	2870
	4.4	Lift height	h3	mm	9500
	4.5	Height, mast extended	h4	mm	10560
	4.7	Height of overhead/ guard cabin	h6	mm	2213
	4.8	Seat height/standing height	h7	mm	1076
	4.10	Height of wheel arms	h8	mm	333
	4.19	Overall length	l1	mm	2443
	4.20	Length to face of forks	l2	mm	1373
	4.21	Overall width	b1/b2	mm	1260/1270
	4.22	Fork dimensions	s/e/l	mm	40/120/1070
	4.23	A,B Fork carriage class/type A, B			2A
	4.24	Fork carriage width	b3	mm	990
	4.25	Distance between fork-arms	b5	mm	240/770
	4.26	Distance between wheel arms/loading surfaces	b4	mm	915
	4.28	Reach distance	l4	mm	610
	4.31	Ground clearance, laden, below mast	m1	mm	70
	4.32	Ground clearance, center of wheelbase	m2	mm	75
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2835
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	2885
	4.35	turning radius	Wa	mm	1770
Performance data	4.37	Length across wheel arms	l7	mm	1948
	5.1	Travel speed, laden/unladen		km/ h	9/9.5
	5.2	Lifting speed, laden/unladen		m/s	0.45/0.55
	5.3	Lowering speed, laden/unladen		m/s	0.5/0.45
	5.4	Reaching speed, laden /unladen		m/s	0.15/0.15
	5.8	Max. gradeability, laden/unladen		%	10/15
Electric-engine	5.10	Service brake			Electromagnetic
	5.11	Parking brake			Electromagnetic
	6.1	Drive motor rating S2 60 min		kW	7
	6.2	Lift motor rating at S3 15%		kW	20
	6.4	Battery voltage/nominal capacity		V/Ah	48/405
Addition data	6.5	Battery weight		kg	490
	8.1	Type of drive unit			AC
	10.5	Steering design			Electronic
	10.7	Sound pressure level at the driver's ear		dB(A)	70
	15.1	Charger output current		A	200

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

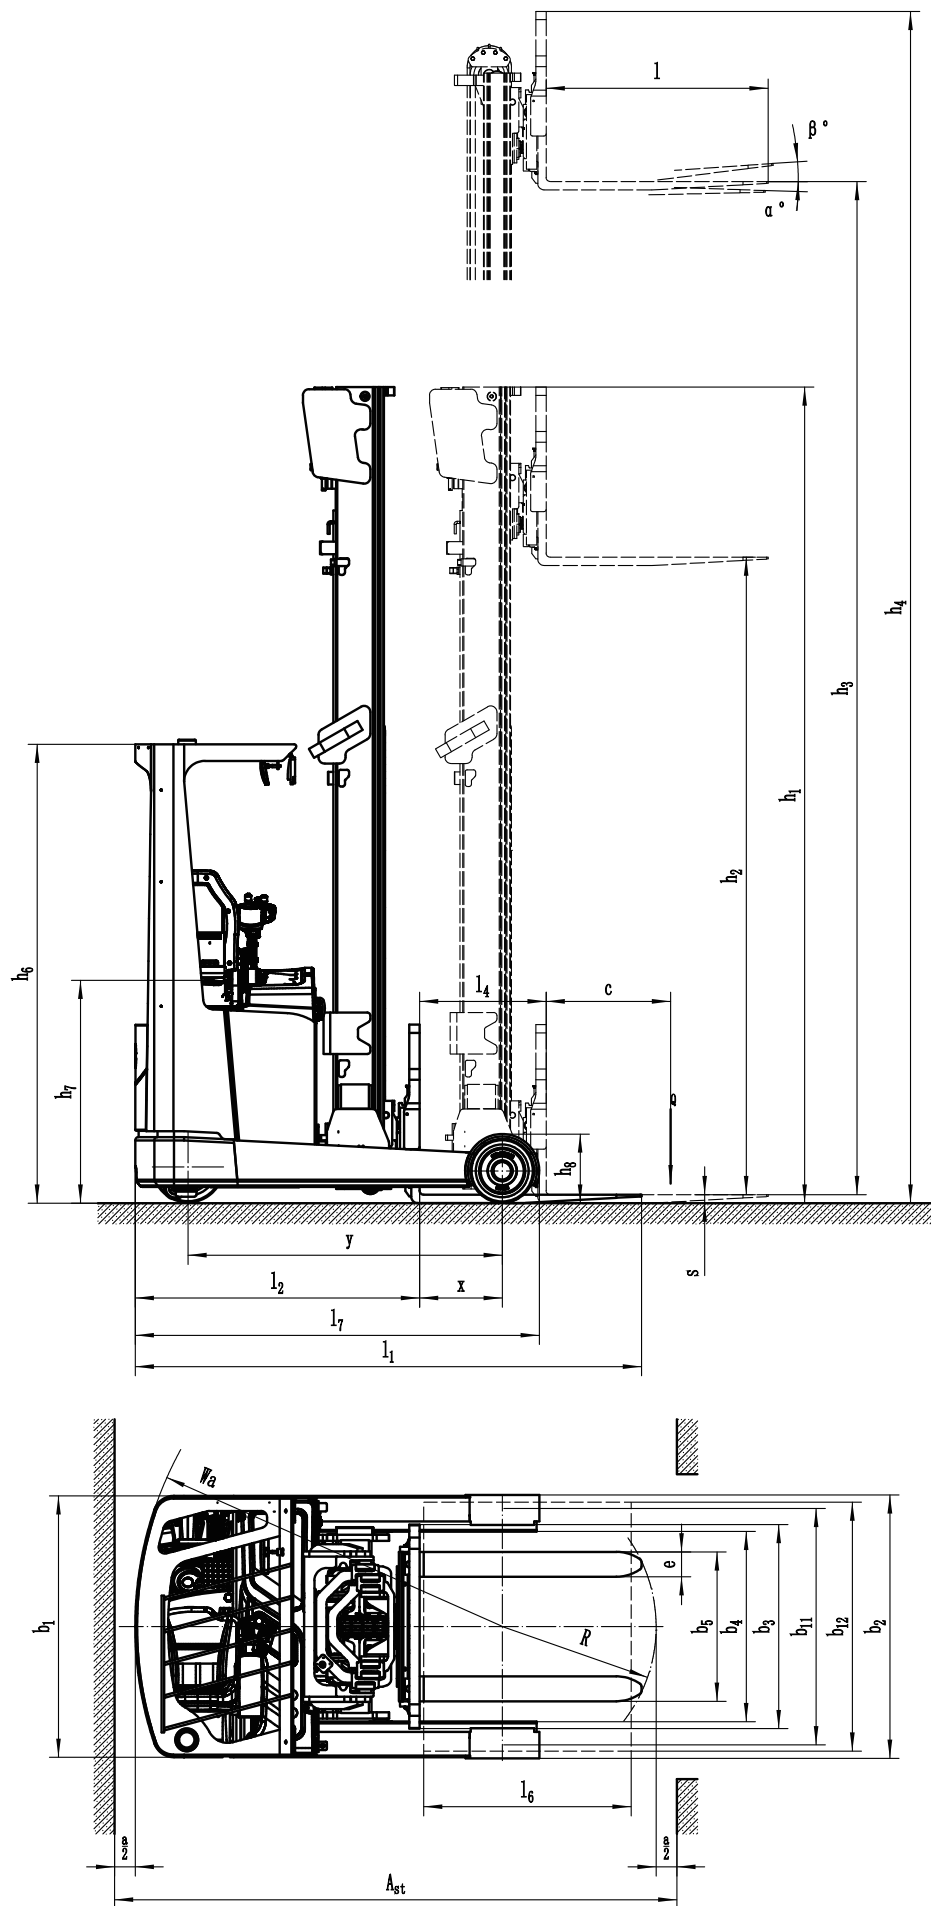

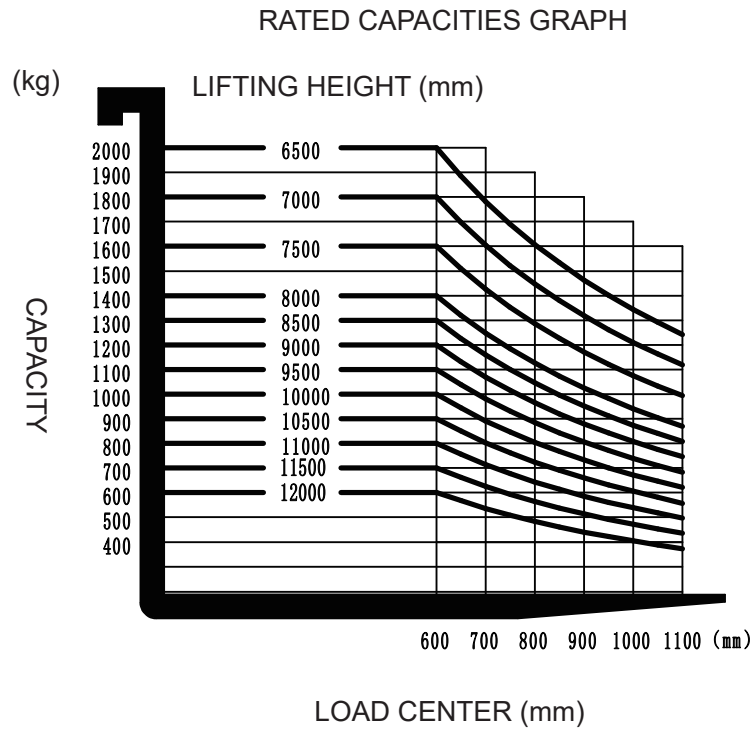

Mast Option

Mast types	Lift height (h3)	Height, Mast			Height, Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest
			No backrest	With backrest		
	mm	mm	mm	mm	mm	mm
3-Free Mast	4000	1965	4720	5060	1080	900
	4500	2135	5220	5560	1260	1070
	5000	2300	5720	6060	1420	1235
	5500	2465	6220	6560	1580	1400
	6000	2635	6720	7060	1760	1570
	6500	2800	7220	7560	1920	1735
	7000	3045	7720	8060	2160	1890
	7500	3215	8220	8560	2340	2150
	8000	3380	8720	9060	2500	2315
	8500	3600	9220	9560	2720	2535
	9000	3765	9720	10060	2880	2700
	6955	3430	7640	7980	2554	2370
	7255	3430	7940	8280	2554	2370
	7555	3430	8240	8580	2554	2370
	7955	3430	8640	8980	2554	2370
	8255	3430	8940	9280	2554	2370
	9655	3930	10340	10680	3054	2870
	10000	4159	10715	11065	3268	2568
	10500	4329	11215	11565	3428	2728
	11000	4489	11715	12065	3608	2908
	11500	4659	12215	12565	3768	3068
	12000	4819	12715	13065	3948	3248

Option

Optional items	DYNALIFT20LB
Fork dimension	○No○1000*600、2A、122*40*920●1000*600、2A、122*40*1070 ○1000*600、2A、122*40*1150○1000*600、2A、122*40*1220 ○1000*600、2A、122*40*1370○1000*600、2A、122*40*1500 ○1000*600、2A、122*40*1600
Reach lift truck Leg width	●917
Fork carriage width	●770mm
Load backrest height	●1020mm
Load wheel type	●Single
Load wheel material	●PU
Drive wheel material	●PU
Battery capacity	●405Ah (Li-ion)○No
Charger	●48V200A Li-ion External ○48V150A Li-ion External○No
Seat type	●Suspension + safety belt logic switch ○Suspension with armrest + safety belt logic switch
Attachments	●Built-in sideshifter
Electrostatic discharge chain	●No○Yes and not customized
Guard board	●Yes
Castor wheels	●Yes and not customized
Front lamp	●LED
Rear lamp	●No○LED
Warning lamp	●Yes and not customized
Blue lamp	●No○Yes and not customized
Area warning lamp	●No○Yes and not customized
Rearview mirror	●Yes and not customized
Buzzer	●No○Yes and not customized
Height display	●Yes and not customized
Camera	●No○Yes and not customized
Fire extinguisher holder	●No○Yes and not customized
OPS system	●Yes and not customized
Telematics	●No○Yes and not customized
Turn speed control	●Yes and not customized
Heating system for lithium battery charging	●No○Yes and not customized
Speed reduction with elevated mast	●Yes and not customized
Operator identification device	●No○Card reader○Fingerprint lock○Keypad with card reader
Cold storage	●No○Yes and not customized
Drive assembly	●ZK25
Forks tilt forward and backward	●Yes and not customized
Overhead guard	●Yes○Drive-in
Hydraulic lever system	●Joystick
Note: ●Standard ○ Optional - Inconformity	