# RUT951 POE+

INDUSTRIAL PoE+ CELLULAR ROUTER




Industrial & automation

Energy & utilities

Enterprise

Retail

Smart city

## CONNECTIVITY

4G LTE (Cat 4), 3G, 2G

## DUAL SIM & ESIM

With auto failover, backup WAN and other switching scenarios

## POE+

Total power budget of 90W

## WI-FI

Wireless Access Point with Hotspot functionality

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| Mobile | |
|---|---|
| Mobile module | 4G LTE Cat 4 up to 150 DL/50 UL Mbps; 3G up to 21 DL/5.76 UL Mbps; 2G up to 236.8 DL/236.8 UL kbps |
| 3GPP Release | Release 10/11 depending on the hardware version |
| SIM switch | 2 SIM cards, auto-switch cases: weak signal, data limit, SMS limit, roaming, no network, network denied, data connection fail, SIM idle protection |
| eSIM | Consumer type eSIM, profile download and removal operations, up to 7 eSIM profiles; does not include data plans |
| Status | IMSI, ICCID, operator, operator state, data connection state, network type, bandwidth, connected band, signal strength (RSSI), SINR, RSRP, RSRQ, EC/IO, RSCP, data sent/received, LAC, TAC, cell ID, ARFCN, UARFCN, EARFCN, MCC, and MNC |
| SMS | SMS status, SMS configuration, EMAIL to SMS, SMS to EMAIL, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP |
| USSD | Supports sending and reading Unstructured Supplementary Service Data messages |
| Block/Allow list | Operator block/allow list (by country or separate operators) |
| Multiple PDN | Possibility to use different PDNs for multiple network access and services |
| Band management | Band lock, Used band status display |
| SIM PIN code management | SIM PIN code management enables setting, changing, or disabling the SIM card's PIN |
| APN | Auto APN |
| Bridge | Direct connection (bridge) between mobile ISP and device on LAN |
| Passthrough | Router assigns its mobile WAN IP address to another device on LAN |

| Wireless | |
|---|---|
| Wireless mode | 802.11b/g/n (Wi-Fi 4), Access Point (AP), Station (STA) |
| Wi-Fi security | WPA2-Enterprise: PEAP, WPA2-PSK, WPA-EAP, WPA-PSK, WPA3-SAE, WPA3-EAP, OWE; AES-CCMP, TKIP, Auto-cipher modes, client separation, EAP-TLS with PKCS#12 certificates, disable auto-reconnect, 802.11w Protected Management Frames (PMF) |
| SSID/ESSID | SSID stealth mode and access control based on MAC address |
| Wi-Fi users | Up to 100 simultaneous connections |
| Wireless Connectivity Features | Wireless mesh (802.11s), fast roaming (802.11r), Relayd, BSS transition management (802.11v), radio resource measurement (802.11k) |
| Wireless MAC filter | Allowlist, blocklist |
| Wireless QR code generator | Once scanned, a user will automatically enter your network without needing to input login information |
| TravelMate | Forward Wi-Fi hotspot landing page to a subsequent connected device |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| Ethernet | |
|---|---|
| WAN | 1 x WAN port 10/100 Mbps, compliance IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX |
| LAN | 3 x LAN ports, 10/100 Mbps, compliance IEEE 802.3, IEEE 802.3u standards, supports auto MDI/MDIX |

| Network | |
|---|---|
| Routing | Static routing, Dynamic routing (BGP, OSPF v2, RIP v1/v2, EIGRP, NHRP), Policy based routing |
| Network protocols | TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SFTP, FTP, SMTP, SSL/TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SMPP, SNMP, MQTT, Wake On Lan (WOL), VXLAN |
| VoIP passthrough support | H.323 and SIP-alg protocol NAT helpers, allowing proper routing of VoIP packets |
| Connection monitoring | Ping Reboot, Wget Reboot, Periodic Reboot, LCP and ICMP for link inspection |
| Firewall | Port forward, traffic rules, custom rules, TTL target customisation |
| Firewall status page | View all your Firewall statistics, rules, and rule counters |
| Port management | View device ports, enable and disable each of them, turn auto-configuration on or off, change their transmission speed, and so on |
| Network topology | Visual representation of your network, showing which devices are connected to which other devices |
| Hotspot | Captive portal (hotspot), internal/external Radius server, Radius MAC authentication, SMS authorisation, SSO authentication, internal/external landing page, walled garden, user scripts, URL parameters, user groups, individual user or group limitations, user management, 9 default customisable themes and optionality to upload and download customised hotspot themes |
| DHCP | Static and dynamic IP allocation, DHCP relay, DHCP server configuration, status, static leases: MAC with wildcards |
| QoS / Smart Queue Management (SQM) | Traffic priority queuing by source/destination, service, protocol or port, WMM, 802.11e |
| DDNS | Supported >77 service providers, others can be configured manually |
| DNS over HTTPS | DNS over HTTPS proxy enables secure DNS resolution by routing DNS queries over HTTPS |
| Network backup | Wi-Fi WAN, Mobile, VRRP, Wired options, each of which can be used as an automatic Failover |
| Load balancing | Balance Internet traffic over multiple WAN connections |
| SSHFS | Possibility to mount remote file system via SSH protocol |
| Traffic Management | Real-time monitoring, wireless signal charts, traffic usage history |
| Port Mirroring | Mirroring network traffic on Ethernet ports for monitoring and analysis |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| Security | |
|---|---|
| Authentication | Pre-shared key, digital certificates, X.509 certificates, TACACS+, Internal & External RADIUS users authentication, IP & login attempts block, time-based login blocking, built-in random password generator |
| Firewall | Preconfigured firewall rules can be enabled via WebUI, unlimited firewall configuration via CLI, DMZ, NAT, NAT-T, NAT64 |
| Attack prevention | DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks) |
| VLAN | Port and tag-based VLAN separation |
| Mobile quota control | Mobile data limit, customizable period, start time, warning limit, phone number |
| WEB filter | Block list for blocking out unwanted websites, allow list for specifying allowed sites only |
| Access control | Flexible access control of SSH, Web interface, CLI and Telnet |
| Certificate Manager | Certificate creation tool allows to create CA, server, client, let's encrypt, SCEP certificates |
| **VPN** | |
| OpenVPN | Multiple clients and a server can run simultaneously, 27 encryption methods |
| OpenVPN Encryption | DES-CBC 64, RC2-CBC 128, DES-EDE-CBC 128, DES-EDE3-CBC 192, DESX-CBC 192, BF-CBC 128, RC2-40-CBC 40, CAST5-CBC 128, RC2-64-CBC 64, AES-128-CBC 128, AES-128-CFB 128, AES-128-CFB1 128, AES-128-CFB8 128, AES-128-OFB 128, AES-128-GCM 128, AES-192-CFB 192, AES-192-CFB1 192, AES-192-CFB8 192, AES-192-OFB 192, AES-192-CBC 192, AES-192-GCM 192, AES-256-GCM 256, AES-256-CFB 256, AES-256-CFB1 256, AES-256-CFB8 256, AES-256-OFB 256, AES-256-CBC 256 |
| IPsec | XFRM, IKEv1, IKEv2, with 14 encryption methods for IPsec (3DES, DES, AES128, AES192, AES256, AES128GCM8, AES192GCM8, AES256GCM8, AES128GCM12, AES192GCM12, AES256GCM12, AES128GCM16, AES192GCM16, AES256GCM16) |
| GRE | GRE tunnel, GRE tunnel over IPsec support |
| PPTP, L2TP | Client/Server instances can run simultaneously, L2TPv3, L2TP over IPsec support |
| Stunnel | Proxy designed to add TLS encryption functionality to existing clients and servers without any changes in the program’s code |
| DMVPN | Method of building scalable IPsec VPNs, Phase 2 and Phase 3 and Dual Hub support |
| SSTP | SSTP client instance support |
| ZeroTier | ZeroTier VPN client support |
| WireGuard | WireGuard VPN client and server support |
| Tinc | Tinc offers encryption, authentication and compression in it's tunnels. Client and server support. |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| BacNET | |
|---|---|
| Supported modes | Router |
| Supported connection types | IP |
| Configuration options | Support for multiple BACnet/IP interfaces, Network number assignment, Preconfigured BDT entries for BBMD (BACnet Broadcast Management Device) |

| OPC UA | |
|---|---|
| Supported modes | Client, Server |
| Supported connection types | TCP |

| MQTT Gateway | |
|---|---|
| Modbus MQTT Gateway | Allows sending commands and receiving data from MODBUS Server through MQTT broker |

| MODBUS | |
|---|---|
| Supported modes | Server, Client |
| Supported connection types | TCP |
| Custom registers | MODBUS TCP custom register block requests, which read/write to a file inside the router, and can be used to extend MODBUS TCP Client functionality |
| Supported data formats | 8-bit: INT, UINT; 16-bit: INT, UINT (MSB or LSB first); 32-bit: float, INT, UINT (ABCD (big-endian), DCBA (little-endian), CDAB, BADC), HEX, ASCII |

| Data to Server | |
|---|---|
| Protocol | HTTP(S), MQTT, Azure MQTT |
| Data to server | Extract parameters from multiple sources and different protocols, and send them all to a single server; Custom LUA scripting, allowing scripts to utilize the router's Data to server feature |

| DNP3 | |
|---|---|
| Supported modes | Station, Outstation |
| Supported connection | TCP |

| DLMS/COSEM | |
|---|---|
| DLMS Support | DLMS - standard protocol for utility meter data exchange |
| Supported modes | Client |
| Supported connection types | TCP |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| API | |
|---|---|
| Teltonika Networks Web API (beta) support | Expand your device's possibilities by using a set of configurable API endpoints to retrieve or change data. For more information, please refer to this documentation: https://developers.teltonika-networks.com |

| Monitoring & Management | |
|---|---|
| WEB UI | HTTP/HTTPS, status, configuration, FW update, CLI, troubleshoot, multiple event log servers, firmware update availability notifications, event log, system log, kernel log, Internet status |
| FOTA | Firmware update from server, automatic notification |
| SSH | SSH (v1, v2) |
| SMS | SMS status, SMS configuration |
| Call | Reboot, Status, Mobile data on/off, Output on/off, answer/hang-up with a timer, Wi-Fi on/off |
| TR-069 | OpenACS, EasyCwmp, ACSLite, tGem, LibreACS, GenieACS, FreeACS, LibCWMP, Friendly tech, AVSystem |
| MQTT | MQTT Broker, MQTT publisher |
| SNMP | SNMP (v1, v2, v3), SNMP Trap, Brute force protection |
| JSON-RPC | Management API over HTTP/HTTPS |
| RMS | Teltonika Remote Management System (RMS) |

| IoT Platforms | |
|---|---|
| ThingWorx | Allows monitoring of: WAN Type, WAN IP, Mobile Operator Name, Mobile Signal Strength, Mobile Network Type |
| Cumulocity - Cloud of Things | Allows monitoring of: Device Model, Revision and Serial Number, WAN Type and IP, Mobile Cell ID, ICCID, IMEI, Connection Type, Operator, Signal Strength. Has reboot and firmware upgrade actions |
| Azure IoT Hub | Can be configured with Data to Server to send all the available parameters to the cloud. Has Direct method support which allows to execute RutOS API calls on the IoT Hub. Also has Plug and Play integration with Device Provisioning Service that allows zero-touch device provisioning to IoT Hubs |
| AWS IoT Core | Utility to interact with the AWS cloud platform. Jobs Support: Call the device's API using AWS Jobs functionality |

| System Characteristics | |
|---|---|
| CPU | Mediatek, 580 MHz, MIPS 24KEc |
| RAM | 128 MB, DDR2 |
| FLASH storage | 16 MB, SPI Flash |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| Firmware/Configuration | |
|---|---|
| WEB UI | Update FW from file, check FW on server, configuration profiles, configuration backup |
| FOTA | Update FW |
| RMS | Update FW/configuration for multiple devices at once |
| Keep settings | Update FW without losing current configuration |
| Factory settings reset | A full factory reset restores all system settings, including the IP address, PIN, and user data to the default manufacturer's configuration |

| FIRMWARE CUSTOMISATION | |
|---|---|
| Operating system | RutOS (OpenWrt based Linux OS) |
| Supported languages | Busybox shell, Lua, C, C++ |
| Development tools | SDK package with build environment provided |
| GPL customization | You can create your own custom, branded firmware and web page application by changing colours, logos, and other elements in our firmware to fit your or your clients' needs |
| Package Manager | The Package Manager is a service used to install additional software on the device |

| POE IN | |
|---|---|
| PoE+ ports | Port 1 (LAN1) |
| PoE standards | IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2), Alternative B compliant PD port (LAN1) |

| POE OUT | |
|---|---|
| PoE+ ports | Port 2 - 4 (LAN2, LAN3, WAN) |
| PoE standards | IEEE 802.3af (PoE, Type 1) and IEEE 802.3at (PoE+, Type 2), Alternative A compliant PSE ports (LAN2, LAN3, WAN) |
| PoE Max Power per Port (at PSE) | 30 W Max |
| PoE Power Budget (at PSE) | 90 W |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

| Power | |
|---|---|
| Connector | 4-pin industrial DC power socket |
| Input voltage range | 9 – 57 VDC, reverse polarity protection, surge protection >58 VDC 10us max |
| Input voltage range for PoE | 44 – 57 VDC |
| Power consumption | Idle: < 5 W, Max: < 6.5 W, PoE Max: 100 W |
| Power via PoE+ (802.3at Type 2) | Supports limited PoE output — up to 15 W total (1 port IEEE 802.3af Type 1) |
| Power via PoE (802.3af Type 1) | No PoE output available |
| Power via 4-Pin DC connector (<44V) | No PoE output available |
| Power via 4-Pin DC connector (>44V, ≥100W) | Full PoE+ operation — up to 90 W total (3 ports IEEE 802.3at Type 2) |

| Physical Interfaces | |
|---|---|
| Ethernet | 4 x RJ45 ports, 10/100 Mbps |
| I/O's | 1 x Digital Input, 1 x Digital Output on 4-pin power connector |
| Status LEDs | 1 x Bi-color connection status, 5 x Mobile connection strength, 4 x ETH status, 1 x Power |
| SIM | 2 x SIM slots (Mini SIM - 2FF), 1.8 V/3 V, external SIM holders, eSIM (Optional - different hardware required; contact your sales manager) |
| Antennas | 2 x SMA for LTE, 2 x RP-SMA for Wi-Fi antenna connectors |
| Reset | Reboot/User default reset/Factory reset button |

| Physical Specification | |
|---|---|
| Casing material | Aluminium housing, plastic panels |
| Dimensions (W x H x D) | 110 x 50 x 100 mm |
| Weight | 287 g |
| Mounting options | DIN rail, wall mount, flat surface (all require additional kit) |

| Operating Environment | |
|---|---|
| Operating temperature | -40 °C to 75 °C |
| Operating humidity | 10% to 90% non-condensing |
| Ingress Protection Rating | IP30 |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


## Certification

| | |
|---|---|
| EMEA | RUT951 PoE+ CE<br>RUT951 PoE+ UKCA<br>RUT951 PoE+ EAC<br>RUT951 PoE+ RoHS<br>RUT951 PoE+ REACH |
| APAC | RUT951 PoE+ RCM<br>RUT951 PoE+ ETA-WPC<br>RUT951 PoE+ Giteki<br>RUT951 PoE+ MTCTE |
| AMERICAS | RUT951 PoE+ FCC<br>RUT951 PoE+ IC(ISED)<br>RUT951 PoE+ PTCRB<br>RUT951 PoE+ UL/CSA Safety<br>RUT951 PoE+ UL/CSA Safety<br>RUT951 PoE+ NOM |
| CARRIER | RUT951 PoE+ AT&T<br>RUT951 PoE+ Verizon<br>RUT951 PoE+ T-Mobile |
| MISCELLANEOUS | RUT951 PoE+ GCF<br>RUT951 PoE+ Wi-Fi CERTIFIED<br>RUT951 PoE+ UN ECE R10<br>RUT951 PoE+ UN ECE R118<br>RUT951 PoE+ CB Scheme |
| SAFETY & ENVIROINMENTAL | RUT951 PoE+ WEEE |


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

# Hardware


## FRONT VIEW

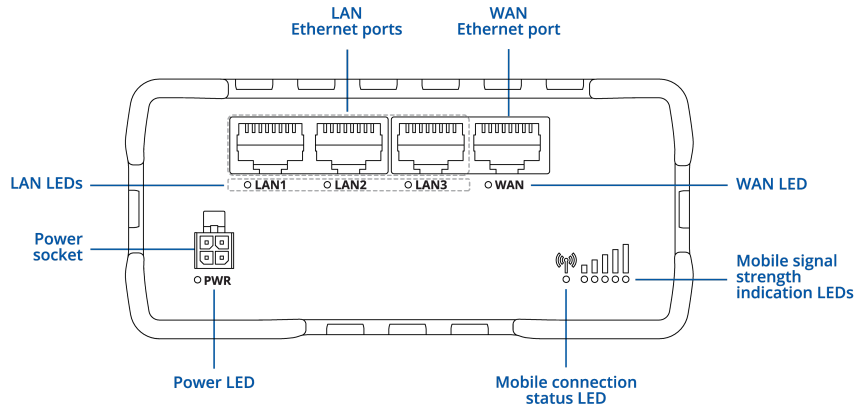


## BACK VIEW

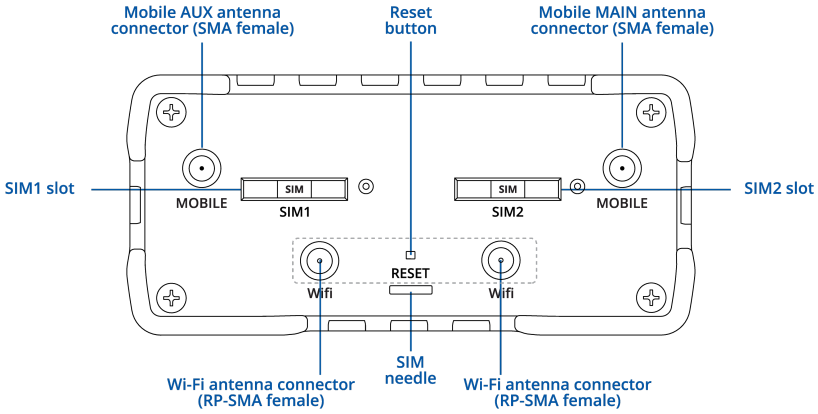


## POWER SOCKET PINOUT

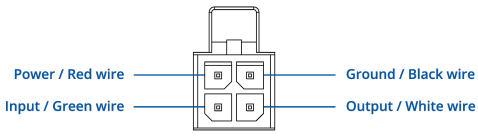


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

## Ordering

**Standard package***




RUT951 PoE+



QUICK START GUIDE



2 X MOBILE SMA ANTENNAS



2 X WI-FI SMA ANTENNAS



ETHERNET CABLE 1.5 M



SIM ADAPTER KIT

*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please contact us directly.

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

## Classification codes

**HS Code:** 851762
**HTS:** 8517.62.00

For more information on all available packaging options – please contact us directly.

## Available versions

| Hardware version | Supported frequencies | Standard order code / Package Contains |
|---|---|---|
| RUT951 **A*****<br>North America[2] | **4G (LTE-FDD)**: B2, B4, B5, B12, B13, B14, B66, B71<br>**3G**: B2, B4, B5 | RUT951A10J00 / Standard package without PSU<br>RUT951A10P00 / Standard Package with US PSU |
| RUT951 **B*****<br>EMEA[1], Korea, Thailand | **4G (LTE-FDD)**: B1, B3, B5, B7, B8, B20<br>**4G (LTE-TDD)**: B38, B40, B41<br>**3G**: B1, B5, B8<br>**2G**: B3, B8 | RUT951B10J00 / Standard package without PSU<br>RUT951B10K00 / Standard package with EU PSU<br>RUT951B10L00 / Standard Package with UK PSU<br>RUT951B10300 / Mass packing code |
| RUT951 **6*****<br>South America, Australia, New Zealand, Taiwan | **4G (LTE-FDD):**B1, B3, B4, B5, B7, B8, B28<br>**4G (LTE-TDD):** B40<br>**3G:** B1, B2, B4, B5, B8<br>**2G:** B2, B3, B5, B8 | RUT951610R00 / Standard Package with AU PSU<br>RUT951610K00 / Standard Package with EU PSU<br>RUT951610P00/ Standard Package with US PSU<br>RUT951610J00 / Standard package without PSU<br>RUT951610300 / Mass packing code |
| RUT951 **9*****<br>Japan | **4G (LTE-FDD)**: B1, B3, B8, B18, B19, B26<br>**4G (LTE-TDD)**: B41<br>**3G**: B1, B6, B8, B19 | RUT951910T00 / Standard package without PSU |

The price and lead-times for region (operator) specific versions may vary. For more information please contact us.

1 - Regional availability - excluding Russia, Belarus & Iran
2 - For more detailed information about certified carriers, visit our Wiki page


## RUT951 PoE+ spatial measurements

| Available versions | |
|---|---|
| Box (W x H x D): | 355 x 60 x 175 mm |
| Device housing (W x H x D)* | 110 x 50 x 100 mm |

Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


### TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:

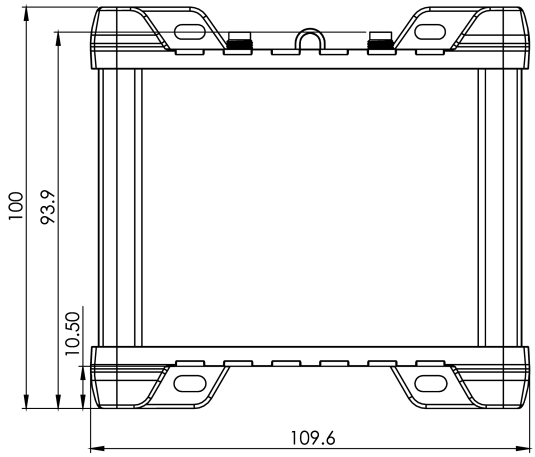



### RIGHT VIEW

The figure below depicts the measurements of device and its components as seen from the right side:

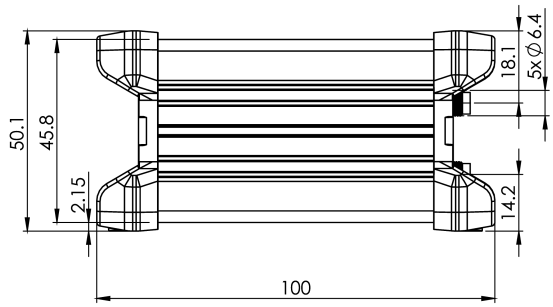


### FRONT VIEW


The figure below depicts the measurements of device and its components as seen from the front panel side:

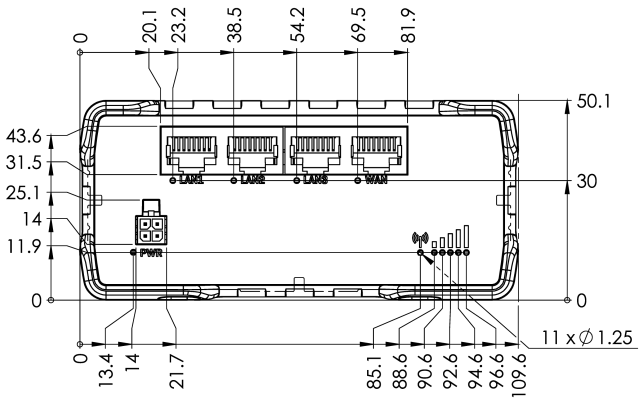


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.


## REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

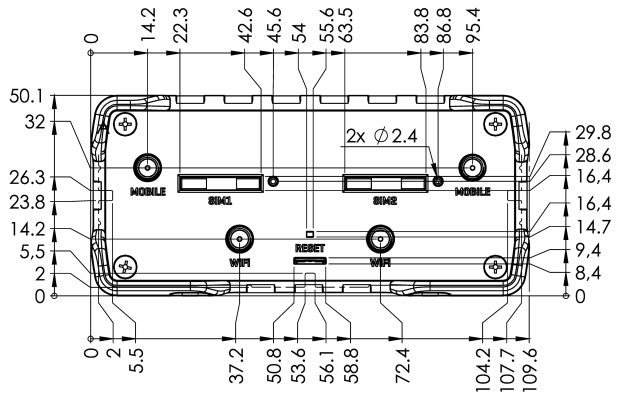


## MOUNTING SPACE REQUIREMENTS


The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

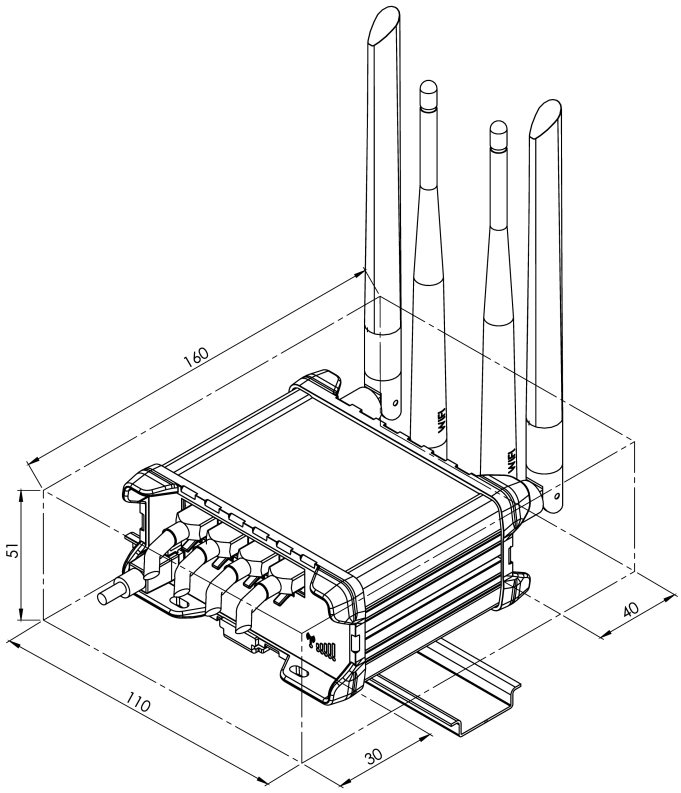


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

## DIN RAIL

The scheme below depicts protrusion measurements of an attached DIN Rail:

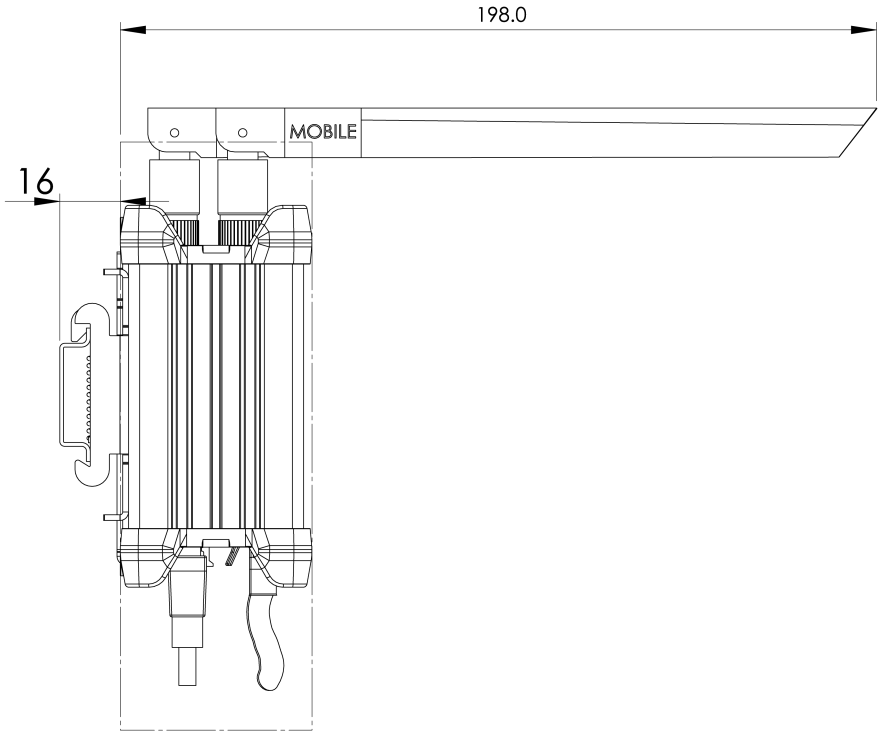


Copyright © 2026, UAB TELTONIKA NETWORKS.
Specifications and information provided in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

# Millbeck.

IoT Connectivity

## ABOUT

Millbeck is a UK-based IoT and M2M connectivity specialist, supplying the SIM technology, networking hardware and technical expertise that keep connected devices online, wherever they're deployed.

With over 20 years' experience in cellular networking, our team has built deep sector knowledge and strong partnerships with leading carriers and hardware manufacturers across the UK, Europe and globally.

## TIMELINE

**2002 — MILLBECK FOUNDED**
Business connectivity for UK SMEs

**2008 — FIRST IOT SIM SOLUTION PROVIDED**
Cellular SIM solutions commence

**2018 — ROAMING IOT SIMS LAUNCHED**
The next step in IoT connectivity begins

**2024 — TELTONIKA DIAMOND PARTNER**
Millbeck appointed as a key Teltonika partner

**NOW — UK, EUROPE & GLOBAL DEPLOYMENTS**
Connecting devices across every sector

## EXPERTISE

- Routers
- Antennas
- Networking
- IoT SIMs
- IoT Consultancy

## SIM TECHNOLOGIES

- 2G/3G, 4G LTE, 5G, CAT-M1, LTE-M, VoLTE & NB-IoT
- eUICC
- eSIM
- Fixed Public IP
- Fixed Private IP
- IPSec VPN
- SSL VPN

sales@millbeck.co.uk 0113 548 0770 millbeck.co.uk

# Millbeck.




sales@millbeck.co.uk 0113 548 0770 millbeck.co.uk