


SZ-T8-4FT-24 (G13 ACP AB)



General Specifications


| | |
|-------------------|---|
| Model Number | SZ-T8-4FT-24 (G13 ACP AB) |
| Cap-Base | G13 |
| LED Type/Qty | SMD2835 / 288 PCS |
| Power | Adjustable: 10W/12W/15W/18W/24W |
| Product Size | 4FT |
| Lumen Flux | Max 3120LM 130LM/W |
| Color Temp (6CCT) | Adjustable: 3000K/3500K/4000K/5000K/6000K/6500K |
| Main Material | Aluminum & PC Cover Clear/Stripy/Milky |
| Beam Angle | >120° |
| Warranty | 3 Years |
| Lifespan | 50,000 Hour |

Electrical Specifications

| | |
|--------------|--|
| Installation | Type A+B, Plug & Play Compatible Electronic Ballast & ballast bypass, Direct wire, Single-End or Double-End Input. |
|--------------|--|

| | |
|---------------|------------------------|
| Input Voltage | AC100-277V |
| Frequency | 50/60Hz |
| Power Factor | >0.9 |
| Application | |
| Application | Indoor use |
| Environment | -20° C~40° C/10%~90%RH |
| Certification | |
| Certification | UL |
| Packing | |
| Package | 25pcs/carton |
| Gross Weight | 7.2kg/carton |
| Net Weight | 6.5kg/carton |
| Package Size | 1235*185*185mm |

Dimension: 4FT,48" x 1.12" x 1.28"

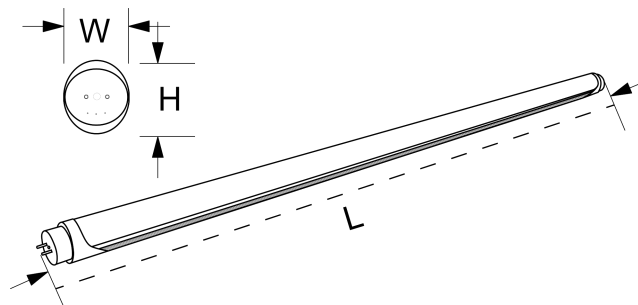

Warranty

This product has a warranty of period of 3 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4° F~104° F, storage temperature: -22° F~140° F.