

INSTALLATION INSTRUCTIONS

FOR 24 VOLT MERCHANDISER

Please read and understand these instructions before beginning the installation.

WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

1. Remove the 6 screws and access panel from the unit (Figure 2).
2. If the unit has a lead assembly factory installed go to step 6. If the unit does not have the factory installed lead assembly go to step 4.
3. Select the desired location for the 24 volt lead assembly. Refer to Figure 1.
4. Install the 24 volt lead in the selected location, see detail A.
5. Install the merchandiser mounting panel using the 4 screws removed in step two. (See Figure 3) Route the 24 volt lead through the hole in the panel.
6. Remove the screws from the merchandiser front. Remove the reflector assembly from the merchandiser. (See Figure 3).
7. Place the merchandiser assembly on the tower base and secure with two screws removed in step 2.
8. Install the merchandiser reflector assembly.
9. Connect the 24 volt lead assembly to the mating socket connector on the rear of the reflector assembly.
10. Close the merchandiser front and secure with the screw removed in step 6.
11. Connect the electrical power to the unit.

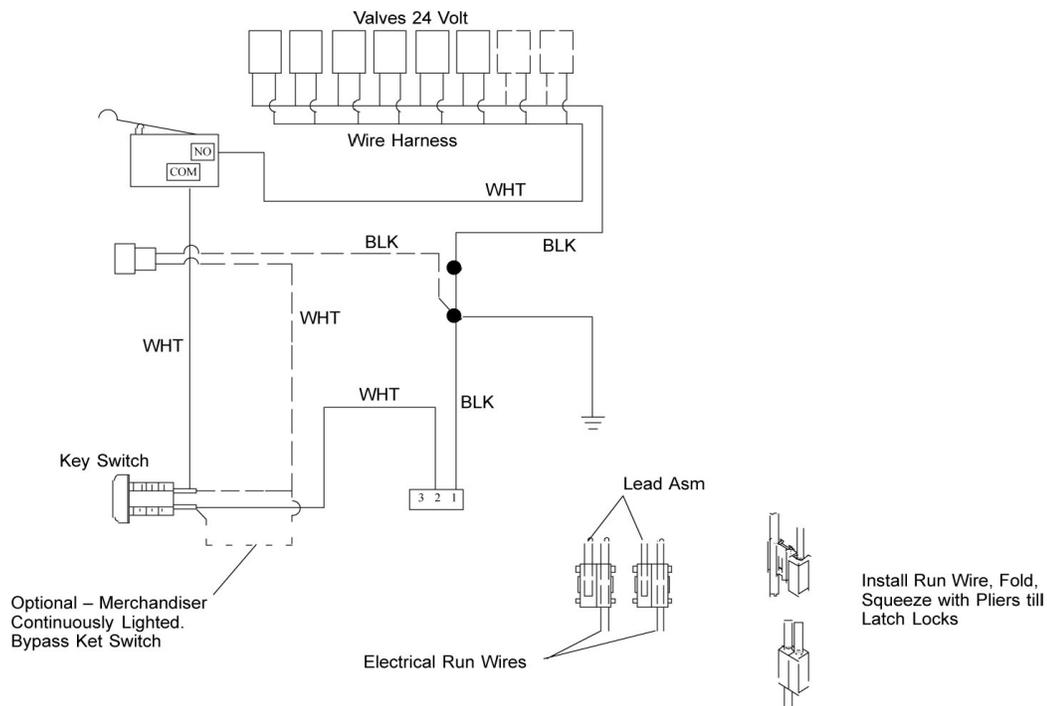


Figure 1.

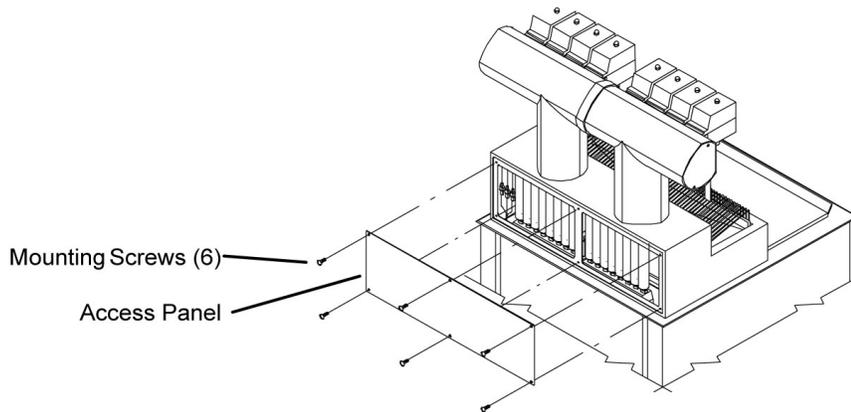


Figure 2. Panel Removal

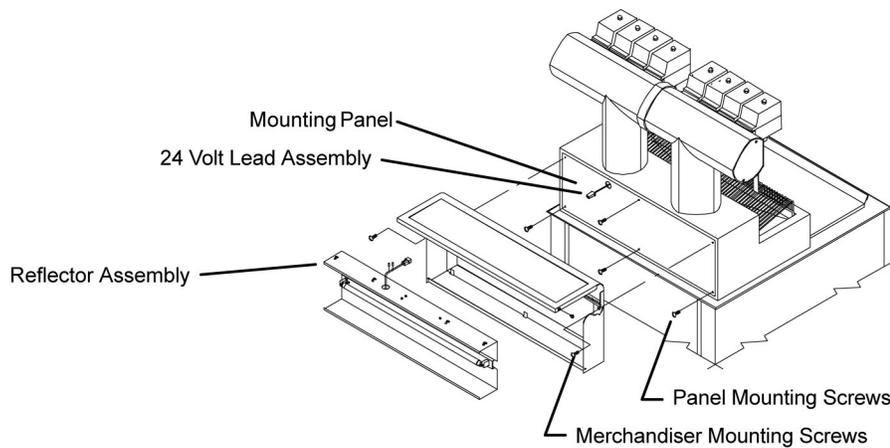


Figure 3. Installation

SI No.	Part Number	Description	SI No.	Part Number	Description
1	166252116 625210201	Dome Outer 23" Merch. Dome Outer 18" Merch.	7	167766006 167766007	Reflector, 23" Merch. Reflector, 18" Merch.
2	166037002	Clip Canoe Black	8	167761001	Transformer, 24 Volt
3	161098006 161098008	Lens Retainer, Lens Retainer, 18" Merch	9	164082001	Screw
4	161098XXX	Sign, Specify size & logo	10	166252201 166252202	Base 23" Merch. Base 18" Merch.
5	163501000 161012000	Lamp, 23" Merch. Lamp, 18" Merch.	11	163518000	Connector
6	161010001	Lamp holder	12	167770000	Lead Assembly
			13	164085000	Screw