

#### HOUSING

Injection-molded, engineering grade. 5VA flame retardant, high-impact resistant, thermoplastic in gray finish.  
Aluminum canopy

#### WARRANTY/LISTING

Five year warranty on all electronics and housing.  
cUL and UL Listed for wet location(0°C-40°C).

#### SZ-EXIT-Remote-1 (IP65-P)

##### MOUNTING

Wall mount  
Max. mounting height: 9.75ft (2.97m)  
Suitable for wet location application

##### ILLUMINATION


1.2W lamp head with 12pcs SMD 2835 LEDs

##### ELECTRICAL

Max. 1.2w Input 3.6V-9.6V

#### DIMENSIONS

Size: inch

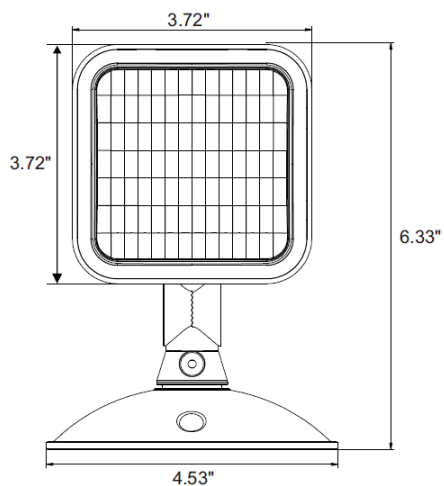

#### SZ-EXIT-Remote-2 (IP65-P)

##### MOUNTING

Wall mount  
Max. mounting height: 13.29ft (4.05m)  
Suitable for wet location application

##### ILLUMINATION

2\*1.2W lamp head with 24pcs SMD 2835 LEDs

##### ELECTRICAL

Max. 2.4w Input 3.6V-9.6V

#### DIMENSIONS

Size: inch

