


LED STRIP



Application

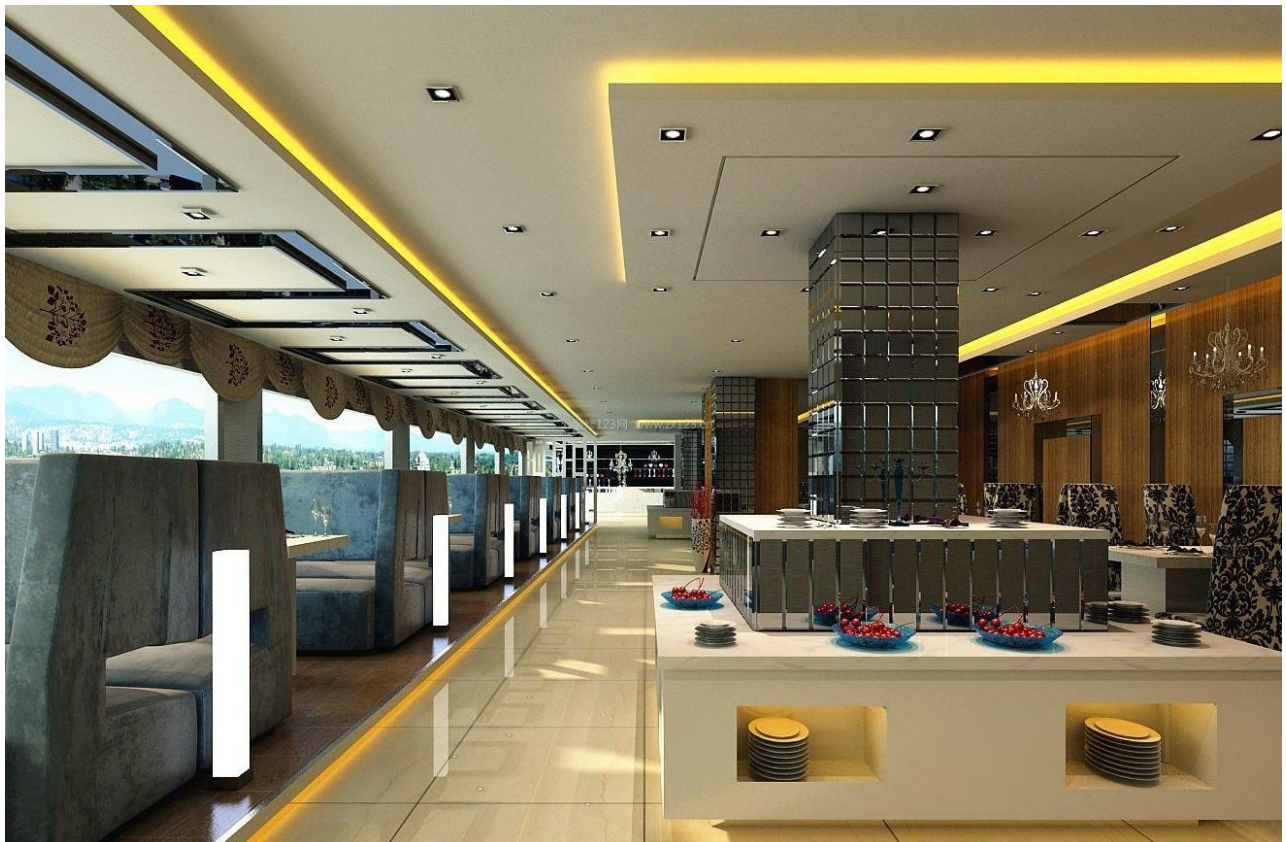

Product Features


1. No spot, no shadow, soft light.
2. CRI 90
3. The largest emitting angle can reach to 120°
4. Can be cut, and be free to cut off and weld along with the above cutting line.

PARAMETER


Model No.	JE-004W-ST-X	SMD Type	2835
Input voltage	24V	Working hour	50000h
CRI(Ra)	>90	Working temperture	-25℃~+45℃
Bram angle	120°	Cutttable length(mm)	50
LEDs /m	120LEDs	PCB Width(mm)	8
CCT	2700K/3000K/3500K/4000K/5000K	Watt	1.5W/Foot
Lumen	>150LM/Foot	IP Grade	IP20

Structure & Parameter

120LEDs/m, DC24V

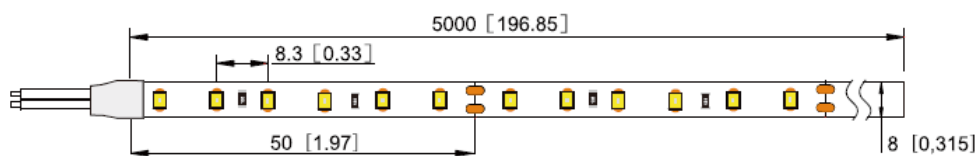


Wiring Diagram

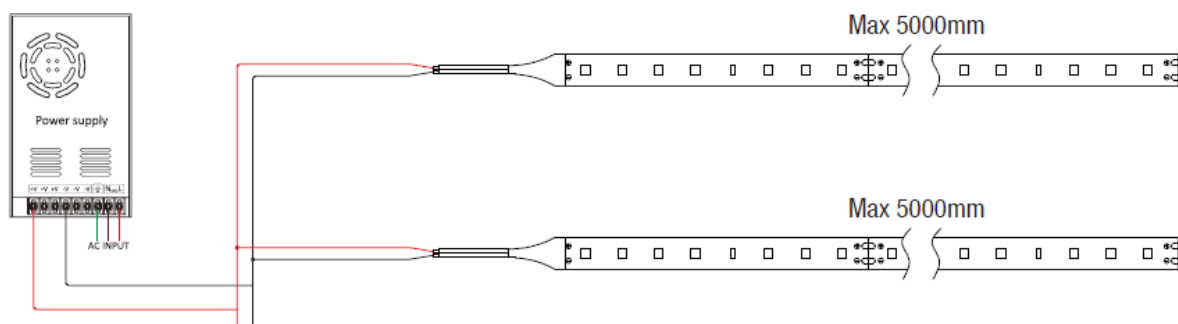




Cautions

When install the led strip, please note the installaiton technique. The led strip can be bent, but not distorted, as shown below.

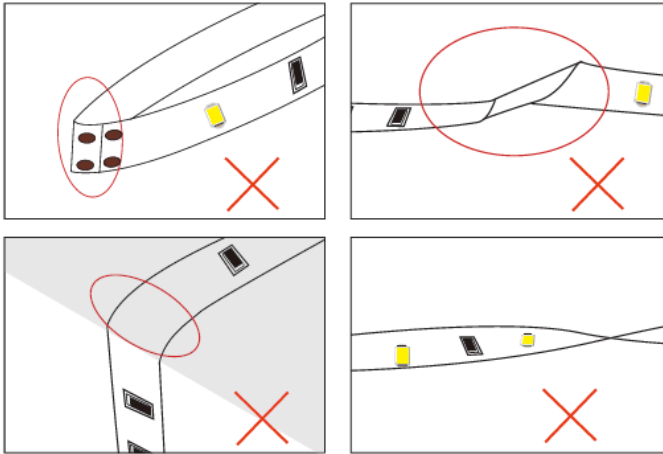

Distortion (Wrong)

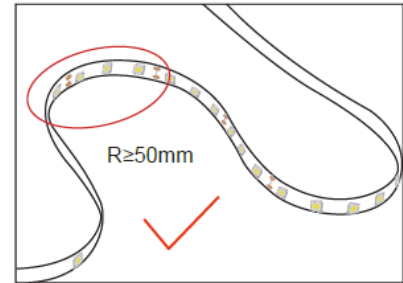

Bend (Right)

➤ LED strips are low votage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110V or AC 220V, otherwise it will burn out the LED strips.

➤ Clean up the installation surface, it will ensure the reliability of the adhesive, .The electrical connection process must be operated by a professional person.