





LED UFO High Bay


Model: SZ-HB100W-H-ACP


Advantage:


- UL & DLC certificate
- 2835 Chip, high CRI
- Input voltage 120-277VAC, 120-347V, 277-480V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Application:

Warehouse, factory and workshops; Highway toll station and gas station; Exhibition hall; Gymnasium and supermarkets, etc.









Product Specifications

Product Name	LED UFO High Bay	
Light Type	SZ-HB100W-H-ACP	
Dimension	Φ9. 88*6. 8"	

Technical Characteristic

Color temperature	Adjustable CCT:3500K/5000K/6500K or 4000/5000/6000K
CRI	>80
Lumen	14000LM
Lumen Efficacy	140LM/W
Input Power	Adjustable power: 60W/80W/100W
Viewing Angle	110 Degree
Input Voltage	120-277V 50/60Hz, Optional:120-347V / 277-480V
Driver model	China Brand driver, (0-10Vdc Dimmer, Surge-protective 6KV)
Motion sensor	With motion sensor base
PF	>0.9
Waterproof Rating	IP65

Materials

LED Type	2835
LED QTY	312PCS
Housing	Aluminum(ADC12)
Housing color	Black
Cover	PC
Operating Temperature	-40℃ TO 45℃
Operating Humidity	10%-90% RH
Storage Temperature	-40℃ T0 80℃

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL & DLC
Warranty Time	5 Years


TECHNICAL DATA SHEET


Light Distribution Testing Parameters

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.30V I:0.8342A P:100.02W F Lamp Flux:14155.1x1 lm	F:0.9967 Freq:59.98Hz		
NAME: SZ-HB100W-H-ACP	TYPE:	WEIGHT:	
SPEC.: 260*260	DIM.:	SERIAL No.: 20230926001	
MFR.:	SUR.: 260*260	Shielding Angle:	

D.	ATA OF LAN	MP	0	PHOTOME	TRIC DATA Eff: 141	52 lm/W
MODEL	SZ-HB1	OOW-H-ACP	Imax(cd)	5834	S/MH(CO/180)	1.32
NOMINAL	POWER (W)	100	LOR(%)	100.0	S/MH(C90/270)	1.34
RATED VO	LTAGE (V)	120	TOTAL FLUX(1m)	14155	η UP,DN(C0-180)	0.6,48.5
NOMINAL	FLUX(lm)	14155.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7,50.1
LAMPS IN	SIDE	1	η up(%)	1.3	CIBSE SHR NOM	1.50
TEST VOL	TAGE (V)	120	η down(%)	98.7	CIBSE SHR MAX	1.50

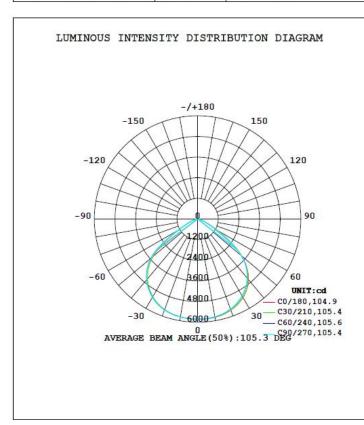

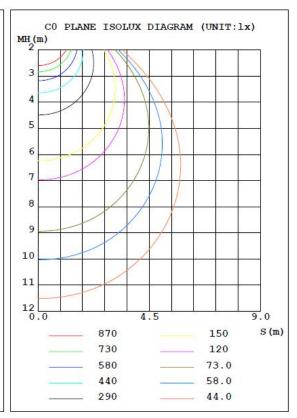

Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-HB100W+H-ACP	1.75 KG	11. 42*11. 42*6. 3"	1	2.35KG