



LED Mirror light
SZ-MIR25W-01-CCT

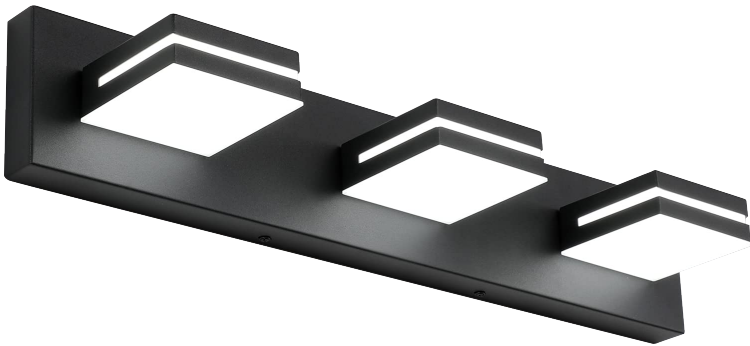

Applications

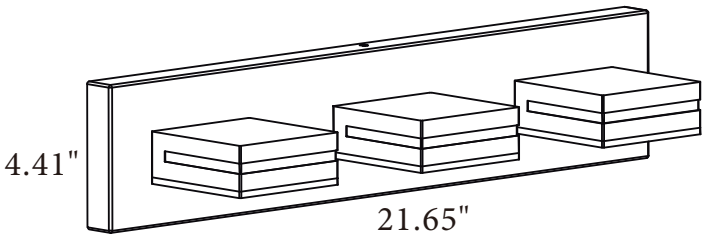

Finished



Size	Power	CCT Function	Lumen	CRI	Dim	Voltage	Certificate	PCS/CTN	CTN Size
26"(3 heads)	25W	5CCT	1500lm	80	Triac-Dim	120V	ETL/cETL	1pcs/CTN	/

Solution

- ETL/cETLus Listed 1598
- Inergrated AC Direct Drive(No DC Driver)
- Voltage 120V
- Wide temperature range(Tc) from -40°C to +85°C


Dimmer List

- Illuma Tech IPL06-107
 - Sure Slide 6672-1LM
 - Sure Slide 6674-P0W
 - Decora DLS06-1LZ
- Maestro CLMACL-153M
 - Skylark Contour CTCL-153P
 - Caseta PD-6WCL
 - Ariadni CL TGCL-153P

Gernal Specifications

Input Voltage / Frequency	120V 60HZ
Input PF .	0.90
Max Efieny	60LM/W
Dim mode	Triac-Dim
CRI	80
Input current	<10A
Turn on time	<0.5S
PCB Material	MCPCB
Operating Temperature Range	-25~45° C
LED model no.	2835 9V 1W
Use	Damp Rated
Warranty	5 years

Luminous intensity distribution diagram

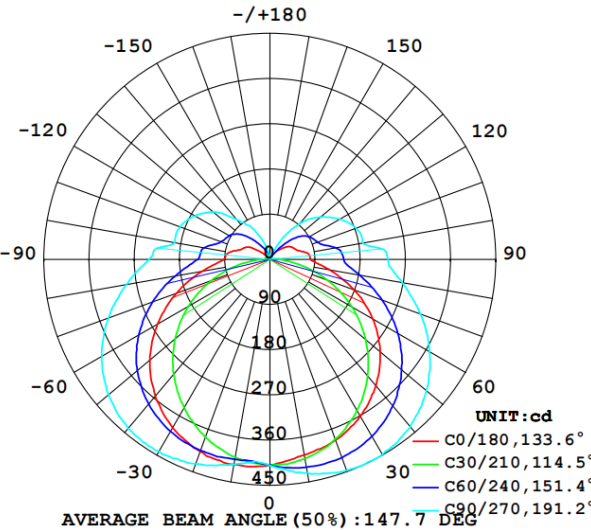

Installation

