

LED Mirror light
SZ-MIR25W-03-CCT




Factory Setting



After Extension

Applications

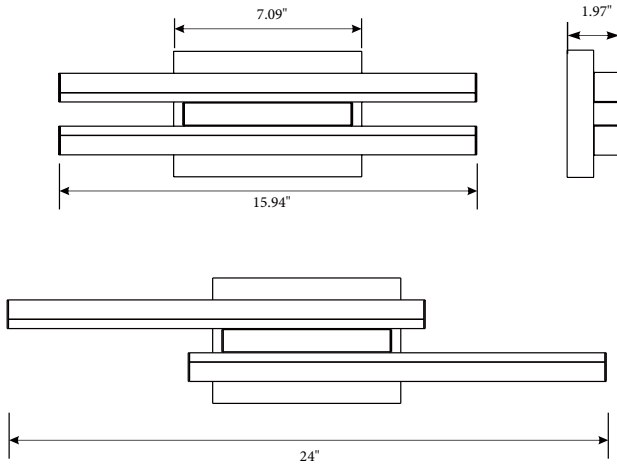

Finished



Black

Size	Power	CCT Function	Lumen	CRI	Dim	Voltage	Certificate	PCS/CTN	CTN Size
------	-------	--------------	-------	-----	-----	---------	-------------	---------	----------

16-24"	25W	5CCT	1700lm	80	Triac-Dim	120V	ETL/cETL	18PCS	/
--------	-----	------	--------	----	-----------	------	----------	-------	---

Solution

- ETL/cETLus Listed 1598
- Inergrated AC Direct Drive(No DC Driver)
- Voltage 120V
- Wide temperature range(Tc) from -40°C to +85°C


Dimmer List

- Illuma Tech IPL06-107
- Sure Slide 6672-1LM
- Sure Slide 6674-P0W
- Decora DLS06-1LZ
- Maestro CLMACL-153M
- Skylark Contour CTCL-153P
- Caseta PD-6WCL
- Ariadni CL TGCL-153P

Gernal Specifications

Input Voltage / Frequency	120V 60HZ
Input PF .	0.90
Max Efiency	68LM/W
Dim mode	Triac-Dim
CRI	80
Input current	<10A
Turn on time	<0.5S
PCB Material	MCPCB
Operating Temperature Range	-25~45° C
LED model no.	2835 9V 1W
Use	Damp Rated
Warranty	5 years

Luminous intensity distribution diagram

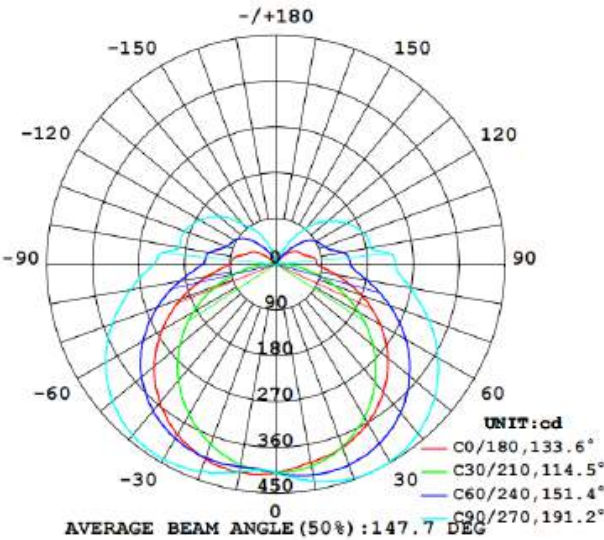

Installation

