



LED Mirror light
SZ-MIR25W-04-CCT

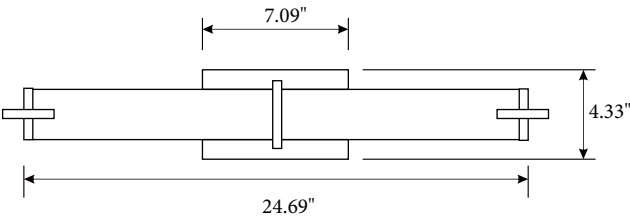

Applications

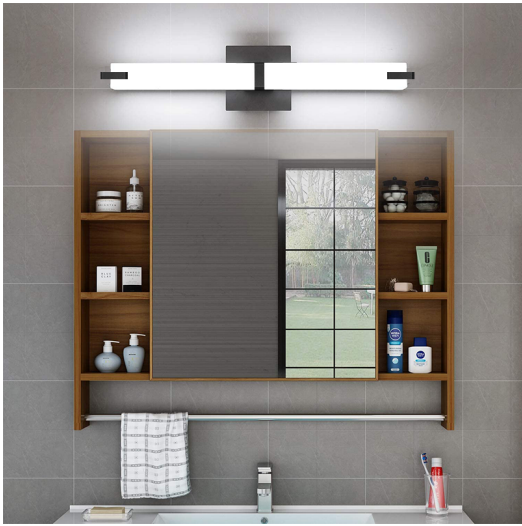

Finished



Specification

Size	Power	CCT	Lumen	CRI	Dim	Rated	Voltage	Listed
------	-------	-----	-------	-----	-----	-------	---------	--------

24"	25W	5CCT	1750lm	80	Triac-Dimmable	Damp	120V	ETL/cETL
-----	-----	------	--------	----	----------------	------	------	----------


Solution

- ETL/cETLus Listed 1598
- Inergrated AC Direct Drive(No DC Driver)
- Voltage 120V
- Wide temperature range(Tc) from -40°C to +85°C

Gernal Specifications

Input Voltage / Frequency	120V 60HZ
Input PF .	0.90
Max Eficiency	70LM/W
Dim mode	Triac-Dim
CRI	80
Input current	<10A
Turn on time	<0.5S
PCB Material	MCPCB
Operating Temperature Range	-25~45° C
LED model no.	2835 9V 1W
Use	Damp Rated
Warranty	5 years

Installation

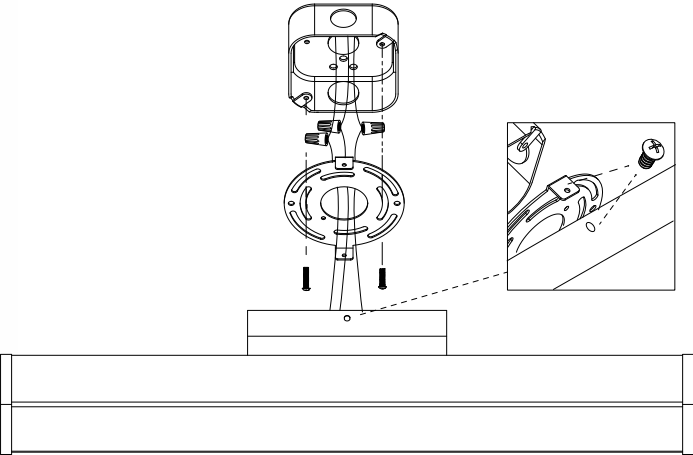

Dimmer List

- Illuma Tech IPL06-107
- Sure Slide 6672-1LM
- Sure Slide 6674-P0W
- Decora DLS06-1LZ
- Maestro CLMACL-153M
- Skylark Contour CTCL-153P
- Caseta PD-6WCL
- Ariadni CL TGCL-153P

Luminous intensity distribution diagram

