

Leading the way in hazardous area static control

Application Spotlight



Online
Enquiry >



Earth-Rite® PLUS Static Grounding Protection for Rail Tankers (Rail Cars or Railroad Tank Cars)

In the hazardous process industries, more commonly referred to as the Ex/Hazloc industries, static electricity is generated virtually all of the time. Various grades of crude oil, refined petroleum products like LPG, and a host of chemicals fall into a category of materials that are often referred to as “static accumulators”. Materials in this category are known to be powerful attractors of electrons from other materials and resist “letting go” of electrons they come into contact with. In other words they “accumulate” static charge.

In a typical rail tanker loading operation, the static accumulating product is transferred from a storage tank via a gantry loading system into a receiving rail tanker. We can refer to the equipment involved in the transfer of product collectively as the product “transfer system”.

“ As the product makes its way through the transfer system to the rail tanker, the molecules in the product become electrostatically charged. ”

If the rail tanker does not have a direct connection to earth it will accumulate electrostatic charges on its surface, which will result in the voltage of the rail tanker rising dramatically in a very short space of time.

Because the rail tanker is at a high voltage, it will seek to find ways of discharging this excess potential energy and the most efficient way of doing this is to discharge the excess electrons in the form of a spark.

Energy discharged in static sparks

Grounded objects that are in close proximity to charged objects are good targets for electrostatic sparks and permitting the uncontrolled accumulation of static electricity in an Ex/Hazloc atmosphere is no different to having an engine’s spark plug exposed to a flammable atmosphere.

If the rail tanker is not grounded, its electrostatic voltage can build up to hazardous levels in less than 20 seconds. Table 1 illustrates how much energy can be discharged by a spark from a rail tanker charged to 20,000 volts.



When the energy of sparks discharged by static electricity is compared with the minimum ignition energies of a wide range of petroleum products and flammable chemicals, it’s easy to see why the rail tanker and any equipment connected to it, like flexible hoses and piping, should be bonded and grounded to mitigate accidents.

As can be seen in Table 1, isolated rail tankers can discharge sparks with a huge amount of energy. At these energy levels the prevention of electrostatic shocks to workers is also an important safety consideration.

Involuntary physiological reactions caused by electrostatic shocks could lead to trips and falls and could be particularly hazardous when personnel are working above ground level.

Of the several factors that contribute to static charging, the one variable that must definitely be controlled is the grounding of the rail tanker. Grounding the rail tanker ensures that the rail tanker’s resistance to the general mass of the earth is maintained at a level that does not impede the safe transfer of static charges from the rail tanker to ground.

Rail Tanker charged to 20,000 volts	Potential Spark Energy (mJ)
Rail Tanker	1,000

Table 1 - Potential energy of sparks from various objects

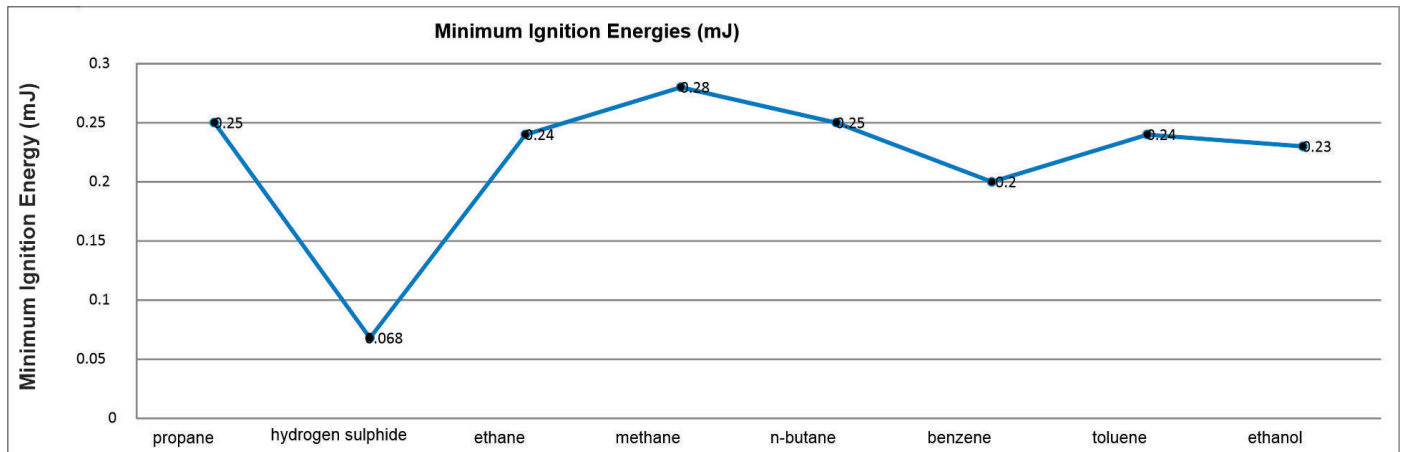


Fig. 1 - The MIEs of common petroleum products

In North America the grounding of rail tankers with dedicated static grounding systems is common practice. In Europe, the practice of rail tanker grounding is mixed. Some sites do it, some don't. For sites that do not actively ground rail tankers there is an assumption made that the tank of the rail tanker is well bonded to the chassis and that static charges generated by the product transfer operation can pass from the chassis through the rail tanker's wheels to earth or back to the loading gantry via bonding connections.

This is very rarely the case and it is better to fit a grounding system to ensure the safety of the product transfer and also provides compliance with International Standards, Guidance and/or Recommended Practices.

Relevant International Standards, Guidance and/or Recommended Practices related to the static grounding of rail tankers in Ex/Hazloc atmospheres:

IEC TS 60079-32 Section 7.3.2.3.4 - Precautions for Rail Tankers

TRGS 727:2016-01 – Technical rules for hazardous substances - Avoidance of ignition hazards due to electrostatic charges

NFPA77 Section 12 – Railroad Tank Cars

API RP 2003 Section 4.3 – Tank Car Loading

What is clear from the recommendations of IEC TS 60079-32-1, NFPA 77 and API RP 2003 is that 10 Ohms in the grounding and bonding circuit is the maximum resistance recommended for equipment at risk of electrostatic charging in Ex/Hazloc atmospheres. While API RP 2003 goes one step further in recommending 1 Ohm or less, if a grounding system with ground status indicators is in use, 10 Ohms is satisfactory. This is because the grounding system is continuously monitoring the resistance in the grounding circuit, so that if it rises above 10 Ohms, the grounding system can signal this potential hazard to the operator of the loading gantry. Another important recommendation is to use interlocks wherever possible, to ensure the transfer does not take place if grounding is not present. By halting the movement of product, the charge generation source is mitigated thus preventing additional charging of the rail tanker.

Specifying a Static Grounding System for rail tanker loading/unloading operations

One of the main problems with static electricity is that it is not something the operators can see, smell or hear. This characteristic of static electricity can, unfortunately, promote an attitude of "it can't happen to me" or "it doesn't exist" amongst personnel operating loading gantry systems. A grounding system that combines a simple visual "GO / NO GO" communication via a traffic light model of indication with interlock control capability is the most effective means of controlling the risk of ignitions caused by static electricity during rail tanker product transfer operations. Interlocking the transfer system with the grounding system is probably the ultimate layer of protection equipment specifiers and designers can take to ensure the rail tanker is grounded.

Newson Gale recommends the Earth-Rite® PLUS for bonding rail tankers to rail tanker loading gantries. Along with demonstrating the full range of ATEX, IECEx and cCSAus certification for all gas and liquid vapour groups, it also ensures there is a 10 Ohm, or less, connection between the rail tanker and the product transfer system. This provides equipment specifiers with the ability to demonstrate full compliance with the recommendations of IEC TS 60079-32-1.

By simply connecting the grounding clamp to the rail tanker the Earth-Rite PLUS automatically verifies if the rail tanker is connected to the loading gantry by delivering an Intrinsically Safe monitoring circuit to the system's Factory Mutual approved grounding clamp. The Factory Mutual approved stainless steel heavy duty grounding clamp ensures that a strong initial connection, via a pair of tungsten carbide teeth, is made to the rail tanker, and is then maintained for the duration of the product transfer operation, resisting movement caused by vibration or accidental dislodging.

Unlike standard grounding systems that rely on their non-monitored electrical ground connection to dissipate the static charges generated by the transfer, the Earth-Rite PLUS ensures that its dedicated static grounding connection to the loading gantry is always monitored, via the static ground connections G1 and G2 (ref. Fig. 2). This ensures there is a monitored connection directly between the rail tanker and the loading gantry.

“ This is an important feature as we are depending on the loading gantry's verified ground connection to dissipate static charges from the rail tanker to the general mass of earth. ”

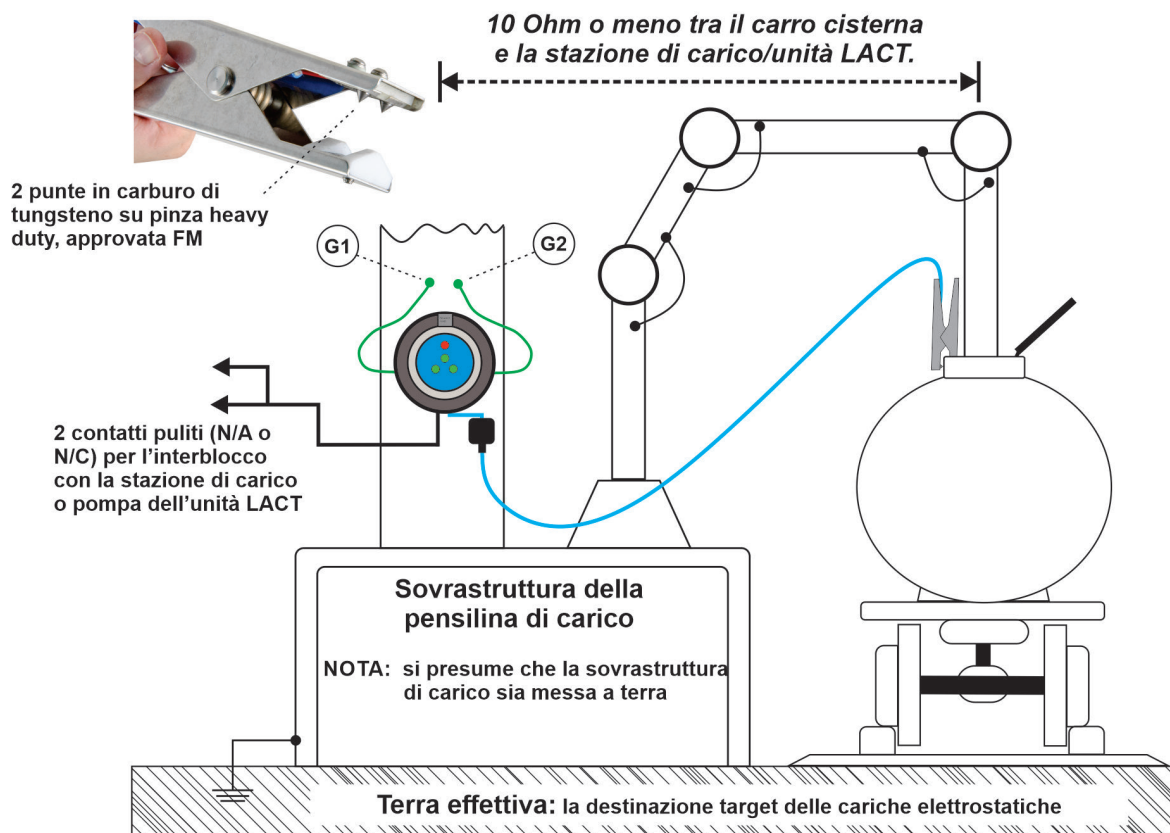


Fig. 2 - Typical Earth-Rite® PLUS rail tanker loading gantry installation. The tungsten carbide teeth on the grounding clamp are the contact points for the intrinsically safe signal that verifies if the rail tanker is grounded to the loading rack (or LACT unit) through connections G1 & G2 with a resistance of 10 Ohms or less

Earth-Rite® PLUS Static Grounding Protection for Rail Tankers (Rail Cars or Railroad Tank Cars)

When the Earth-Rite PLUS verifies the rail tanker is connected to the loading gantry superstructure, a cluster of attention grabbing green high intensity LEDs pulse continuously to inform the operator that the system is actively monitoring the integrity of the ground loop.

A pair of volt-free double pole, double throw, contacts can be interlocked with the power delivered to the pump or PLCs to halt the product transfer operation if the Earth-Rite PLUS detects a resistance of more than 10 Ohms in the ground loop between the rail tanker and the product transfer system.

Shutting down the transfer operation ensures the generation of static electricity is stopped thereby mitigating the risk of the rail tanker accumulating a voltage and discharging a static spark which could ignite combustible flammable or dust atmospheres present in the spark discharge gap.

Some customers like to have 2 off grounding systems per rail tanker. One attached to the bogie and the other attached to the man way close to the loading arm.

Sometimes even sections of the loading arm itself are monitored to ensure that these sections do not become isolated from each other and ground.

The Earth-Rite PLUS can be powered off a 115/230 V AC or 12/24 V DC source and is ATEX/IECEx approved for Zone 1 & 21 Gas and Dust installations.

For more information on static grounding protection in Ex/Hazloc atmospheres, visit www.newson-gale.co.uk.



Fig. 3 - Earth-Rite® PLUS ground status indicators pulse continuously when grounding is in place.

Copyright Notice

The website and its content is copyright of Newson Gale Ltd © 2021. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- you may print or download to a local hard disk extracts for your personal and noncommercial use only
- you may copy the content to individual third parties for their personal use, but only if you acknowledge the website as the source of the material

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

Right to change

This document provides general information only and may be subject to change at any time without notice. All information, representations, links or other messages may be changed by Newson Gale at any time without prior notice or explanation.

Newson Gale is not obliged to remove any outdated information from its content or to expressly mark it as being outdated. Please seek the advice of professionals as necessary regarding the evaluation of any content.

Disclaimer of liability

The information provided in this Application Spotlight is provided by Newson Gale without any representations or warranties, expressed or implied, as to its accuracy or completeness. The liability of Newson Gale for any expenses, losses or actions incurred whatsoever by the recipient as a result of the use of this Application Spotlight shall be excluded.

Leading the way in hazardous area static control



5/5

United Kingdom
Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK
+44 (0)115 940 7500
groundit@newson-gale.co.uk

United States
IEP Technologies LLC
417-1 South Street
Marlborough, MA 01752
USA
+1 732 961 7610
groundit@newson-gale.com

Deutschland
IEP Technologies GmbH
Kaiserswerther Str. 85C
40878 Ratingen
Germany
+49 (0)2102 58890
erdung@newson-gale.de