

DIAMOND BRITE[®]

EXPOSED AGGREGATE POOL FINISHES

**SGM's Premier Collection
of Elegant Pool, Spa & Deck Solutions**

SGM


Made in the U.S.A.

2026

*Behold the crown jewels of premium pool finishes -
beautiful, enduring, and refined.*

Your pool's finish should do more than look good. It should be durable under years of sun and water, comfortable to the touch, easy to maintain, and unmistakably striking at first glance. Do you envision the crystal-clear tranquility of Caribbean waters? Or a finish that captures the depth, drama, and mystery of the open ocean floor? Whatever your vision, SGM offers a finish crafted to bring it to life.

Backed by more than 48 years of experience, SGM delivers uncompromising quality, proven performance, and finishes you can trust—today, and for years to come.

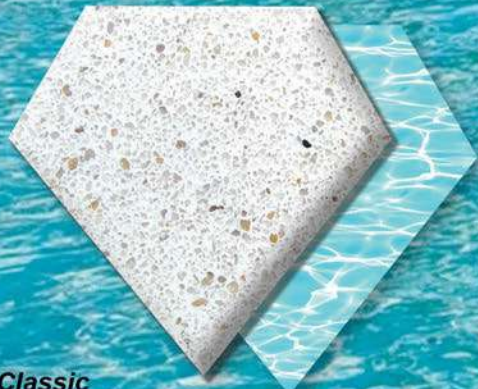

Classic

Alabaster



Moonstone



Obsidian



Blue Topaz



Tanzanite



Paraiba



NATURE'S MOST EXQUISITE GEMSTONE COLORS, BROUGHT TO YOUR BACKYARD.

Infuse your poolscape with the opulent brilliance of royal gemstones through Diamond Brite Jewels - our most exquisite collection of premium finishes.


Each surface radiates with vibrant color and a sophisticated sparkle which catches the eye. This creates shimmering highlights that dance across the water like the gems they are named after.

A tour de force of durability, fade resistance, and uniformity, our proprietary Jewels blend ensures your aquatic oasis not only looks stunning by embodying the pinnacle of grandeur, but exceeds all expectations in performance.

Meticulously crafted with our signature mini-pebble blend, River Rok delivers not only breathtaking visual depth, but a remarkably smooth, comfortable feel—setting a new standard beyond traditional pebble finishes.

**PEBBLE BRILLIANCE,
REFINED FOR THE MODERN AGE.**

LIKE A TRUE RIVERBED SHAPED BY TIME AND FLOW, OUR RIVER ROK FINISHES EVOKE A LIVING MOSAIC OF POLISHED STONE AND RIPPLED SAND—WHERE RUSTED REDS, HONEYED BROWNS, SLATE BLUES, AND LUMINOUS FLASHES OF QUARTZ SHIMMER BENEATH THE WATER'S SURFACE.

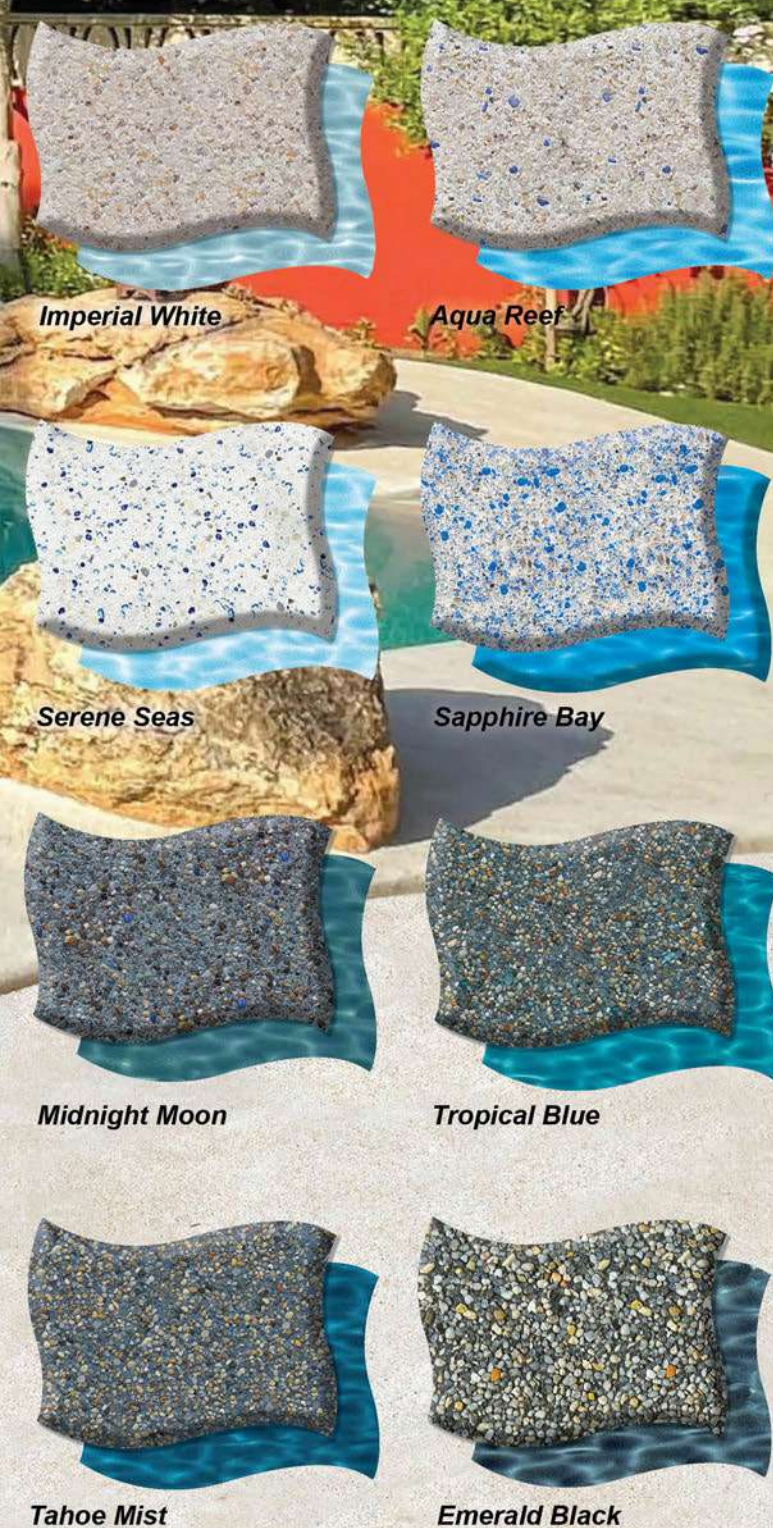

Cool Seas

French Blue

Blue Opal

Granite

Blue Granite

Harbor Gray

Tahoe Mist

Emerald Black

Imperial White

Aqua Reef

Serene Seas

Sapphire Bay

Lucayan Blue

Midnight Moon

Tropical Blue

Sample colors are as accurate as modern printing can produce.

Compare actual shade of plaster from bag with sample before installation. Use constitutes acceptance.

Photo Courtesy of Luxury Concrete, Valencia Spain - Imperial White

DIAMOND BRITE®

EXPOSED AGGREGATE POOL FINISHES

THE ORIGINAL. MATCHED BY NONE.

SGM'S FLAGSHIP PRODUCT LINE, DIAMOND BRITE, HAS EARNED ITS INDUSTRY LEADING REPUTATION THROUGH DECADES OF QUALITY, CUSTOMER SERVICE, AND ENDURING BEAUTY. OUR PIONEERING EXPOSED AGGREGATE POOL FINISH USHERED IN AN INDUSTRY WIDE REVOLUTION.


WHETHER YOU DESIRE BOLD DRAMA, SERENE CALM, OR BALANCED ELEGANCE, DIAMOND BRITE FINISHES ALLOW YOU TO CURATE A POOLSCAPE THAT IS AS UNIQUE AS YOUR LIFESTYLE.




Classic Ivory Oyster Quartz Blue



Cool Blue Blue Quartz

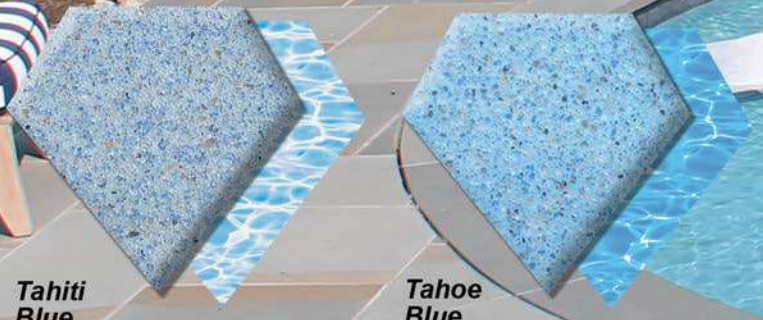

Tahiti Blue Tahoe Blue

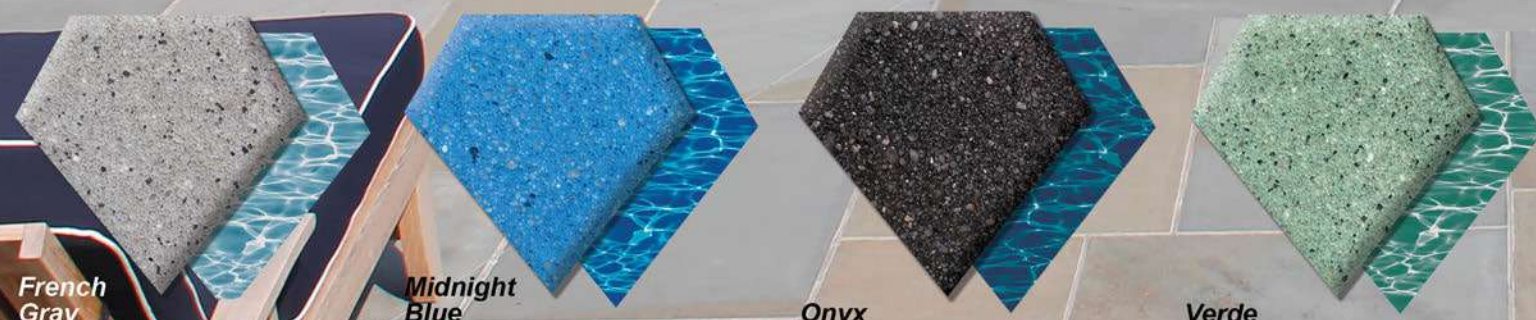

French Gray Midnight Blue Onyx Verde



Super Blue Aqua Blue Aqua Quartz Marlin Blue



Commercial White

Specially formulated for commercial installations, the Diamond Brite Commercial White finish offers a 10-year extended commercial warranty. This Diamond Brite product meets and exceeds industry and municipal standards for Total Solar Reflectance.*

Photo Courtesy of Aqua Bello Designs, PA- Tahoe Blue

Sample colors are as accurate as modern printing can produce. Compare actual shade of plaster from bag with sample before installation. Use constitutes acceptance.

* Please see page 19 for warranty details

DIAMOND BRITE® Watercolors

A BRUSH STROKE BEYOND



Curated for the trailblazers, the creatives, and adventurers, our Watercolor series is crafted by combining two or more Diamond Brite finishes to reveal a new uniquely blended color. For the bold at heart craving a choice off the beaten path.


DIAMOND QUARTZ

100% COLORED QUARTZ AGGREGATE

ADD A CREATIVE SPLASH
OF COLOR TO YOUR
POOL FINISH



Add Diamond Quartz to any SGM pool finish to customize your poolscape. Our ceramically coated colored quartz is ready for the creative minded individual to push the limits. Each crystal radiates vibrant color and luminous depth making it perfect for on-site job mixing.

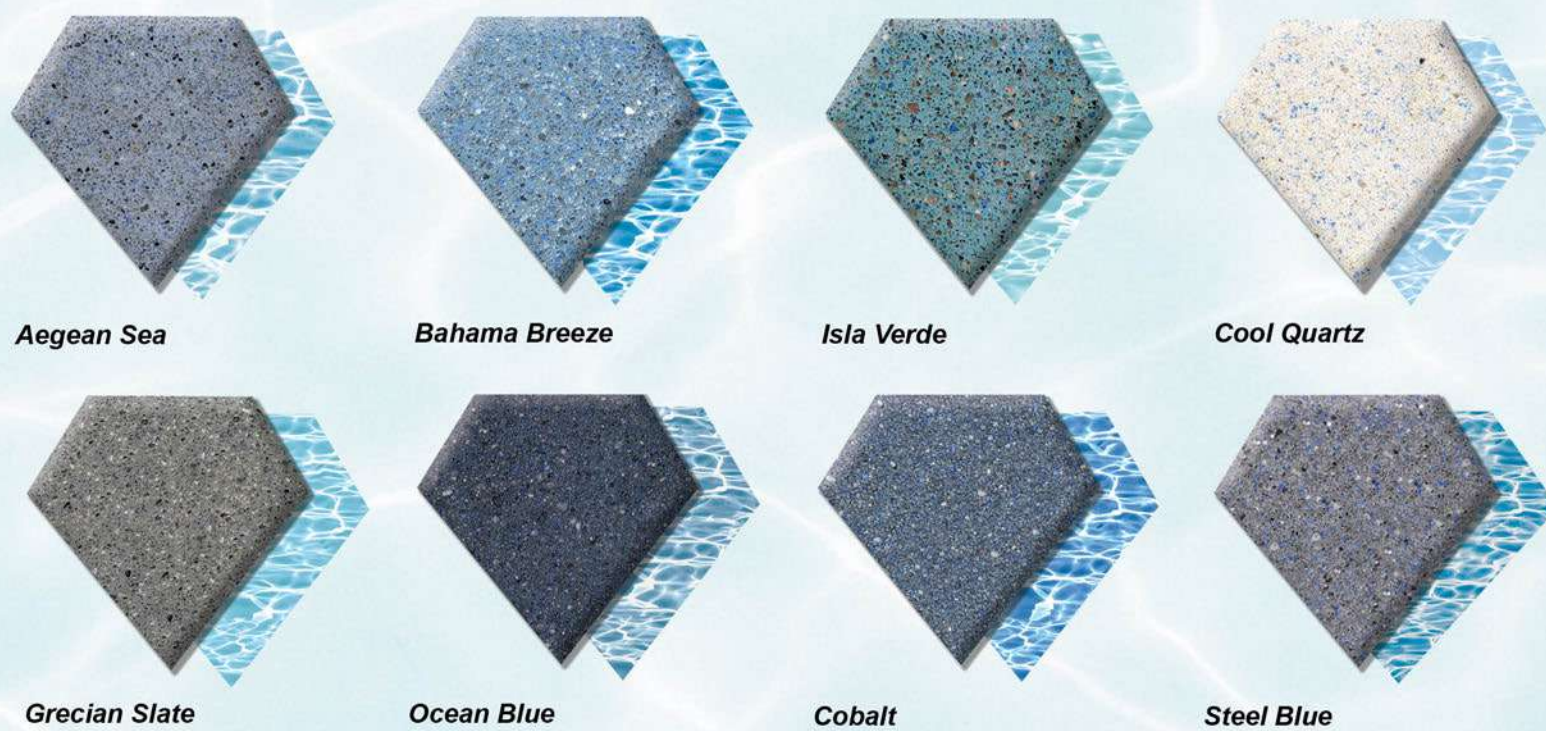

Aegean Sea

Bahama Breeze

Isla Verde

Cool Quartz

Grecian Slate

Ocean Blue

Cobalt

Steel Blue



White

Teal

Blue

Black

All colors are available in T grade, Blue is also available in S grade

DURAZZO™

POLISHED MARBLE POOL FINISH

EVERLASTING BEAUTY FOR YOUR DREAM POOLSCAPE

Elevate your outdoor sanctuary with Durazzo - the epitome of refined elegance and timeless allure. Imagine a polished marble pool that transcends ordinary design, becoming an expression of sophistication and serenity. Durazzo's exceptionally smooth yet resilient surface transforms water into liquid luxury, shimmering with natural beauty. For those who seek uniqueness, our premium blends can be custom-tailored, creating a poolscape that radiates originality and opulent charm.



Arctic White

Gulf Blue

Ocean Floor

Cerulean Seas

French Gray

Slate

Photo Courtesy of Luxury Pool of Miami, FL - Arctic White

DECORATIVE CONCRETE FINISHES

One-Step SPRAY DECK

Elevate your outdoor living experience with the One-Step Spray Deck System—where artistry meets innovation. Designed for discerning homeowners, the system transforms plain concrete into a sophisticated canvas of authentic textures and architectural elegance. Whether complementing grand design elements or blending seamlessly with lush landscapes, the result is a finish that exudes timeless luxury. Crafted to endure, it offers exceptional durability, effortless maintenance, and a pristine surface that enhances the beauty of your outdoor sanctuary for years to come.

COLOR GUARD

Preserve and enhance the beauty of your outdoor spaces with Southcrete Color Guard—a premium water-based penetrating stain and sealer designed to deliver lasting elegance. Applied over the One-Step Spray Deck System, it ensures a finish that stands the test of time while maintaining its vibrant appeal. Perfect for reconditioning and renewing existing concrete surfaces, Color Guard brings new life to your pool deck or patio with superior protection and enduring sophistication.



Clear



White



Silver



Nickel



Desert Sand



Eggshell



Ivory



Sea Shell



Kahlua Creme



Almond



Terracotta



Gun Metal

Sample colors are as accurate as modern printing can produce. Verify appearance with a test area before installation. Please request a Spray Deck key chain to make a color selection. Actual shade and texture will depend on job-site conditions, landscaping, mixing ratio, individual batches and installation methods. Use constitutes acceptance.

Over the last four decades...

Diamond Brite exposed aggregate pool finishes have been specified for use in major water theme parks, international resorts, competition, commercial and residential pools throughout the world. This is a small excerpt of the facilities where Diamond Brite was installed by our factory trained applicators. For a complete list with finish colors please visit: www.sgm.cc/pool-resource-library/pool_finish_reference_list

- ABAC College • Aberdeen Aquatic Ctr • Addison Athletic Club • Adventureland Park • **Air Force Academy** • Amos Park Pool • **Albany YMCA** • Alexandria YMCA • American Dream Mall • Apple Valley Aquatic Ctr • Aqualea Resort • AquaTech Corporation • Aquatic Development • **Aquatica by Seaworld** • Arkansas Swim Academy • **ASTF Lackland AFB** • **Atlantis Resort & Casino** • Augustus Brown Pool Parks & Rec. • Aurora Rec Ctr • Bahamar Resort Cable • Beaver Hills Country Club • Becker High School • Bedford Boys Ranch • Belle Fourche Rec Ctr • Best Western Resort • Blue Cypress Park • **Boston Celtics Aquatic Facility** • Breezes Superclub • Broadmoor Hotel - Camp Bowie Brownwood • Brookside Apartments • Buccaneer State Park • Bunker Hills Regional Park • Silver Bow Community Pool • C&L Farley's Boy Ranch • **Caesar's Palace Resort South** • Camp Tanager • **Cannon A.F. Base** • Capstone Cottages of San Marcos • **Caribbean Beach Resort** • Chippewa Middle School • Choice Wellness Ctr Pool • City of Rolla • City of Savannah • Clifton Hunter High School Pool • Columbia Basin Racquet Club / Pelican Baywater Park • **Coronado Springs Hotel** • Courtyard San Mateo Foster • City Crystal Cove Aquatic Center • Dallas Arboretum • **Dallas Zoo - Sting Ray Exhibit** • Davenport High School • Davies High School • **Diplomat Resort & Spa** • **Disney Animal Kingdom** • **Disney Art of Animation Resort** • **Disney Grand Floridian** • Dove Park Pool • Dry Creek Baptist Camp • Earlywine Park & Aquatic Ctr • Eden Rock Hotel • Emerald Tower • Essential Health • **Eubanks Natatorium** • Fairview Aquatic Ctr • Fairview Park / Gemini Project • Family Fun Corp • Farmtek • Fircrest Bath House & Pool • Florida Grande Motor Coach Resort • Flying Horse Athletic Club • **Fort Bliss - U.S. Army Base** • **Fort Riley** • **Fort Worth Zoo - Penguin Exhibit** • Fountains at Bob Jones University • Franklin D. Roosevelt Park • Geyser Falls Water Theme Park • **Goldfish Swim School** • Golden Ocala Golf Resort • Grand Lucayan Bahamas • **Great Wolf Lodge** • Happy Hollow Camp • **Hargrave Military Academy** • Harry Rowlinson Comm. Natatorium • **Hawks Cay Resort** • Hilton Garden Inn • **Hilton Grand Tuscany** • Hilton-Myrtle Beach Resort • Holiday Inn Express • Holiday Inn Resort • Holley by the Sea • Homewood Suites • Home 2 Suites Downtown Indy • Hurst Chisholm Aquatic Ctr • Incline Village Parks & Recreation • Jacob & Bowers Park Swim Pool • **Jewish Community Ctr of Dallas** • Johnson City High School • Julius Boehm Pool • Knightdale YMCA • Lake Ariel • Lacoste High School • **Lake Central High School** • Lantern House Stepping Stone Pool • Lido Beach Pool • **Lifetime Fitness** • Lion's Club Park Family Aquatic Ctr • Marian Center • Margaret Carpenter Recreation • **Mickeys Retreat Disney World** • Midlothian Country Club • Millennium Music Row • Missouri Western State University • Mitchell Aquatic Ctr • Modera Capitol Hill • Mountain Brook Country Club • **Myrtue Medical /Newell Ctr** • Mystic Bluff Apts. • National Aquatic Ctr • **Naval Spec Warfare Comm. Coastal Campus - Naval Training Ctr** • N.E. Regional Health Fitness • Norman Young Family Aquatic Ctr • Oak Point Recreation Ctr • Ohio Public Pool • **Old Key West Disney Resort** • **Opryland USA** • Orangelake Country Club • Ozaukee Country Club • Park Cities Family YMCA • Piedmont Aquatic Ctr • Pirates Cove Aquatic Ctr • Pleasant Valley Pool • **Pop Century Disney Resort** • Portafino Bay Hotel • Port Aventura Prairie View A&M University • Pump House at Jay Peak • **Quiet Waters Park** • **Radisson Blu Resort** • Radisson Indoor Water Park • Rainer Beach Community Pool • Regal Pointe Apartments • **Rice University** • RiNo Broadstone • **Ritz Carlton Club** • Riverside Public School • **Royal St. Kitts Resort & Casino** • **Sea World** • **Seminole Recreation Ctr** • **Sheraton Bal Harbor** • Sheraton Vistana Resort • Sleepy Eye Aquatic Ctr • Soldier's Field Swimming Pool • Spearfish Rec. Ctr • Splash Montana at Playfair Park • Splash Station • Springs of Hamburg • **Split Rock Water Park** • Stayridge Suites Denver • St. Bernard Wellness Institute • St. Louis Park Recreational Ctr • Stonegate Rec Ctr • **Stowflake Resort** • Summer Winds • Sunset Ridge Country Club • TCP Fitness Ctr • **Texas Tech Pool** • Texas Women's University • The Buffalo Road Aquatic Ctr • **The Dolphin Hotel at Disney** • The Four Seasons Hotel • The Grove Apartments • The Water Park of China National Swimming Ctr • Three Bears Resort • **University of Alabama** • University of Houston • University of South Dakota • University of Texas • Upcountry Pool • **Viceroy Anguilla Resort** • Villages of Adams Pointe • Vintage Oaks Community • Vistana Village Resort • Waconia Safari Island • Wadena Regional Wellness Ctr • Wallenpaupack Lake Estates • Wallman Wellness Ctr • **Walton Family Whole Health & Fitness** • Watermania •

Photo Courtesy of Rice University - Houston, TX - Commercial White

CHOOSE THE PERFECT WATER SHADE TO CREATE YOUR IDEAL POOLSCAPE



LIGHT BLUE

Diamond Brite: Blue, Blue Quartz, Classic, Commercial White, Cool Blue, Ivory, Oyster Quartz
Diamond Brite Jewels: Alabaster
Diamond Brite Watercolors: Cool Quartz
Durazzo: Arctic White, Gulf Blue
River Rok: Aqua Reef, Imperial White, Serene Seas




MEDIUM BLUE

Diamond Brite: Super Blue, Tahiti Blue, Tahoe Blue
Diamond Brite Jewels: Blue Topaz
Durazzo: Ocean Floor
River Rok: Blue Granite, Cool Seas, Sapphire Bay, Tahoe Mist




DARK BLUE

Diamond Brite: Midnight Blue
Diamond Brite Jewels: Tanzanite
Diamond Brite Watercolors: Aegean Sea, Bahama Breeze, Cobalt, Ocean Blue, Steel Blue
Durazzo: Ceruelan Seas
River Rok: Blue Opal, Midnight Moon, Tropical Blue, Lucayan Blue

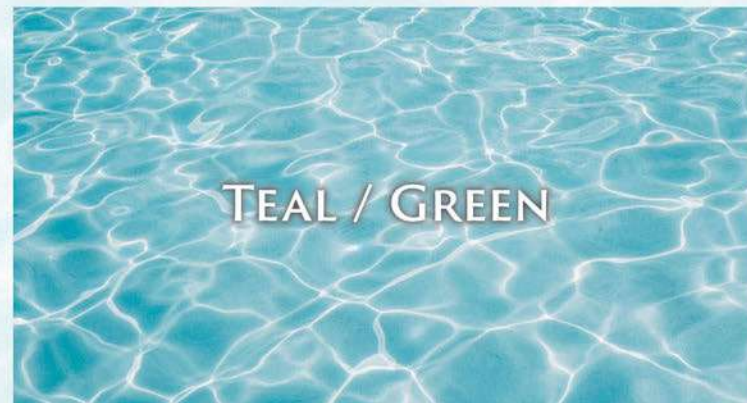

TEAL / GREEN

Diamond Brite: Aqua Blue, Aqua Quartz, Marlin Blue, Verde
Diamond Brite Jewels: Paraiba
Diamond Brite Watercolors: Isla Verde

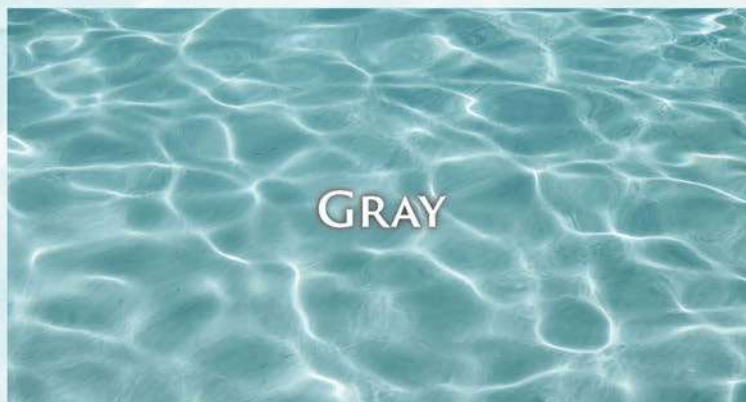

GRAY

Diamond Brite: French Gray
Diamond Brite Jewels: Moonstone
Diamond Brite Watercolors: Grecian Slate
Durazzo: French Gray
River Rok: French Blue, Granite, Harbor Gray



BLACK

Diamond Brite: Onyx
Diamond Brite Jewels: Obsidian
Durazzo: Slate
River Rok: Emerald Black

POOL FINISH APPEARANCE VARIANCES

A new pool finish is an important decision for any homeowner, commercial property manager or public facility supervisor. There are many conditions that need to be taken into consideration so the right pool finish is chosen for your unique poolscapes. One item to remember is that lighter finishes will keep the pool water cooler, while darker finishes absorb and hold the heat longer keeping the pool water warmer.

Once you have a water color in mind, your pool professional will be able to supply you with finish samples to review. The depth of your pool will also factor into your color selection. The sun shelf, beach entry or steps will have a much lighter color to the water than the deep end of your pool. Blue toned water will be achieved by using pool finishes with a base cement color of white, blue or gray. Blue-green toned water can be achieved with green, tan, black or brown base cement color. Varying degrees of water color tones are then derived by adding different colored aggregate, glass or natural pebbles to the base color.

Choosing the right texture for your pool finish, whether for residential or commercial use, is important for slip resistance and comfort. Finishes can be smooth, lightly or highly textured depending on the size of the aggregates, glass or pebbles in the finish and the amount of exposure the finish is given during the installation process.

Another factor that will affect your pool color is the landscape and immediate environment surrounding your pool. The reflective properties and chemistry of the water will alter the color of the pool depending on the following factors: the time of day or year, weather conditions the color of the deck/pool tile and the size, shape and depth of the pool.




CLOUDY
EARLY MORNING



SUNNY
MID-DAY




EARLY
EVENING

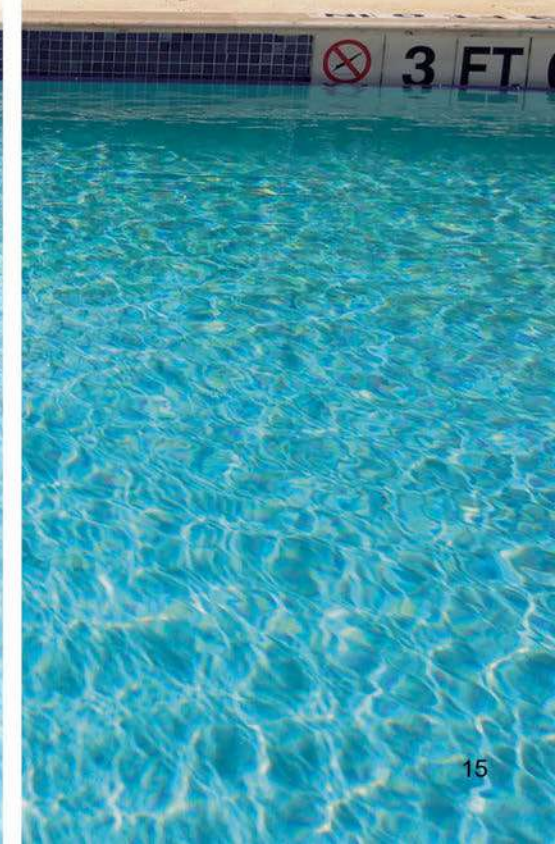

COMPLETE SOLUTIONS FOR POOL & SPA INSTALLATION

From meticulous surface preparation to premium tile and coping materials, SGM delivers everything you need to achieve a flawless pool or spa renovation. Our comprehensive range of installation systems is engineered for excellence - covering every stage of the process from start to finish. When it comes to quality, don't settle for less. Insist on SGM branded products - the trusted choice for professionals worldwide. Explore our website at www.sgm.cc for detailed technical information, global applications, and the full spectrum of SGM Swimming Pool Installation Systems.

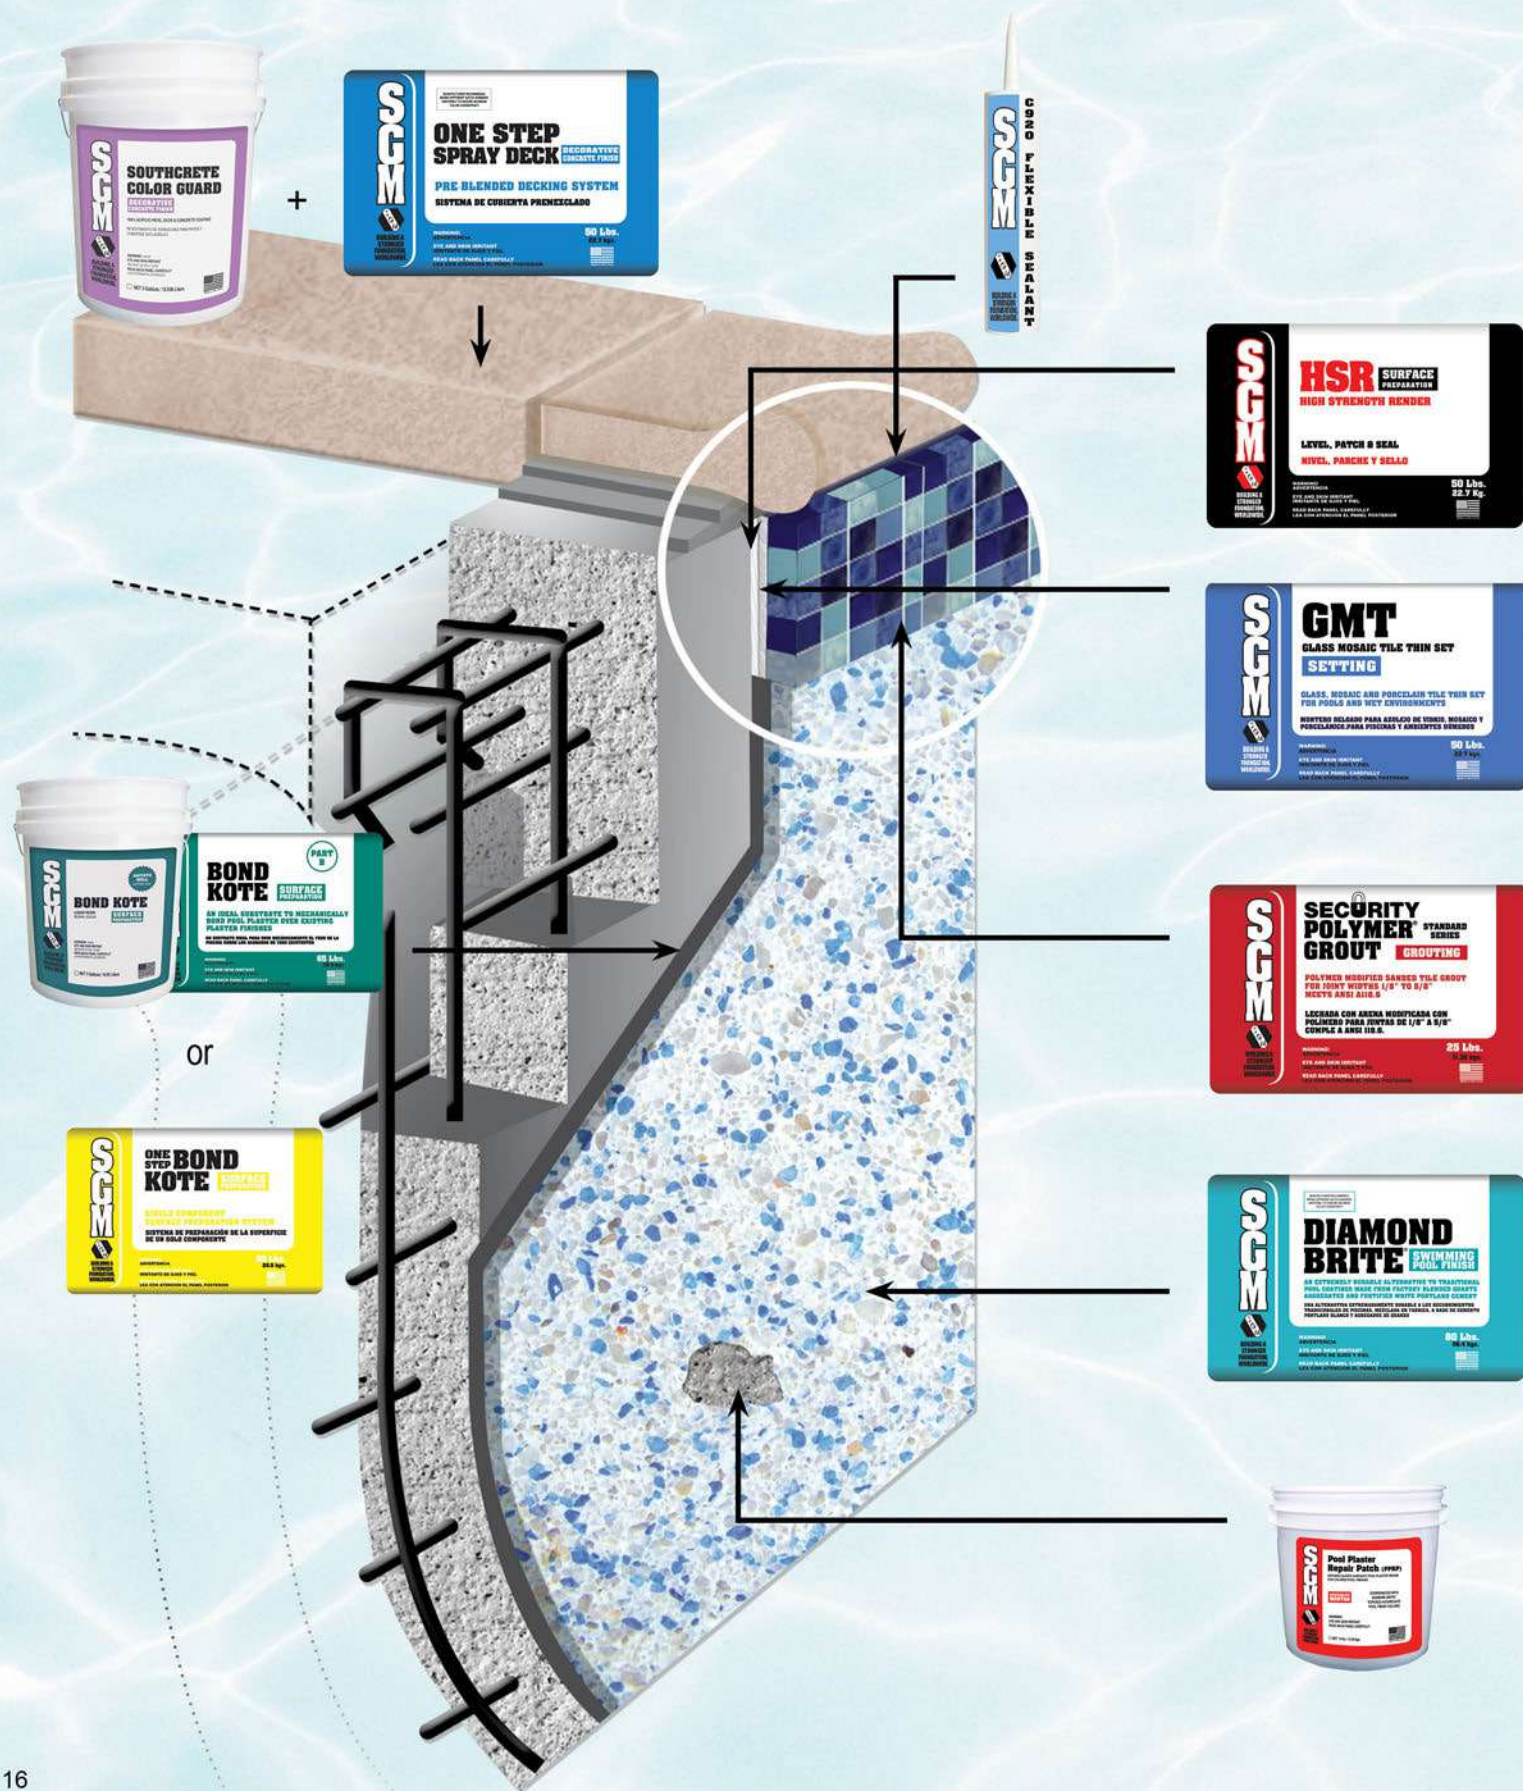

HIGH STRENGTH RENDER (HSR)

SGM's High Strength Pool Render (HSR) is a cementitious blend of proprietary admixtures and select aggregates that are factory blended to produce a consistent quality mix from batch to batch, eliminating additional costly job-site additives. Engineered to be a versatile and exceptional strength thin / thick bed render, HSR can be used for bonded and non-bonded, conventional mortar beds where additional strength is desired.

It is ideally suited for use as a render substrate for applications in wet areas (pools, spas, fountains, showers, etc.) and can be used in place of Type S or Type N mortars. It is best utilized for the following types of watertight jobs: leveling, patching, sealing, parge coats, underlayments and waterline tile prep.

GLASS MOSAIC TILE THIN-SET (GMT)

Premium Latex-Portland Cement Mortar

Glass Mosaic Tile thin set is the ultimate one-step polymer fortified thin set mortar specifically designed for outdoor and wet environments. GMT provides superior adhesion to glass, mosaic tiles, porcelain, ceramic, and natural stone.

Its' unparalleled proprietary formulation makes it the perfect choice for setting tile in swimming pools, spas, water features and other areas with submerged applications.

GMT produces an ultra-white finish that will enhance the look of glass, mosaic tiles and any translucent tile or stone. Available in gray and the original white formula, GMT can be used in both commercial and residential applications.



NEW PRODUCT!



POOL PLASTER REPAIR PATCH (PPRP)

Introducing one of SGM's newest innovations—**Pool Plaster Repair Patch (PPRP)**. This advanced blend of specialty cement and proprietary additives delivers exceptional strength and reliability for pool surface repairs.

Engineered for versatility, PPRP is formulated to cure underwater and bond securely to existing plaster, making it the ideal solution for both filled (underwater) and empty (drained) pools.

Simple and efficient, just add water and apply. Its quick-setting formula ensures fast results with minimal downtime.

Pool Plaster Repair Patch is designed to color co-ordinate with the Diamond Brite finishes shown below.



Pool Plaster Repair Patch has been tested and certified by an independent lab.

C920 FLEXIBLE SEALANT


*Strength Meets Versatility...*SGM C920 Flexible Sealant is a premium adhesive and sealant designed for superior performance and aesthetic harmony. Expertly color and texture matched to specific applications, C920 ensures a seamless finish for any project.

This high-grade, fast-curing, one-component formula offers non-sag application and exceptional adhesion, making it ideal for both indoor and outdoor environments. Engineered for durability and flexibility, C920 delivers long-lasting protection against the elements while maintaining a flawless appearance—perfect for demanding installations where strength, flexibility, and beauty matter most.

Performance Highlights:

- Multiple Substrate Adhesion
- Mold & Mildew Resistance
- Easy to Tool & Paintable
- Superior UV Protection
- Extremely Low VOC

C920 is ideal for expansion joints in residential and commercial applications for joints between coping and pool tile, coping and decking, as well as high-traffic areas.

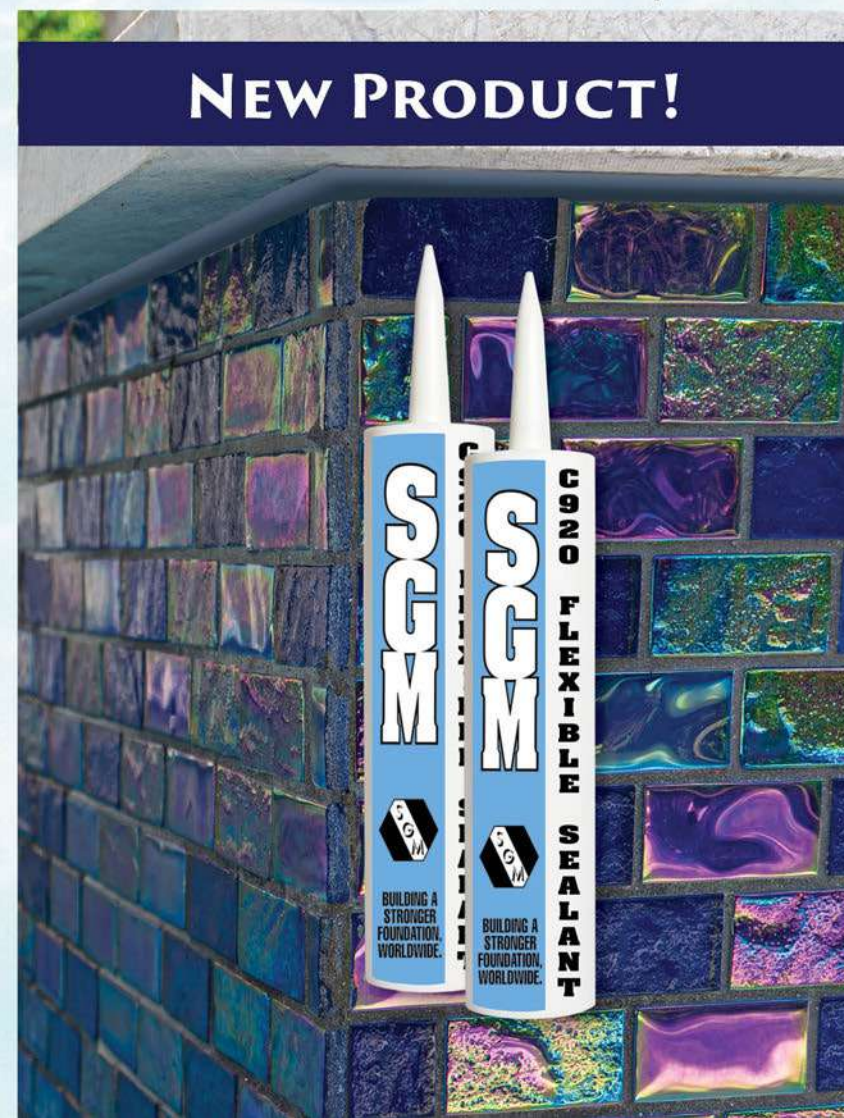

NEW PRODUCT!

A CONSUMER'S GUIDE TO SGM SWIMMING POOL SYSTEMS

Consumers today pride themselves on being savvy on all aspects of buying decisions including brand awareness, value added products and services.

To ensure you are getting the original SGM Diamond Brite or an original SGM pool finish, follow the tips below to help you in your buying process:

- 1) Check your contract.** Make sure your bid does not include open ended statements such as “exposed aggregate finish”. Avoid product substitutes by asking specifically for the SGM brand finish and color of your choice. For example: “Diamond Brite Cool Blue”.
- 2) Request a Factory Trained Applicator certificate**, which will verify their familiarity with SGM Pool finishes. It is also recommended to ask for contractor and other state backed license information with any type of contracted home improvement.
- 3) Ask bidding companies for number of bags to be applied.** For proper SGM finish coverage, visit our on-line coverage calculator. If a company comes in with a lower bid on materials it could be a sign they are not using enough material or applying an inferior brand.
- 4) Be on-site for installation.** Visually check that SGM brand products are on your job. See images of SGM products on page 16. While many competitors try match our color names and finished appearance...they fall short and cannot match our quality and formulation.
- 5) Look for batch numbers and labels.** SGM labels all products during the manufacturing process and tests all products before being sold to market. **You will need the batch numbers to register your warranty.**
- 6) Register your warranty on-line.** The warranty is held with SGM, not the applicator, so if there is an issue with our product and not the application and or maintenance, you will be covered. It is important to list all batch numbers used on your project. This may include Bond Kote product, if the application is a refinish.

FACTORY TRAINED APPLICATORS

SGM Swimming Pool, Spa & Deck finishes set the industry standards for quality and excellence in exposed aggregate finishes. Our SGM Factory Trained Applicators are experienced professionals that are carefully screened, qualified and are evaluated upon completion of the SGM course work and training.

To find and contact a FTA in your area visit: www.sgm.cc/sgm-pool-professional-locator/



SGM WARRANTIES

Registering your SGM pool is simple, protects your investment and also ensures efficient warranty service. Please fill out the warranty registration form on-line and you will receive a copy of the warranty to download and/or print.

Southern Grouts & Mortars, Inc. (here-in referred to as SGM), warrants its products Diamond Brite, River Rok, Durazzo, Spray Deck and Ultra Pearl Brite solely against material failure from the date of installation for a period of 1 year. Customers may acquire an extended 5 year commercial* or 10 year residential** by successful completion and retention of the SGM on-line warranty***.

* Commercial pools are defined as those not incorporated into single-family residences. Diamond Brite Commercial White is the only finish choice that offers a 10 year extended warranty for commercial installations.

** Durazzo, Ultra Pearl Brite and Spray Deck materials offer a 5 year warranty for any project, residential or commercial.

*** SGM Extended Warranties are valid only in the Continental United States and are non-transferable. Visit the on-line warranty page for terms & conditions, and all limitations. The on-line warranty registration must be completed within 30 days of installation to be valid.

GETTING YOUR NEW POOL OR SPA OFF TO A HEALTHY START

In developing SGM finishes, we made ease of maintenance a top priority. Please make sure to register your warranty and read carefully our INITIAL FILL and BALANCING, and OPTIMUM POOL / SPA WATER CHEMISTRY CONDITION recommendations in order to obtain a successful start-up.

In accordance with the National Plasterers Council, Inc. ("NPC") standards, it is recommended that the following pool and spa water chemistry conditions be maintained on an on-going basis for the longevity of the interior pool and spa finish. These values are important to prevent corrosion, deterioration, discoloration, scaling or other problems. For more information refer to your local agency having jurisdiction or NPC.

Follow recommended fill and balancing procedures to ensure a successful start-up. Fill the pool completely and without interruption with clean, potable water. The use of a filter during filling is strongly recommended. The initial fill water is the most important water that the pool will receive and must be tested, recorded and adjusted according to the following parameters by an experienced pool professional. For the first thirty days (30) the pH and alkalinity must be monitored and adjusted (if applicable) every three (3) to five (5) days. All other chemicals monitored and adjusted (if applicable) every seven (7) to ten (10) days. The pool water must be tested regularly and documented monthly by a reputable company using a computerized system. Monitoring the pool water regularly will not only affect the new finish but will keep it looking like new. Improper water chemistry will void the limited residential / commercial warranty. It is recommended that a quality sequestering agent be used in the initial start-up in accordance with the manufacturer's instructions and then a recommended maintenance dosage per the sequestering agent's manufacturer instructions.

START UP CHEMISTRY RECOMMENDATIONS

First Day: Add sequestering agent upon initial fill per manufacturer's instructions. Adjust pH to 7.2 - 7.6 and total alkalinity to 80 -120 PPM. Dissolve chemicals completely in water and disperse throughout pool.

Second Day: Record pH, total alkalinity, calcium hardness and temperature levels. Adjust pH to 7.4 - 7.6 and total alkalinity to 80-120 PPM. Dissolve all chemicals completely in water before adding to pool, and allow sufficient time for each chemical to be fully dispersed before adding other chemicals. **DO NOT ADD CHLORINE.** Brush the entire pool twice daily for the first three days.

Third Day: Repeat steps from Second Day. Adjust chemistry to the following levels: Free Chlorine: 1.0 - 3.0 PPM / pH: 7.4 -7.6 / Total Alkalinity: 80 -120 PPM / Calcium Hardness: 200 - 400 PPM / Stabilizer: 30 - 60 PPM.

Adjust circulating pump timer to normal operating hours. Brush the pool walls and floor daily for the first two (2) weeks. Do not vacuum pool with wheeled vacuum for 14 days. Do not install an automatic pool cleaner for 28 days. Please make sure the water pH and alkalinity is balanced prior to use salt chlorine generators.

DAILY WATER CHEMISTRY AFTER 28 DAYS	
Description	Pool & Spa Water Levels
Free Chlorine: <i>Above 4.0 PPM may cause corrosion</i>	1.0 - 3.0 PPM
Total Chlorine:	1.0 - 3.0 PPM
pH:	7.4 - 7.6
Total Alkalinity:	80 - 120 PPM
Calcium Hardness:	200 - 400 PPM (200 is ideal)
Cyanuric Acid:	50 - 80 PPM
TDS:	300 - 1800 PPM (Non-Salt Pools)
Salt Level:	2500 - 3500 PPM (Salt Chlorination ONLY)

Maintain the water chemistry using the Langelier Saturation Index (LSI) maintained between 0.0 and +0.3. Test pool chemistry at weekly intervals and adjust as needed to maintain recommended levels (see chart above).

Important Note: these suggested guidelines are based on nationally recognized start-up procedures and feedback from our customers throughout the nation. They represent an average of what has worked best for the majority and does not guarantee you will not experience common plaster phenomenon such as staining, mottling, efflorescence and scale. Water supplies vary from one municipality to the next and therefore common sense, experience and good testing procedures must be followed.

SGM advises architects, engineers and contractors to visit our web site at www.sgm.cc for access to installation instructions, information sheets and technical documents for our products. SGM understands the importance of having qualified knowledgeable technical support and customer care, so if you have further questions on SGM products, **Customer Service and Technical Assistance** are just a phone call away at **800.641.9247**.

To view additional photographs of poolscape in Diamond Brite, Diamond Brite Watercolors, Diamond Brite Jewels, River Rok and Durazzo please visit www.sgm.cc/pool-gallery/



Photo Courtesy of Golden Sea Outdoors, FL - Steel Blue



Proud Sponsor of



SGM

Corporate Headquarters Office
1502 SW 2nd Place
Pompano Beach, FL 33069
1.800.641.9247 www.sgm.cc

SGM Plant City
3303 State Road 574 West
Plant City, FL 33563
1.800.536.2873

SGM Texas
3711 N. Highway 77
Waxahachie, TX 75165
972.576.2288

