



CLUM212S, CLUM215S // 120cm & 150cm // SILENT



// CLUM212S (120cm)



The CLUM212S and CLUM215S undermount rangehood rangehoods boast innovative design and durability. Constructed with high grade 304 stainless steel, these silent alfresco rangehoods are designed for outdoor and under-cover patio use.

Their sleek design integrate seamlessly into overhead cabinetry and come with sensitive touch buttons, remote control and 10-minute auto-shutoff function. There are 4 speed levels powered by the Isodrive® motor system for swift and silent extraction of heavy smoke and airborne grease from any Australian barbecue.



// CLUM215S (150cm)

PRODUCT DESCRIPTION

- quality 304 grade stainless steel
- silent Isodrive® motor
- 4 speed touch sensitive controls, with remote
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffles
- 5 Year rangehood Warranty

TECHNICAL DATA



- **CLUM12S** dimensions: (W x D) 1200 x 500 mm, 3 x baffle, 2 x LED lights
- **CLUM15S** dimensions: (W x D) 1500 x 500 mm, 4 x baffles, 4 x LED lights

ISODRIVE® OPTIONS

- **SP2** twin external motor
 - 3000 m³/h airflow
 - 200mm SteelFlex™ ducting (2 x 6m)
 - install roof/wall
 - rated power: 310W
- **SE** single external motor
 - 3200 m³/h airflow
 - 250mm SteelFlex™ ducting (4m)
 - 200mm SteelFlex™ ducting (2m)
 - SE accessory kit required
 - install roof/wall
 - rated power: 137W
- **SE2** Twin external motor
 - 5000 m³/h airflow
 - 2 x 250mm SteelFlex™ ducting (4m)
 - 2x 200mm SteelFlex™ ducting (2m)
 - 2 x 200-250mm reducer
 - install roof/wall
 - rated power: 274W



CLUM212S, CLUM215S // 120cm & 150cm // SILENT

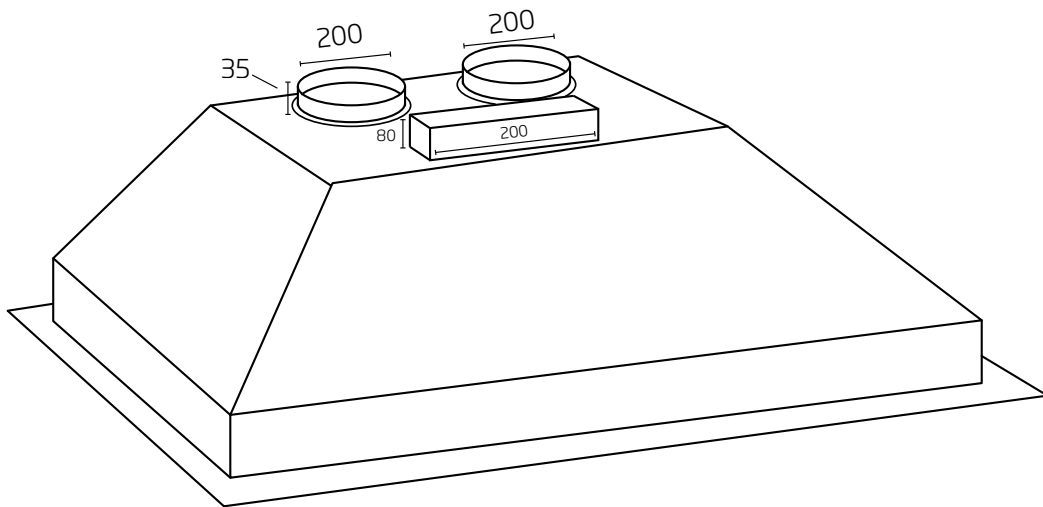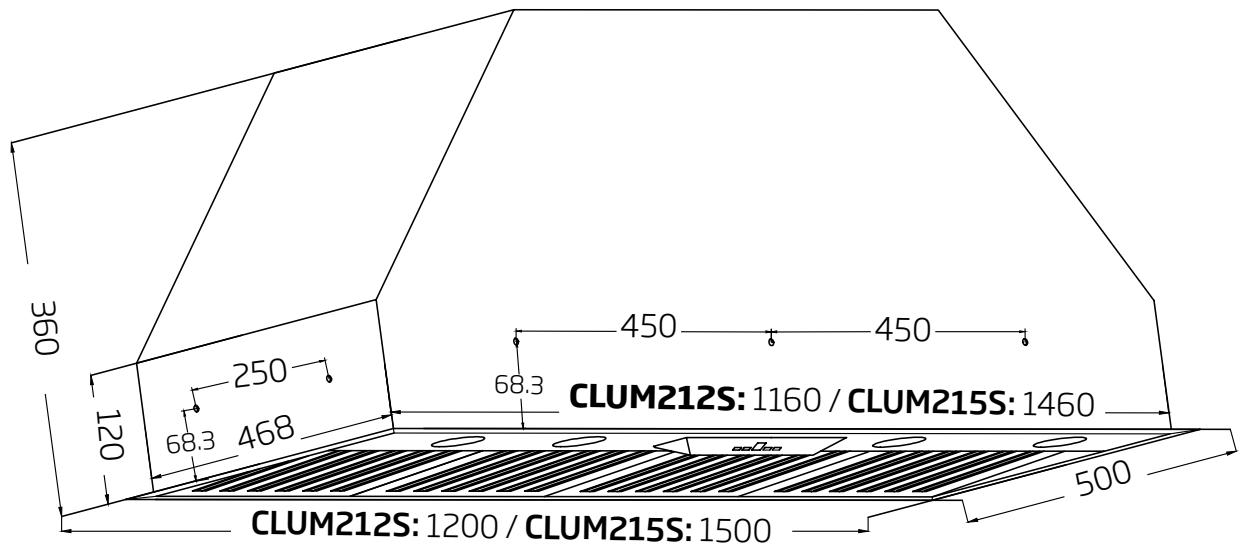

NOTE: Filter and light quantity may vary from model to model.

Model: CLUM212S, CLUM215S
Feeding Voltage: 220-240V 50Hz
Max Lamp Power: CLUM212S: 2 x 3 W / CLUM215S: 4 x 3W
ILCOS Code: DRR-3-H-GU10-51/55