



## CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // SILENT



// CL8912S (120cm)



The CL8912S or CL8915S wallmount rangehood comes with silent air extraction from the Isodrive® motor system. It is constructed with the highest quality stainless steel and designed to withstand the harsh Australian environment.

The pyramid design ensures a large extraction zone to effectively capture smoke and airborne grease over any barbecue via 4-speed touch, remote control and 10-minute auto-shutoff function.



// CL8915S (150 cm, stainless steel) and CL8915BS (150 cm, matte black)



// CL8912BS (120 cm, matte black) and CL8912S (120 cm, stainless steel)

### PRODUCT DESCRIPTION

- quality 304 grade stainless steel and matte black available
- silent Isodrive® motor
- 4 speed touch sensitive controls, with remote
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffles
- 5 Year rangehood Warranty

### ISODRIVE® OPTIONS


- **SP2** twin external motor
  - 3000 m<sup>3</sup>/h airflow
  - 200mm SteelFlex™ ducting (2 x 6m)
  - install roof/wall
  - rated power: 310W
- **SE** single external motor
  - 3200 m<sup>3</sup>/h airflow
  - 250mm SteelFlex™ ducting (4m)
  - 200mm SteelFlex™ ducting (2m)
  - SE accessory kit required
  - install roof/wall
  - rated power: 137W
- **SE2** Twin external motor
  - 5000 m<sup>3</sup>/h airflow
  - 2 x 250mm SteelFlex™ ducting (4m)
  - 2 x 200mm SteelFlex™ ducting (2m)
  - 2 x 200-250mm reducer
  - install roof/wall
  - rated power: 274W

### TECHNICAL DATA

- **CL8912S** dimensions: (W x D) 1200 x 800 mm, 6 x baffles, 4 x LED lights
- **CL8915S** dimensions: (W x D) 1500 x 800 mm, 8 x baffles, 4 x LED lights



**CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // SILENT**

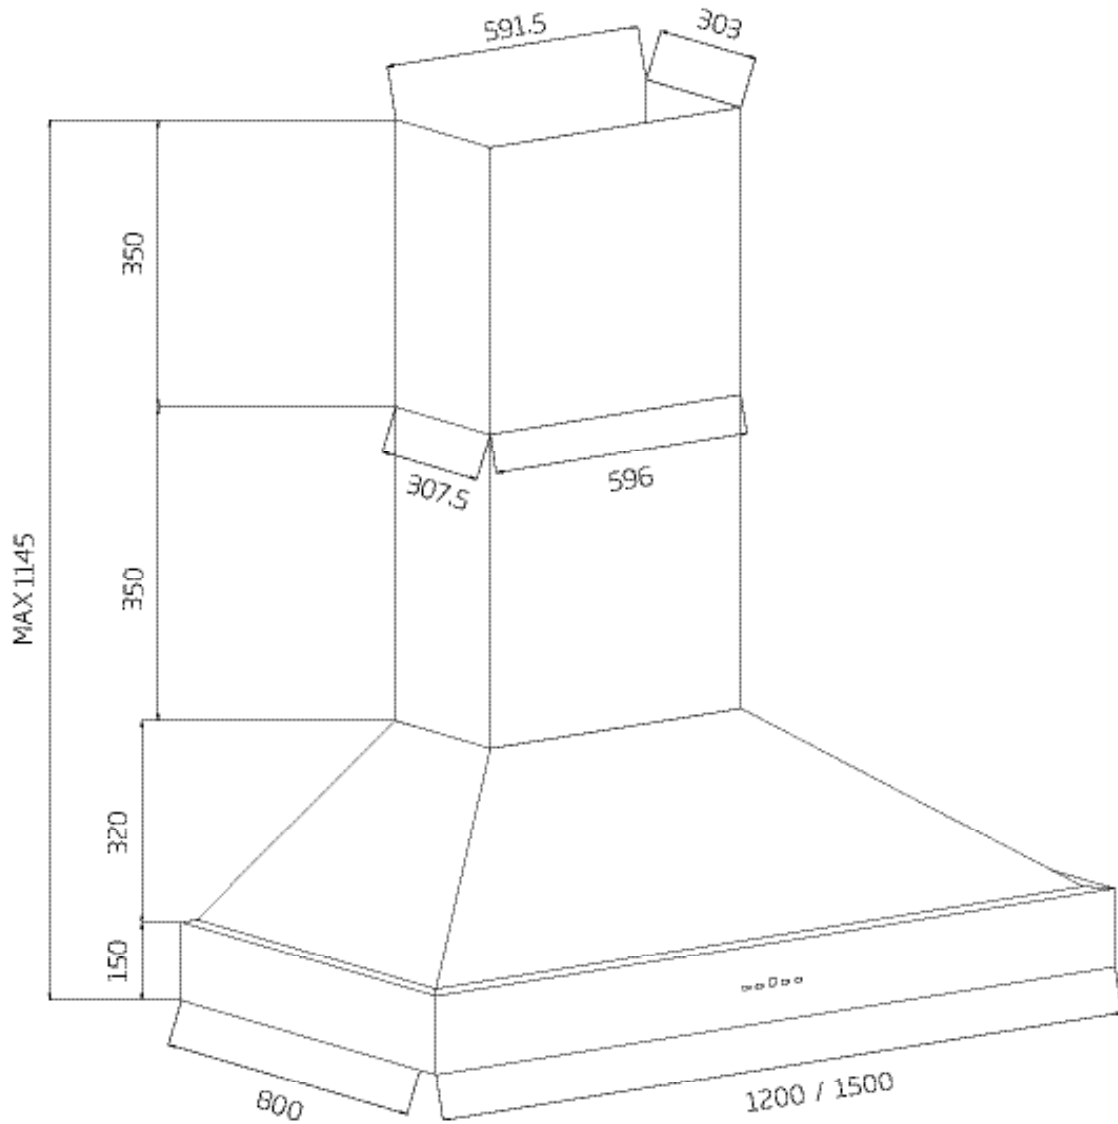

**Model:** CL8912S, CL8912BS, CL8915S, CL8915BS

**Feeding Voltage:** 220-240V 50Hz

**Max Lamp Power:** 4 x 3W

**ILCOS Code:** DRR-3-H-GU10-51/55