



## CL7372S, CL7375S, CL7372BS, CL7375BS // 120cm & 150cm // SILENT



// CL7372BS (120cm)



These BBQ wallmount rangehood represents the best of durability and excellence for your alfresco cooking environment.

Constructed with high grade 304 stainless steel, this stately BBQ wallmount rangehood makes a dramatic design statement with clean, geometric lines. It is powered by Schweigen's German-engineered Isodrive® motor technology to deal with smoke, odours and airborne grease from high-intensity cooking swiftly and silently.



// CL7372S (120 cm, stainless steel) and CL7372BS (120 cm, matte black)



// CL7375BS (150 cm, matte black) and CL7375S (150 cm, stainless steel)

### PRODUCT DESCRIPTION

- quality 304 grade stainless steel and matte black available
- silent Isodrive® motor
- 4 speed touch sensitive controls, with remote
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffles
- 5 Year rangehood Warranty

### TECHNICAL DATA


- **CL7372S** dimensions: (W x D) 1200 x 800 mm, 6 x baffles, 4 x LED lights
- **CL7375S** dimensions: (W x D) 1500 x 800 mm, 8 x baffles, 4 x LED lights

### ISODRIVE® OPTIONS

- **SP2** twin external motor
  - 3000 m<sup>3</sup>/h airflow
  - 200mm SteelFlex™ ducting (2 x 6m)
  - install roof/wall
  - rated power: 310W
- **SE** single external motor
  - 3200 m<sup>3</sup>/h airflow
  - 250mm SteelFlex™ ducting (4m)
  - 200mm SteelFlex™ ducting (2m)
  - SE accessory kit required
  - install roof/wall
  - rated power: 137W
- **SE2** Twin external motor
  - 5000 m<sup>3</sup>/h airflow
  - 2 x 250mm SteelFlex™ ducting (4m)
  - 2x 200mm SteelFlex™ ducting (2m)
  - 2 x 200-250mm reducer
  - install roof/wall
  - rated power: 274W



**CL7372S, CL7375S, CL7372BS, CL7375BS // 120cm & 150cm // SILENT**

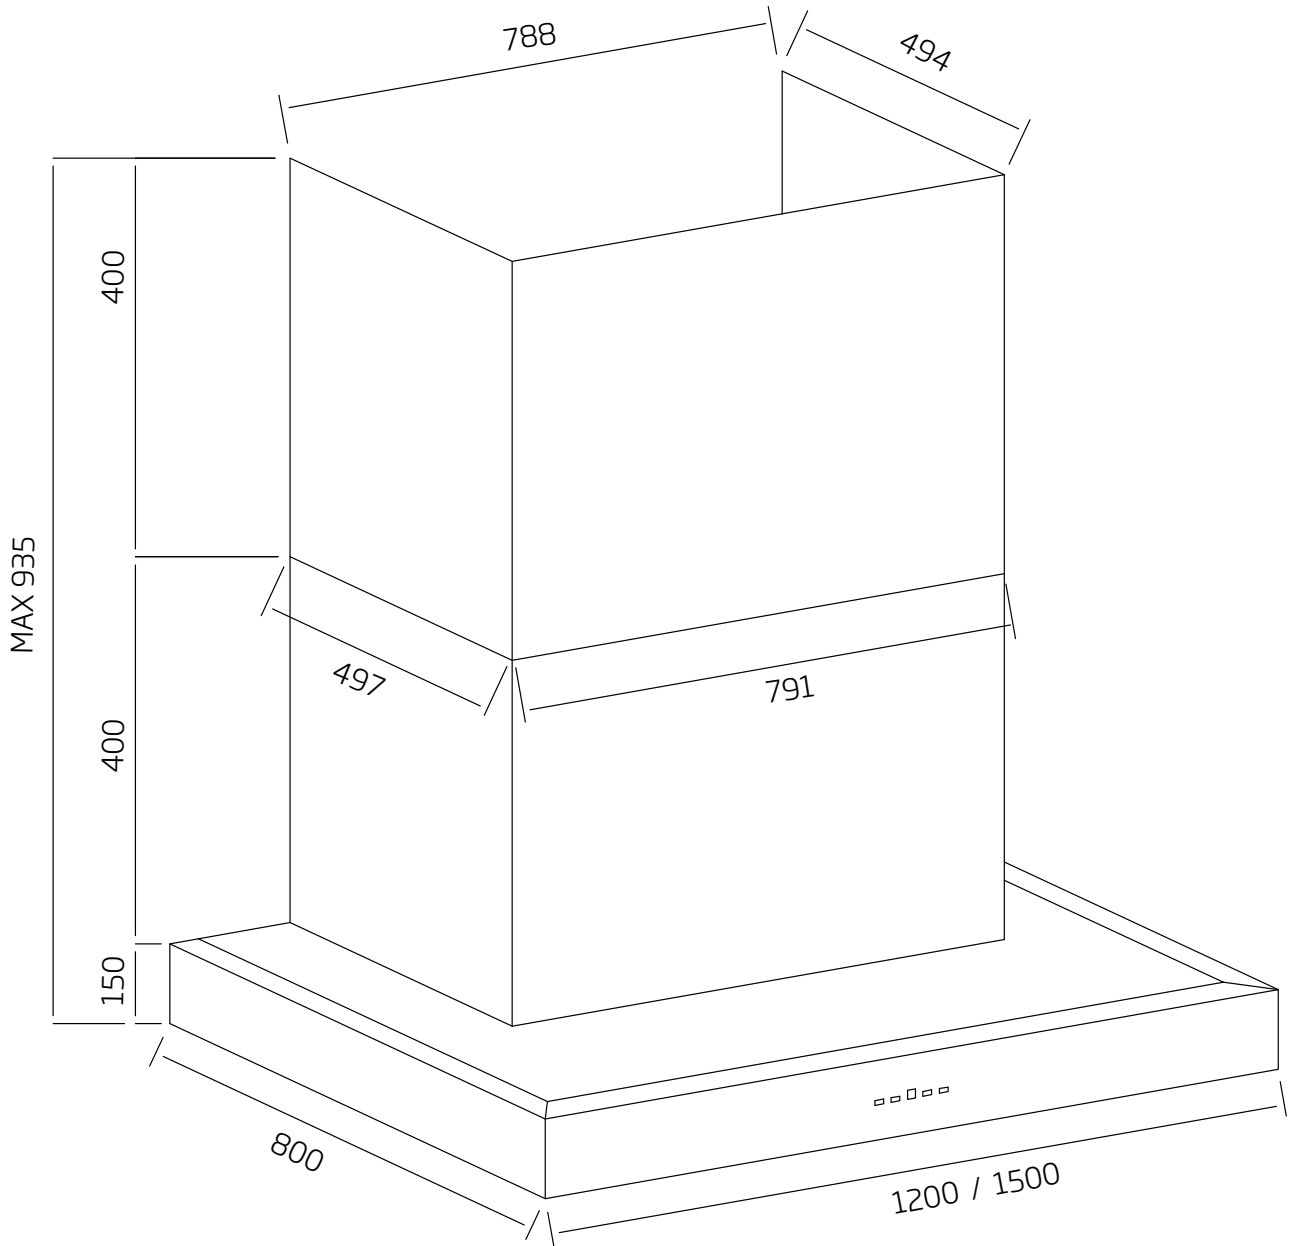

**Model:** CL7372S, CL7372BS, CL7375S, CL7375BS

**Feeding Voltage:** 220-240V 50Hz

**Max Lamp Power:** 4 x 3W

**ILCOS Code:** DRR-3-H-GU10-51/55