SCHWEIGEN PROVENT™ // BAL40-FLM150-300 // ø150 - 300mm // BAL FLASH KITS - METAL ROOFS



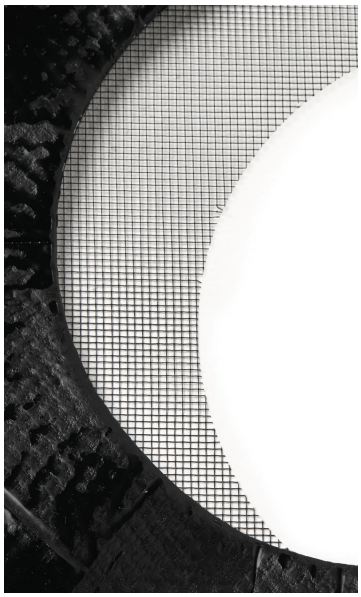

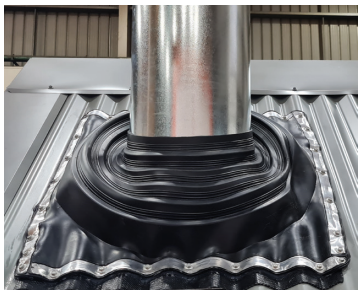

WHY CHOOSE OUR BAL-RATED ROOF KITS?

- **Comprehensive Roofline Protection** - Designed to accommodate a wide range of roof pipe penetrations and sizes, delivering complete coverage for compliant installations in bushfire-prone areas.
- **Tested & Certified for Australian Conditions** - Fully compliant with AS1530.8.1-2018 and rigorously tested with the CSIRO to meet the latest Australian bushfire performance requirements.
- **Installer-Friendly Design -** Thoughtfully engineered for ease and speed on-site, helping installers achieve a neat, compliant finish with minimal fuss.
- **BAL 40 Ready for Metal Roofs** - Suitable for applications up to BAL 40 on metal roofs – simply pair with the appropriate pipe to complete the system.
- **Watertight, Long-Term Confidence -** The flexible base forms a secure, watertight seal across most roof profiles and pitches, supporting long-lasting protection and performance.
- **Built for Harsh Aussie Conditions** - With integrated ozone and UV protection, these kits are made to endure Australia's climate, providing added safety and peace of mind with every installation.

CATEGORY	DETAIL
Model	BAL40-FLM150-300
Type	BAL Flash Kits – Metal Roofs
Application	Used for external motors or vents with 200mm ducting
Roof profile	Installed on all colorbond or metal roofs
Connection	Cut to size: 150 - 300mm Metal Pipe and Ducting
Compliance	AS1530.8.1-2018 / CSIRO BAL-40 Certified
Installation:	This is a Trade-Only product and should only be installed by a licenced professional.

Bushfire Attack Level (BAL) ratings indicate a home's exposure to ember attack, radiant heat and direct flame during a bushfire. Expressed in kilowatts per square metre (kW/m²), they're a critical benchmark for ensuring buildings in bushfire-prone areas are designed to withstand extreme conditions.

Developed in partnership with Aztec and purpose-designed for the Schweigen Silent Isodrive® motor, our BAL-rated Roof Flashing System delivers a robust, bushfire-conscious penetration solution at the roofline. After more than three years of development, rigorous CSIRO testing and ongoing refinement, this system now meets all requirements for bushfire-rated zones up to BAL 40, is CSIRO certified, and is fully compliant with the latest Australian Standard AS1530.8.1-2018. The result is a secure, watertight and bushfire-resilient installation in high-risk areas – so homeowners can enjoy powerful, Silent extraction with added protection and peace of mind.