



DSPA 8-2

DESCRIPTION:

RED-COATED STEEL CYLINDRICAL HOUSING WITH **AXIAL DISCHARGE** OUTLET.
COMPLIANT WITH NFPA 2010, EN15276-2 AND ISO15779 GUIDELINES.

MODEL

8-2

PART NUMBER

100010

UNIT DIMENSIONS

Ø220 x 360 mm (EXCL. BRACKET)

TOTAL WEIGHT (EXCL. BRACKET)

20900 g (±2%)

BRACKET WEIGHT

1508 g

COMPOUND WEIGHT

6900 g

VOLUME COVERAGE A(CW) +30% SAFETY

65,24 m³

DISCHARGE TIME

140 s

ACTIVATION, CURRENT

SCREW-IN ELECTRICAL STARTER, 1.5–32 V DC / 0.8 A,
THERMO-MECHANICAL

OPERATING CONDITIONS

-40°C TO 75°C / UP TO 95% RH


COLOUR

STANDARD RAL 3000,
OTHER COLOURS UPON REQUEST


MIN. DISTANCE FOR PERSONS
(75°C) FROM DISCHARGE OUTLET

MIN. DISTANCE FOR COMBUSTIBLE MATERIAL
(200°C) FROM DISCHARGE OUTLET


MIN. DISTANCE FOR CONSTRUCTION
STRUCTURES (400°C) FROM DISCHARGE OUTLET

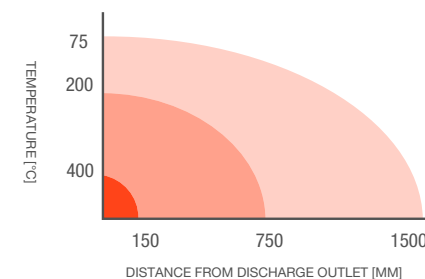


FRONT VIEW

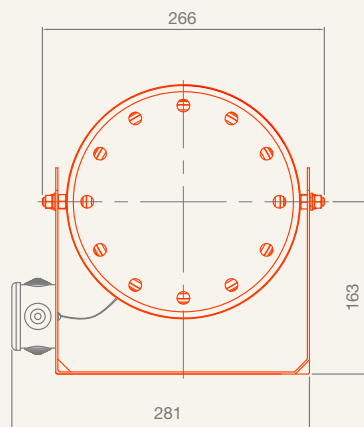

BOTTOM VIEW

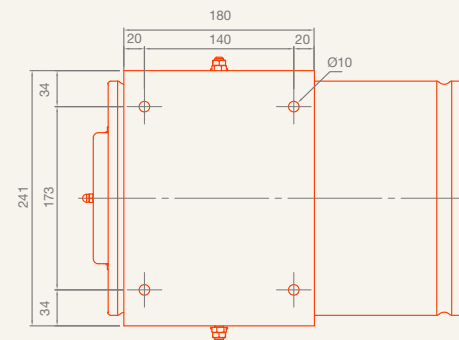

SIDE VIEW

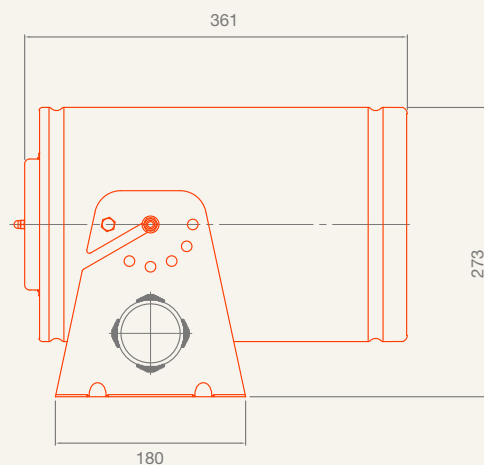

• ALL DIMENSIONS IN mm

• UNLESS OTHERWISE SPECIFIED, TOLERANCES ACCORDING TO ISO 2768-V.

• ELECTRICAL STARTER CABLE LENGTH: 440 mm