



DSPA 11-4

DESCRIPTION:

RED-COATED STEEL DISK HOUSING WITH **RADIAL DISCHARGE** AND DOUBLE-SHAPED PLATE DESIGN. COMPLIANT WITH EN15276, ISO15779, AND NFPA 2010 GUIDELINES, WITH A DISCHARGE TIME OF <60 S IN COMPLIANCE WITH UL 2775 REQUIREMENTS.

MODEL

11-4

PART NUMBER

100014 (E) / 100064 (T)

UNIT DIMENSIONS

Ø165 x 72 mm (EXCL. BRACKET)

TOTAL WEIGHT

2200 g (±2%)

COMPOUND WEIGHT

900 g

VOLUME COVERAGE A(CW) +30% SAFETY

8,76 m³

DISCHARGE TIME

19-31 s

ACTIVATION, CURRENT

BUILT-IN ELECTRICAL STARTER, 1.5–32 V DC / 0.8 A (E)
OR THERMOCORD (T)

OPERATING CONDITIONS

-40 °C TO 75 °C / UP TO 95% RH


COLOUR


STANDARD RAL 3000,
OTHER COLOURS UPON REQUEST

MIN. DISTANCE FOR PERSONS
(75°C) FROM DISCHARGE OUTLET

MIN. DISTANCE FOR COMBUSTIBLE MATERIAL
(200°C) FROM DISCHARGE OUTLET

MIN. DISTANCE FOR CONSTRUCTION
STRUCTURES (400°C) FROM DISCHARGE OUTLET

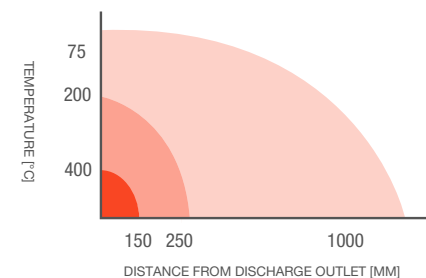

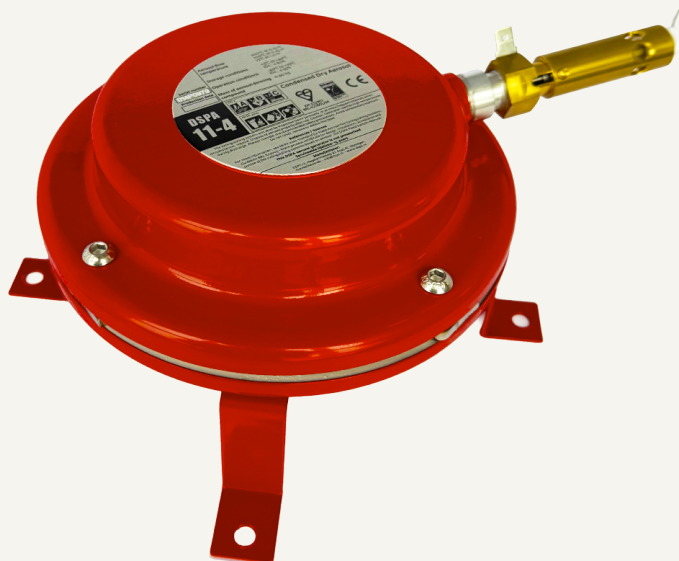

DSPA 11-4 (B)

DESCRIPTION:

RED-COATED STEEL DISK HOUSING WITH **RADIAL DISCHARGE** AND DOUBLE-SHAPED PLATE DESIGN. COMPLIANT WITH EN15276, ISO15779, AND NFPA 2010 GUIDELINES, WITH A DISCHARGE TIME OF <60 S IN COMPLIANCE WITH UL 2775 REQUIREMENTS.

MODEL

11-4 (B)

PART NUMBER

100094

UNIT DIMENSIONS

Ø165 x 72 mm (EXCL. BRACKET)

TOTAL WEIGHT

2200 g (±2%)

COMPOUND WEIGHT

900 g

VOLUME COVERAGE A(CW) +30% SAFETY

8,76 m³

DISCHARGE TIME

19-31 s

ACTIVATION, CURRENT

BULB STARTING DEVICE (BSD),
THERMO-MECHANICAL

OPERATING CONDITIONS

-40 °C TO 75 °C / UP TO 95% RH


COLOUR

STANDARD RAL 3000,
OTHER COLOURS UPON REQUEST


MIN. DISTANCE FOR PERSONS
(75°C) FROM DISCHARGE OUTLET

MIN. DISTANCE FOR COMBUSTIBLE MATERIAL
(200°C) FROM DISCHARGE OUTLET


MIN. DISTANCE FOR CONSTRUCTION
STRUCTURES (400°C) FROM DISCHARGE OUTLET

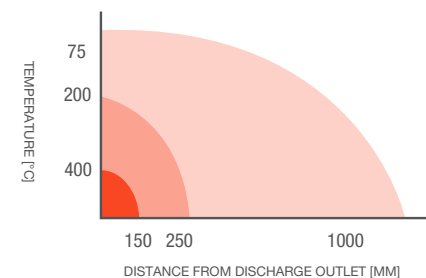

TOP VIEW

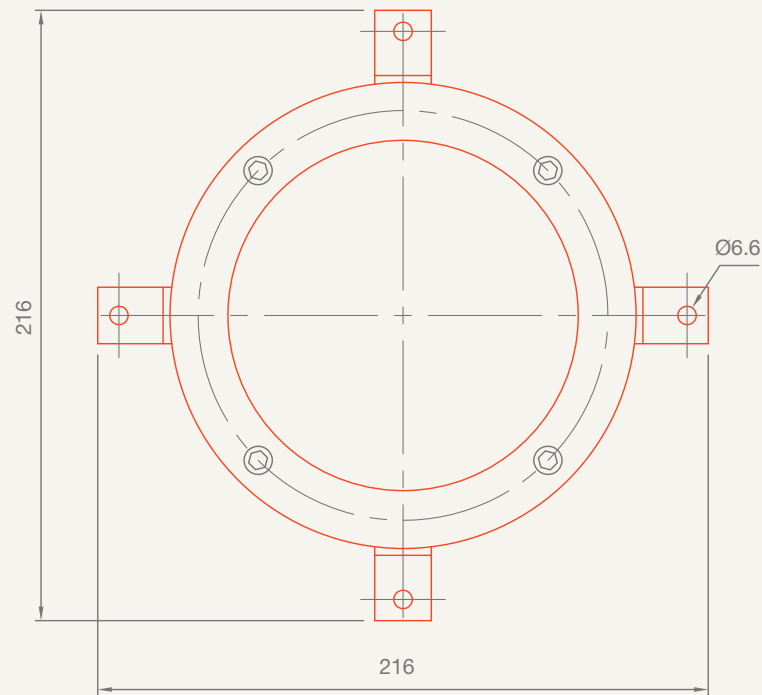

FRONT VIEW

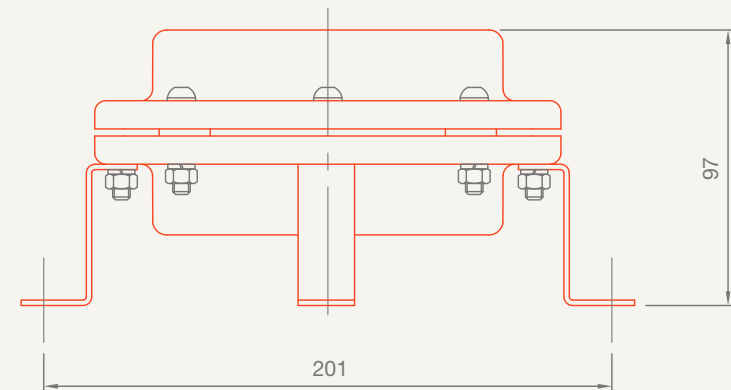

CABLE LENGTH MEASURED FROM THE HOUSING:

- THERMOCORD STARTER CABLE LENGTH: 400-450 mm
- ELECTRICAL STARTER CABLE LENGTH: 350 mm

- ALL DIMENSIONS IN mm
- UNLESS OTHERWISE SPECIFIED, TOLERANCES ACCORDING TO ISO 2768-V.

DSPA B.V.
INFO@DSPA.NL
WWW.DSPA.NL

PLATINAWERF 10,
6641 TL BEUNINGEN,
THE NETHERLANDS

