



20S

FIRE SKID



TANK: 20 GALLONS | DRY WEIGHT: 58 LBS. | WET WEIGHT: 225 LBS.

The QTAC™ 20S is the smallest offering in the QTAC line-up and has been recently redesigned. This compact QTAC was designed primarily for prescribed burning and mop-up, giving you the capability to spray a stream of water in even the most remote areas. The 20S features a 20 gallon, baffled, and welded-copolymer tank and a pump with a 1-horsepower Honda engine. Given its lightweight and highly portable rugged design, the 20S can go and be used just about anywhere.

DESIGNED FOR:

☒ FIREFIGHTING ☐ FIRE-RESCUE ☐ RESCUE

THE 20S ADVANTAGE:

- ☐ Can be mounted on a 4-wheel ATV
- ☐ Easily lifted by one person when dry
- ☐ Can access remote areas unreachable by larger vehicles

KEEP THE 20S ON HAND FOR:

- ☐ Small-scale prescribed burn control
- ☐ Spot-fire suppression
- ☐ Grass fire prevention
- ☐ Chainsaw work standby
- ☐ Weed cutting standby

QUICK SPECS:

- ☐ **Capacity:** 20 gallons
- ☐ **Engine:** Honda GX25 1.0hp
- ☐ **Pump:** Koshin SEH-25L, Max 30 GPM, 46 PSI
- ☐ **Hose Rack:** With 50' of 5/8" rubber booster hose

LEARN MORE AT [QTACFIRE.COM](https://qtacfire.com)

SPECIFICATIONS

TANK

The tank shall have the following characteristics:

- MTECH PolyTough™ extrusion-welded Copolymer Polypropylene construction
- Capacity of 20 gallons of water
- 3/8" internal baffles with an interlocking design to meet NFPA standards
- Pump suction plumbed to the center of the tank with anti-cavitation device
- 1-1/2" tank drain
- Threaded 6" fill well, flush mounted at top of tank
- Tank vent
- Site tube to gauge water level
- Tie down points and flange-mounted anchor points to secure the skid unit
- Integral hose rack

PUMP & ENGINE

The pump system shall have the following characteristics:

- Honda GX25 1.0hp engine with recoil start and Koshin SEH-25L, Max 30 GPM, 46 PSI self-priming centrifugal pump
- 1" auxiliary suction
- 5/8" to hose rack
- 1" tank to pump
- Cooling return so that discharge can be completely stopped without creating a risk of pump overheating
- All plumbing to be of either composite polypropylene, brass or stainless steel

LEARN MORE AT [QTACFIRE.COM](https://qtacfire.com)

SPECIFICATIONS

HOSE & ASSOCIATED COMPONENTS

The hose and associated hardware shall have the following characteristics:

- 5/8" x 50' of rubber booster hose
 - 1/4-turn end-of-line shut-off
 - Brass adjustable combination nozzle
-

OPTIONS

The optional accessories include:

- Draft hose kit
-

WEIGHT

- Dry weight: 58 lbs.
- Wet weight: 225 lbs.




*All weights are approximate

LEARN MORE AT [QTACFIRE.COM](https://qtacfire.com)

DIMENSIONS

QTAC 20S Overall Dimensions

Parameter	Measurement
Width:	38"
Depth (overall):	15 1/2"
Height (overall max):	23 1/8"
Height (to top of tank):	11 3/4"

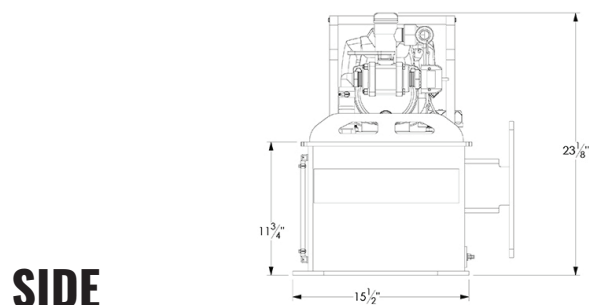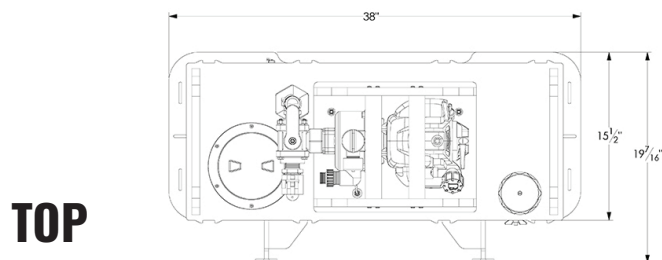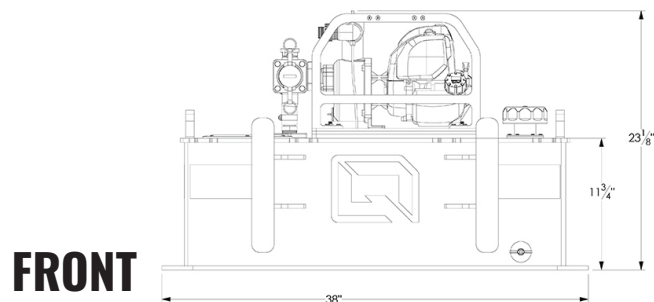

LEARN MORE AT [QTACFIRE.COM](https://qtacfire.com)