

B.

Retreat

We all seek that third place away from the monotony of everyday life, a space to unwind, and feel free. As we look to our homes again as a reclaimed sanctuary, our safe place, we invite the raw tactility and healing energy of nature into our floorscapes. Each step is a step forward, it's time to release and restore.


Extended Specifications

Type of Installation	Rigid Board Click
Application	Heavy Residential
Overall Thickness	5mm
Total Mass	8160 g/m²
Wear Layer	0.3mm
Plank Size	1212.85mm x 177.8mm (l x w)
Backing Type	Solid Bac + 1mm IXPE
Quantity per Box	2.156m²
Number of Planks	10 Planks Per Box
Fire Resistance	Bfl-s1 (EN 13501-1)
Resistance To Staining	Group 1 + 2: Grade 5 / Group 3: Grade 4 (EN 438-2)
Micro Scratch Resistance	≤ MSR-A2 / ≤ MSR-B2 (EN 16094)
Slip Resistance	DS (EN 13893)

VOC Emissions	Pass - IAC Gold Certified
Effect Of Furniture Leg	No Visible Damage (EN 424)
Thermal Resistance	0,056 (m²*K)/W (EN 12664)
Thermal Conductivity	0,090 (W/m*K) (EN 12664)
Electrostatic Propensity (Body Voltage Test)	0,2 kV Method A (EN 1815)
Dimensional Stability	≤ 0,25 % (EN ISO 23999)
Sound Insulation	17 dB (EN ISO 10140)
Locking Strength	Short Side: ≥ 3,5 kN/m / Long Side: ≥ 2,0 kN/m (ISO 24334)
Underfloor Heating	Yes, max. 27°C
Warranty	15 Year Residential Warranty
Sustainability	Floorscore



B.

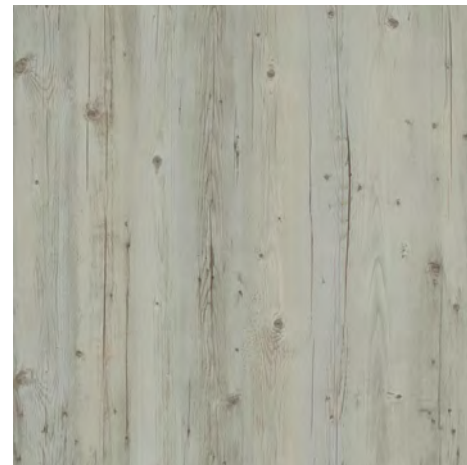


Beach Shack



Bush Bungalow



Charred Larch Cabin

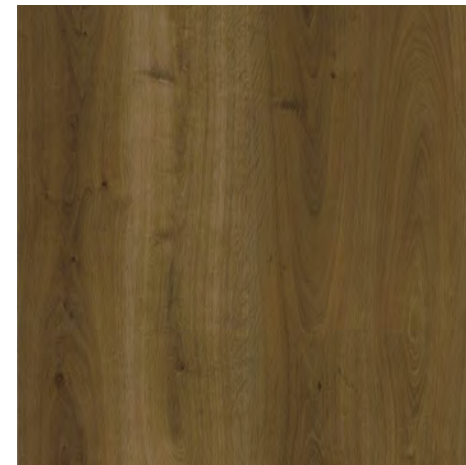

Forest Camp



Hygge Hideaway




Rustic Retreat




Scandi Sanctuary


Retreat



Heavy Residential



Suitable for Staircases



Underfloor Heating



Solid Bac



Natural Look



CERTIFIED BY SCS Global Services



Bill of Quantities

- Belgotex Retreat $\pm 5\text{mm}$ (total thickness) heavy residential/light commercial Solid Bac HDC rigid board click LVT, including 1mm IXPE backing.
- $1212.85 \times 177.8\text{mm}$ (l x w) with 0.3mm wear layer.
- 15 year residential warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.