

B.

IQ Granit Safe-T

Tread Confidently

IQ Granit Safe-T is a robust flooring solution designed for heavy-traffic wet areas where safety is paramount. It ensures a secure grip for bare feet, minimizing the risk of slipping even in soapy, wet conditions. The Safety Clean XP surface treatment offers superior stain resistance and simplifies maintenance, keeping the floor spotless with ease.

Extended Specifications

Type of Installation:	Fully Flexible Static non-directional safety vinyl sheeting with Safety clean XP
Use Classification: (EN 1307)	Heavy Commercial
Total Weight: (ISO 23997)	2950 (g/m²) 87.00 (oz/yd²)
Total Thickness: (ISO 24346)	2.0 (mm) 0.07 (in)
Roll Size:(l x w)	25 × 2 (m) 984.25 × 78.74 (in)
Backing Type:	Homogenous Vinyl Floor Covering
Chemical Resistance: (EN ISO 26987)	Good Resistance
Fire Classification: (EN 13501-1)	Bfl-s1
Slip Resistance: (DIN 51130)	R10
Residual Indentation: (EN ISO 24343-1)	<0.10mm



B.

Extended Specifications

Thermal Resistance: (ISO 10456)	0.01m² K/W
Electrostatic Propensity: (Body Voltage Test) (EN 1815 Method A)	≤2.0kV
Dimensional Stability: (EN ISO 23999)	≤0.40% for rolls
Colour Fastness: (ISO 105-B02)	≥7
Seam Strength: (EN 684)	Individual values ≥ 400N/50mm
Castor Chair Suitability: (EN ISO 4918)	Suitable
Dynamic Coefficient of Friction:	n/a
Floor Heating System:	Yes, max 27°C
VOC Emissions: (EN 16516)	Platinum (≤10 µg/m³)
Bacterial Resistance: (ISO 26987)	Does not promote growth
Warranty:	20 years
Sustainability:	Floorscore




B.



Safe-T Grey 0503

IQ Granit Safe-T

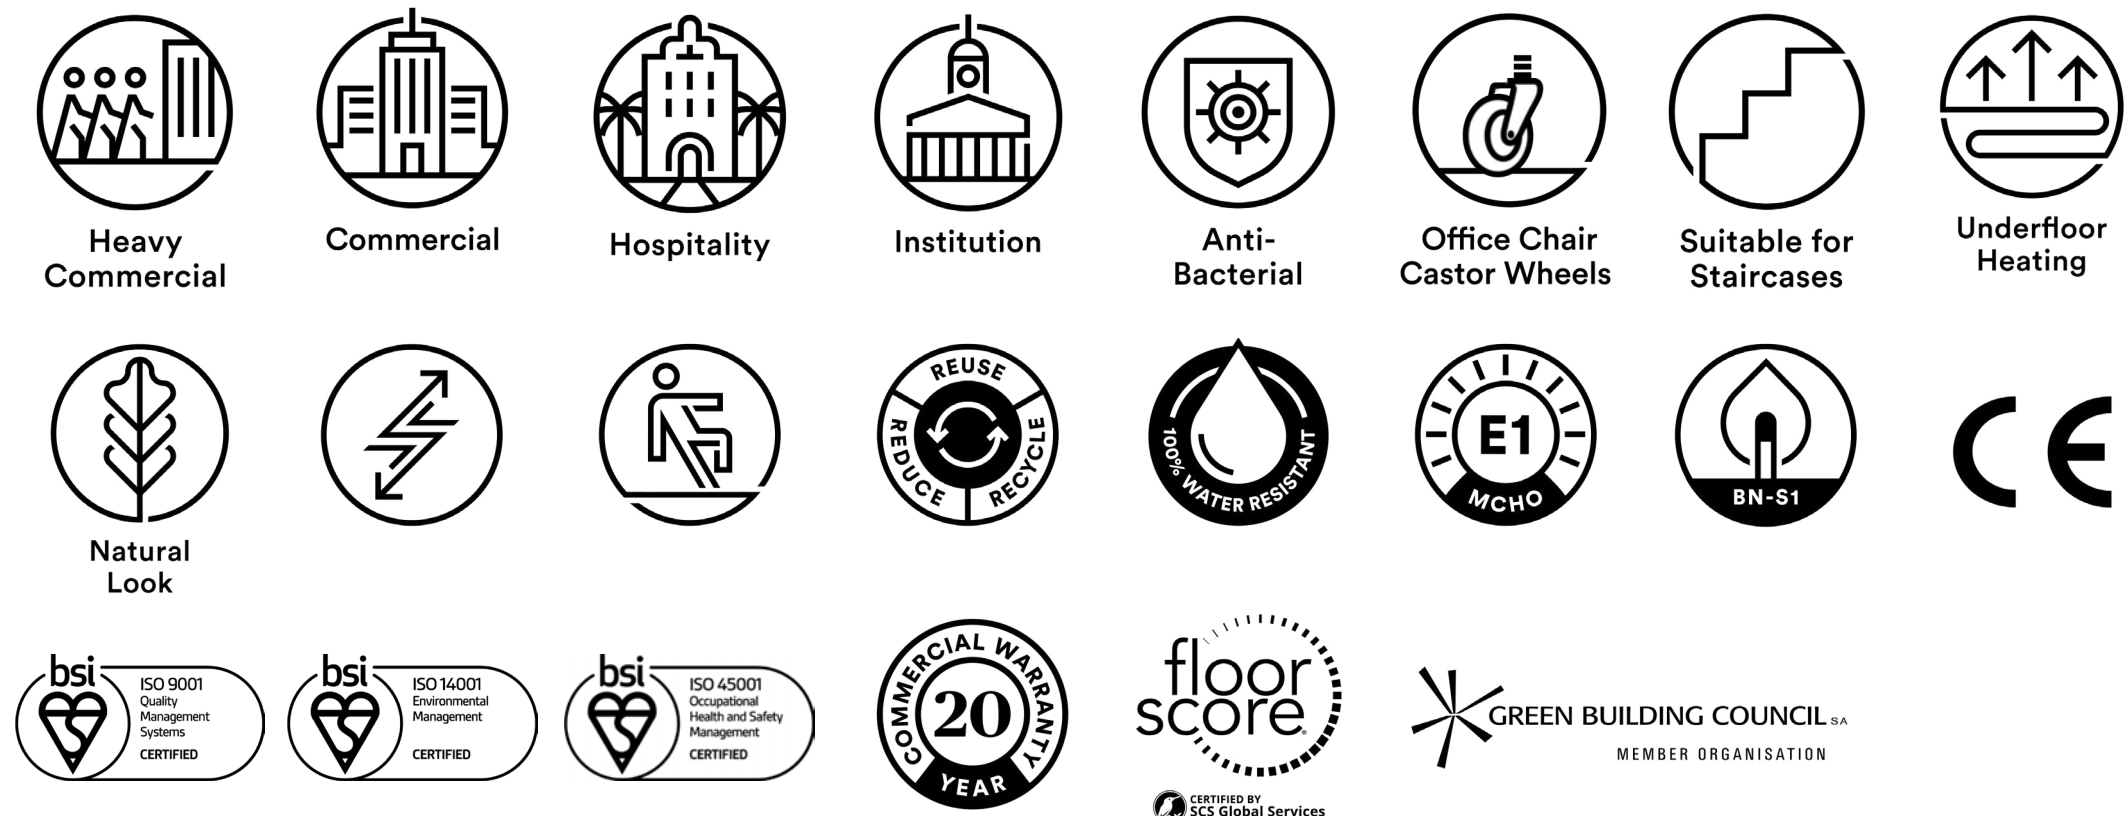

Bill of Quantities

- Belgotex IQ GRANIT SAFE-T 2.0mm Homogenous Heavy Commercial 25 × 2m Fully Flexible non-directional safety vinyl sheeting
- 20 year commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- Green tag level A Gold rated certification

Note: Belgotex offers customization of this product in colour. Please contact a Belgotex representative for more information.

Product characteristics may vary due to the nature of manufacturing. To combat colour variance do not install more than one dye lot in a single installation. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.