

Version	Plus - Wall - 90 cm - Inox - 800 m <sup>3</sup> /h
Design	Falmecc Lab
Collection	Silence - NRS

## TECHNICAL FEATURES

Materials/ Finishes	Scotch brite stainless steel (AISI 304)
Technology	NRS technology for a quieter kitchen
Features	Perimeter suction
Control	Electronic control Remote control (optional) Dialogue system
Function	Extracting/Filtering
Lighting	Dimmable lighting Dynamic Light (2700K - 5600K) Strip LED - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
Dimensions	90 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	60 cm
Notes	Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024



Photograph is for information purposes only. May not correspond to the selected version

## CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz

## MOTOR

Motor	800 m <sup>3</sup> /h
Maximum capacity	611 m <sup>3</sup> /h I.E.C.61591
Maximum sound level	50 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A


## WEIGHTS AND VOLUMES

Gross weight	40 kg
Net weight	34 kg
Volume	0.39 m <sup>3</sup>
Packaging dimensions	P 595 mm



## Optional accessories

Code	Description
KACL.1039	Carbon.Zeo Microtech regenerable filter
KACL.570#I	Extension chimney H700 Wall - Inox
KACL.571#I	Extension chimney H960 Wall - Inox
KACL.400	Silent / Conveyer NRS
105080053	Remote control

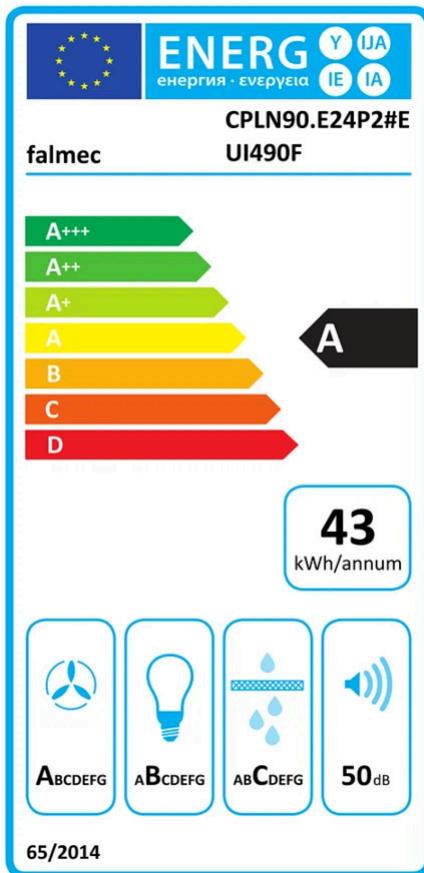

PF		
S	Falmec Lab	
M	Plus - Wall - 90 cm - Inox - 800 m3/h	
AEC	43.30	kWh/a
EEC	A	
FDE	29.70	
FDEC	A	
LE	22.00	
LEC	B	
GFE	80	
GFEC	C	
Qmin	270	m <sup>3</sup> /h
Qmax	501	m <sup>3</sup> /h
Qboost	611	m <sup>3</sup> /h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO		
PS	0.48	W
PI		
F	0.90	
EEl	51.60	
Qbep	351	m <sup>3</sup> /h
Pbep	363	Pa
Qboost	611	m <sup>3</sup> /h
Wbep	119	W
WL	5.80	W
Emiddle	128	lux
Lwa-SPEmax	50	dBa