Version	Plus - Ceiling - 90 cm - LED - Inox
Design	Falmec Lab
Collection	Design

TECHNICAL FEATURES

Materials/Finishes	Scotch brite stainless steel (AISI 304)
Features	Perimeter suction
Control	Electronic control Remote control included Dialogue system
Function	Extracting/Filtering
Lighting	Dimmable lighting Dynamic Light (2700K - 5600K) Strip LED Strip LED 2x8 W - 2700 K / 5600 K
Filters	Metallic grease filter, removable and washable Combined regenerable Carbon.Zeo filter (optional) Carbon.Zeo Microtech regenerable filter (optional)
Motor	Motor sold separately
Dimensions	90 cm
Maximum Electric hob distance	150 cm
Maximum Gas hob distance	150 cm
Notes	Cut-out size: 505 x 940 mm

Photograph is for information purposes only. May not correspond to the selected version
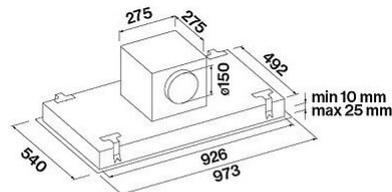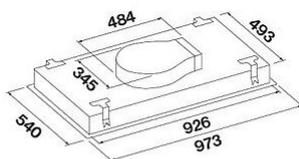
CONNECTION AND CONSUMPTION FUNCTIONS

Maximum consumption	30 W
Voltage/Frequency	220-240V 50-60Hz

MOTOR

Motor	
Maximum capacity	695 m³/h I.E.C.61591
Maximum sound level	63 dB (A)re1pW I.E.C. 60704-2-13
Energy class	B

WEIGHTS AND VOLUMES

Gross weight	25 kg
Net weight	21.8 kg
Volume	0.17 m3
Packaging dimensions	L 1120 x H 222 x P 670 mm

Optional accessories

Code	Description
KACL.782#49F	Slim motor 800 m3/h
KACL.798#41F	Remote under-roof motor 950 m3/h
KACL.786#41F	Outdoor extractor fan 1000 m3/h
KACL.796#4AF	Outdoor extractor fan 1500 m3/h
KACL.797#4AF	Remote under-roof motor 1300 m3/h
KACL.1049	Carbon.Zeo Microtech regenerable filter for "plug and play installation" (ceiling hoods up to L100 cm)
KACL.939#BF	Carbon.Zeo filter unit kit for ceiling (horizontal outlet)
KACL.928	Filter spare part Carbon.Zeo (for horizontal outlet)
KACL.953#BF	Carbon.Zeo filter unit kit for ceiling (vertical outlet)
KACL.789	Ceiling hood connection for rectangular pipes
KACL.931	Filter spare part Carbon.Zeo (for vertical outlet and under base kit h100 mm)
KACL.398	Flange - Ø150
KACL.396	Flange - Ø200
KACL.1064#BF	Grid for air outlet for ceiling hoods with "plug and play" filters - White
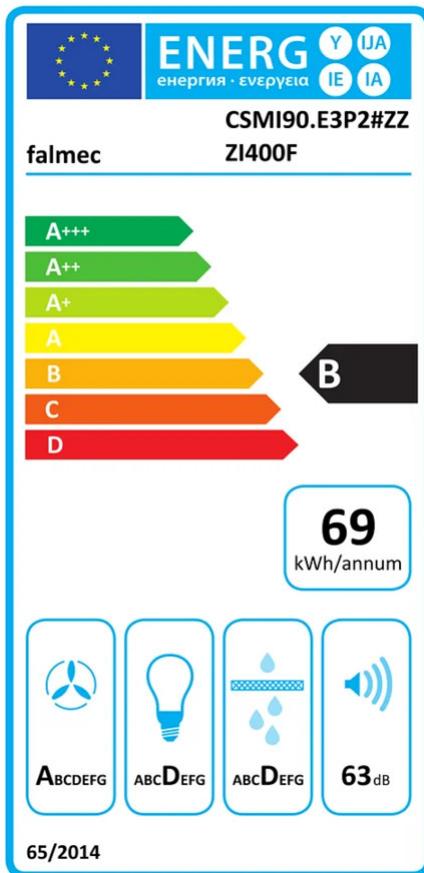
falmec

PF		
S	Falmec Lab	
M	Plus - Ceiling - 90 cm - LED - Inox	
AEC	69.40	kWh/a
EEC	B	
FDE	28.10	
FDEC	A	
LE	12.00	
LEC	D	
GFE	65.1	
GFEC	D	
Qmin	365	m³ /h
Qmax	600	m³ /h
Qboost	695	m³ /h
SPEmin	48	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO		
PS	0.48	W
PI		
F	1.00	
EEI	62.70	
Qbep	384	m³ /h
Pbep	414	Pa
Qboost	695	m³ /h
Wbep	157	W
WL	16.50	W
Emiddle	198	lux
Lwa-SPEmax	63	dBa