TOOLS REQUIRED:


4mm Hex Key Phillips Screwdriver / Bit Drill

HARDWARE:


1/4"-20 x 7/8" Joiner Bolt




#8 x 1" Washer Head Phillips Drive Wood Screw




Stiffener Rail

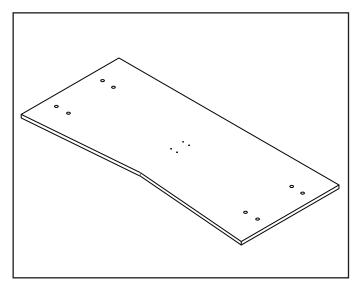


Lay top face down on a protective surface.



Align through holes in base assembly with corresponding threaded inserts installed in top. Secure with 1/4"-20 x 7/8" Joiner Bolts (4 per base).



Align pre-drilled center pilot holes with holes in Stiffener Rail and secure with #8 x 1" Washer Head Wood Screws (x8).

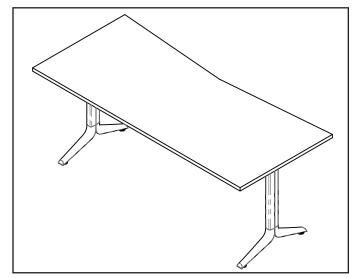

Carefully rotate the table onto its feet.

