

Una HEIGHT ADJUSTABLE ROUND TABLE

INSTALLATION GUIDE

SUGGESTED MINIMUM CREW: 2
APPROXIMATE INSTALL TIME: 30 min

TOOLS REQUIRED:

4mm Hex Key
Phillips Screwdriver / Bit
Drill

HARDWARE:

1/4"-20 x 7/8"
Joiner Bolt




#6 x 5/8" Pan
Head Wood
Screw




#6 x 1 1/4" Pan
Head Wood
Screw




Wire Guide

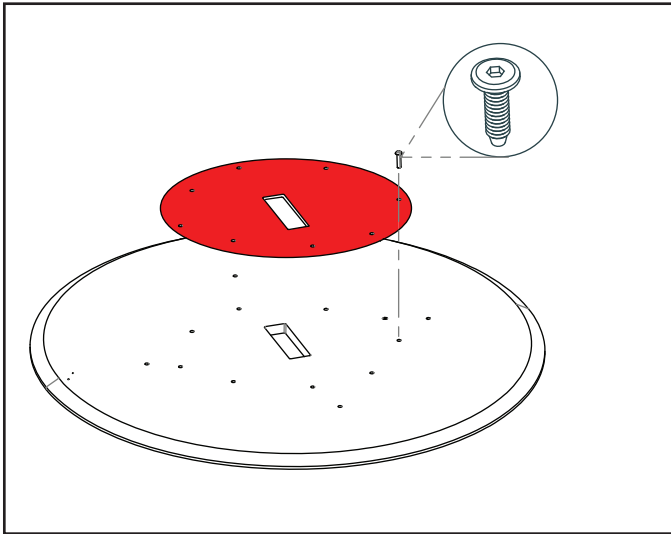

Place top face down on a protective surface and align Mounting Plate through holes with threaded inserts installed in top. Secure with 1/4"-20 x 7/8" Joiner Bolts (x6).

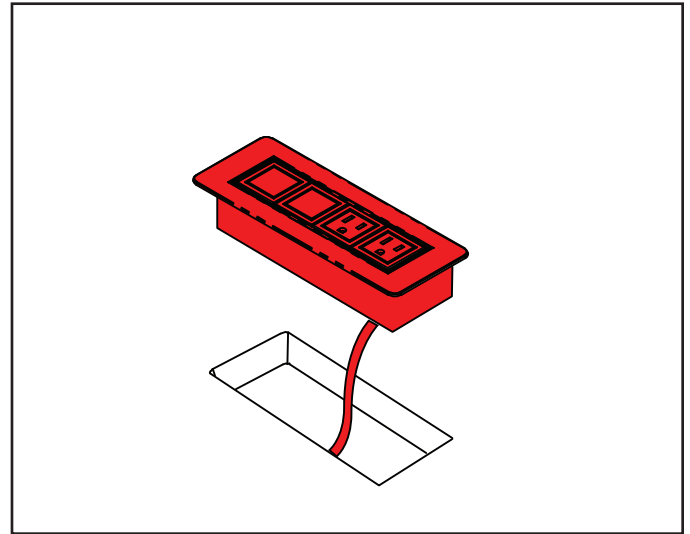

If your installation includes a Power & Connectivity device, it is critical that the unit is installed into the top before mounting to base. Do so by following the instructions supplied with the device.

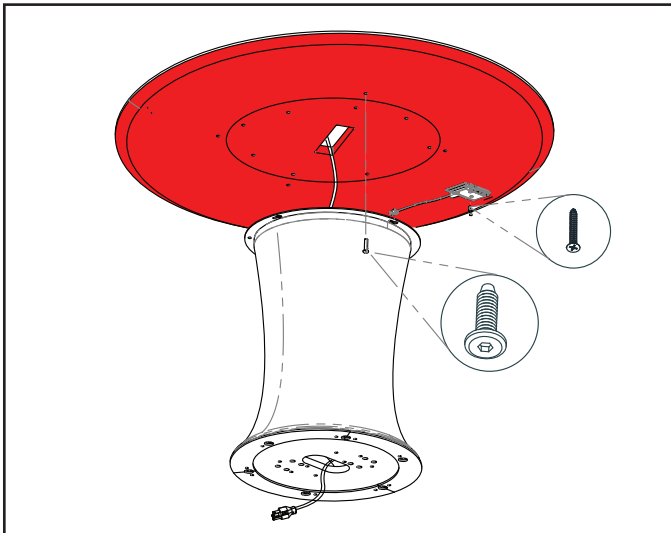

Once device is installed in top, guide cables down into base while aligning threaded holes in the top Mounting Plate with the through holes in Base Mounting Ring. Secure to plate with 1/4"-20 x 7/8 Joiner Bolts (x4).

Use #6 x 1 1/4" Pan Head Wood Screw (x2) To secure the height adjustable switch. To keep wire from hanging down install Wire Guide (x1) to the underside of the top with #6 x 5/8" pan Head Wood Screw (x1).