

Una HEIGHT ADJUSTABLE ROUND TABLE

INSTALLATION GUIDE

SUGGESTED MINIMUM CREW: 2
APPROXIMATE INSTALL TIME: 30 min

TOOLS REQUIRED:

4mm Hex Key
Phillips Screwdriver / Bit
Drill

HARDWARE:

1/4"-20 x 7/8"
Joiner Bolt




#6 x 1 1/4" Flat
Head Wood
Screw




#6 x 5/8" Pan
Head Wood
Screw




Wire Guide

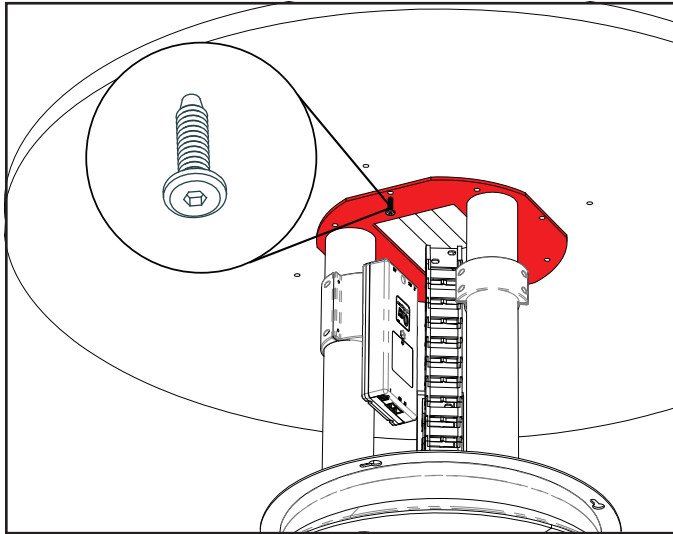


- 1** Set the top onto the base and align the pre-installed threaded inserts in the top with the through-holes in the base bracket. Secure with 1/4"-20 x 7/8" Joiner Bolts

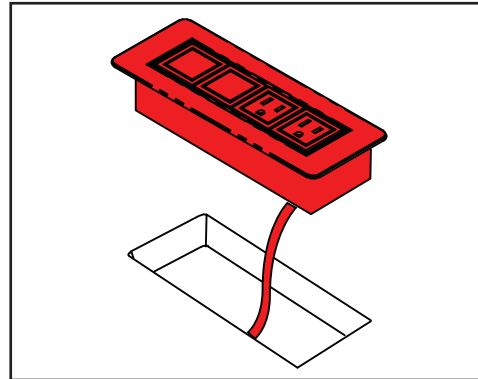


- 2** If your installation includes a Power & Connectivity device, install the unit into the top.

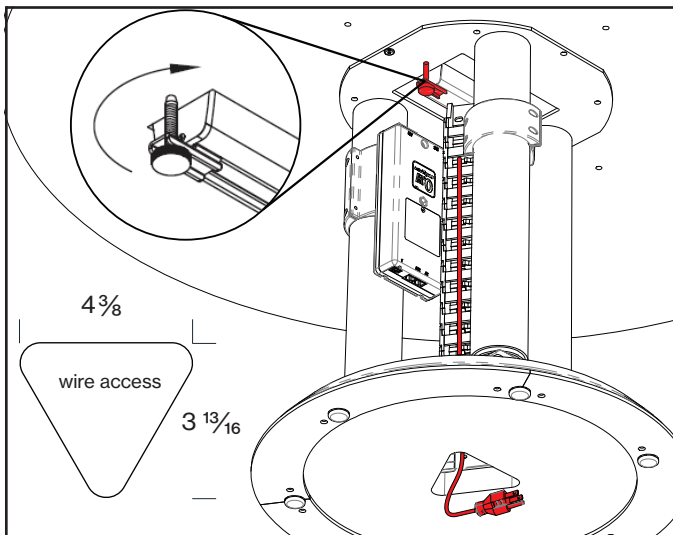

- 3** Once the Power & Connectivity device is in position, secure it using the hardware supplied with the unit and according to the installation guide provided with the device. Once secured, push the cables into the pre-installed cable chain and route the plug out through the opening in the bottom of the base.

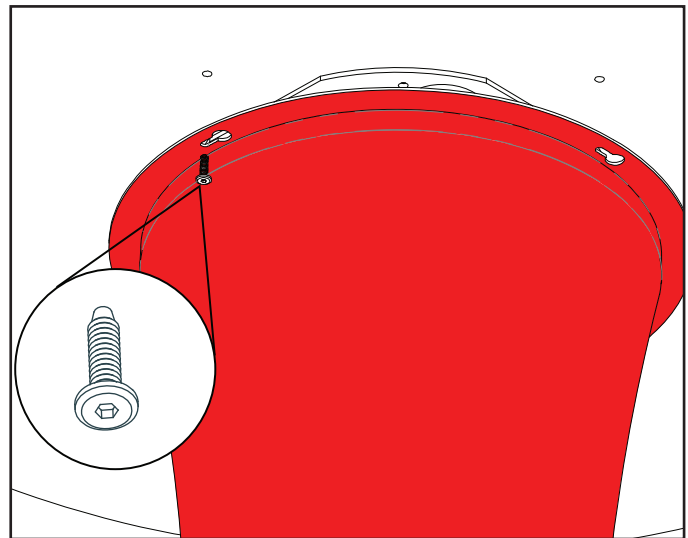

- 4** To secure the Flex Knit Cover, stretch the cover up to meet the top and secure it through the mounting ring using a 1/4"-20 x 7/8" Joiner Bolt.

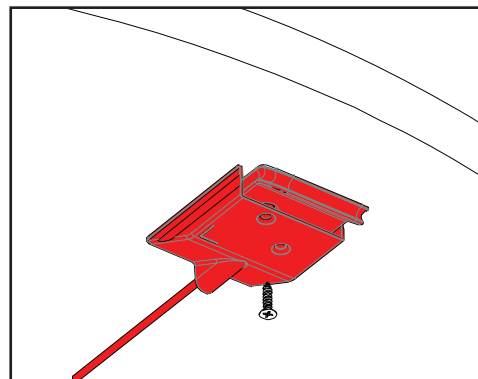

- 5** Secure the height-adjustable switch near the edge of the top using #6 x 1-1/4" Flat Head Wood Screws. Use the Wire Guide and #6 x 5/8" Pan Head Wood Screws to secure and route the switch cable.