

T-Flex Series Industrial Hoses

Powered By TIPCO Technologies



TIPCO
TECHNOLOGIES | *Focused
Flexible
Solutions*

 **TIPCO**
e-Store

Introducing the T-Flex Series by TIPCO Technologies

At TIPCO Technologies, our mission is to deliver innovative fluid solutions with unmatched service, integrity, and expertise. As a proud member of the TIPCO family, the T-Flex Series embodies our commitment to quality, reliability, and customer-first values. Designed to meet the rigorous demands of industrial and commercial applications, each hose in the T-Flex line reflects our vision to be the most trusted partner in hose and fitting distribution.

TIPCO Technologies is known for building lasting relationships through responsiveness, technical excellence, and a deep understanding of our customers' needs. The T-Flex Series is more than a product line—it's a reflection of the loyalty and trust our customers place in us every day.



T-Flex Chesapeake - Contractor Water Suction Hose

Built for tough jobs, this heavy-duty EPDM blend hose is ideal for water suction and discharge in construction, agriculture, and municipal applications. Its rugged design offers superior weather, ozone, and abrasion resistance—making it a reliable choice for dewatering, irrigation, and utility work in demanding environments.

-FLEX 913 CHESAPEAKE WATER

150 PSI MAX W.P.
(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (Lbs/ft)	BR (in)
TIP 913-100 T-FLEX CHESAPEAKE	1	1.34	150	450	0.5	4
TIP 913-125 T-FLEX CHESAPEAKE	1-1/4	1.65	150	450	0.69	5
TIP 913-150 T-FLEX CHESAPEAKE	1-1/2	1.89	150	450	0.8	6
TIP 913-200 T-FLEX CHESAPEAKE	2	2.44	150	450	1.14	7
TIP 913-250 T-FLEX CHESAPEAKE	2-1/2	2.95	150	450	1.5	10
TIP 913-300 T-FLEX CHESAPEAKE	3	3.5	150	450	1.75	12
TIP 913-400 T-FLEX CHESAPEAKE	4	4.53	150	450	2.48	18
TIP 913-600 T-FLEX CHESAPEAKE	6	6.61	150	450	4.84	28
TIP 913-800 T-FLEX CHESAPEAKE	8	8.78	150	450	8.1	48

Tube & Cover: EPDM Blend, Color: Black Temperature Range: From -30°C (-22°F) to 93°C (+200°F)

T-Flex Terrapin - Tank Truck Hose

Engineered for petroleum transfer, this nitrile rubber hose safely handles fuels and oils with up to 50% aromatic content. Ideal for tank truck loading, bulk fuel delivery, and mobile fueling operations, it offers excellent oil resistance, durability, and flexibility for demanding environments in the fuel distribution and logistics industries.

-FLEX 856 TERRAPIN TANK TRUCK

150 PSI MAX W.P.
(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)	BR (in)
TIP 856-075 T-FLEX TERRAPIN	3/4	1.2	150	450	0.39	3
TIP 856-100 T-FLEX TERRAPIN	1	1.42	150	600	0.51	4
TIP 856-125 T-FLEX TERRAPIN	1-1/4	1.69	150	600	0.75	5
TIP 856-150 T-FLEX TERRAPIN	1-1/2	1.93	150	600	0.93	6
TIP 856-200 T-FLEX TERRAPIN	2"	2.48	150	600	1.24	7
TIP 856-300 T-FLEX TERRAPIN	3"	3.5	150	450	2.3	12
TIP 856-400 T-FLEX TERRAPIN	4"	4.57	150	450	3.58	20
TIP 856-600 T-FLEX TERRAPIN	6"	6.77	150	450	6.48	28

Tube: Nitrile Rubber handles up to 50% aromatics, COVER: BLACK, NBR/PVC, OIL & OZONE RESISTANT Temperature Range: From -30°C (-22°F) to 85°C (+185°F)



All your hose needs at your fingertips on shop.tipcotech.com!



T-Flex Chem - UHMWPE Chemical Hose

Designed for aggressive chemical transfer, this Ultra-High Molecular Weight Polyethylene hose offers exceptional resistance to acids, solvents, and corrosive materials. Lightweight yet durable, it's ideal for chemical manufacturing, wastewater treatment, and industrial processing—delivering safe, reliable performance in the most demanding environments.

-FLEX 719 UHMW CHEMICAL



200 PSI MAX W.P.

(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)	BR (in)
TIP 719-075 GREEN T-FLEX CHEM	3/4	1.22	200	800	0.47	3
TIP 719-100 GREEN T-FLEX CHEM	1	1.47	200	800	0.58	4
TIP 719-125 GREEN T-FLEX CHEM	1-1/4	1.73	200	800	0.67	5
TIP 719-150 GREEN T-FLEX CHEM	1-1/2	2.01	200	800	1	6
TIP 719-200 GREEN T-FLEX CHEM	2	2.52	200	800	1.13	8
TIP 719-300 GREEN T-FLEX CHEM	3	3.6	200	800	2.11	12
TIP 719-075 PURPLE T-FLEX CHEM	3/4	1.22	200	800	0.47	3
TIP 719-100 PURPLE T-FLEX CHEM	1	1.47	200	800	0.58	4
TIP 719-150 PURPLE T-FLEX CHEM	1-1/2	2.01	200	800	1	6
TIP 719-200 PURPLE T-FLEX CHEM	2	2.52	200	800	1.13	8
TIP 719-300 PURPLE T-FLEX CHEM	3	3.6	200	800	2.11	12
TIP 719-075 ORANGE T-FLEX CHEM	3/4	1.22	200	800	0.47	3
TIP 719-100 ORANGE T-FLEX CHEM	1	1.47	200	800	0.58	4
TIP 719-125 ORANGE T-FLEX CHEM	1-1/4	1.73	200	800	0.67	5
TIP 719-075 BLACK T-FLEX CHEM	3/4	1.22	200	800	0.47	3
TIP 719-100 BLACK T-FLEX CHEM	1	1.47	200	800	0.58	4
TIP 719-125 BLACK T-FLEX CHEM	1-1/4	1.73	200	800	0.67	5
TIP 719-150 BLUE T-FLEX CHEM	1-1/2	2.01	200	800	1	6
TIP 719-200 BLUE T-FLEX CHEM	2	2.52	200	800	1.13	8
TIP 719-150 YELLOW T-FLEX CHEM	1-1/2	2.01	200	800	1	6
TIP 719-200 YELLOW T-FLEX CHEM	2	2.52	200	800	1.13	8

Tube: White w/Translucent UHMW, Reinforcement: Textile Plies + Double Wire Helix, Cover: Smooth, EPDM Blend, Available Colors: Black, Green, Orange, Purple, Blue, & Yellow
 Temperature Range: From -40°C (-40°F) to 100°C (+212°F) depending on medium

T-Flex Sahara - Hot Air Blower Hose

Built for bulk transfer systems, this EPDM hot air blower hose handles high-temperature air with ease. Its 2-ply construction and helix wire reinforcement provide strength and flexibility, while the pin-pricked cover prevents blistering—making it ideal for pneumatic conveying in cement, plastics, and dry goods industries.

-SAHARA-419 HOT AIR



150 PSI MAX W.P.

(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)	BR (in)
TIP 419-300 T-FLEX SAHARA	3	3.58	150	450	2.02	12

Tube & Cover: EPDM, Reinforcement: 2 Ply + Helix Wire, Pin Pricked, Color: Brown Temperature Range: From -40°C (-40°F) to 150°C (+300°F)

T-Flex FDA - Corrugated Food Suction Hose

This FDA-compliant hose features a white nitrile tube for safe, sanitary transfer of food-grade liquids. Its corrugated cover offers superior flexibility and is resistant to oil, ozone, and weathering—making it ideal for dairy, beverage, and bulk food processing applications where hygiene and durability are essential.

-FLEX 332 FDA FOOD & BEVERAGE

150 PSI MAX W.P.
(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)	BR (in)
TIP 332-150 T-FLEX FDA	1-1/2	1.93	150	600	0.85	5
TIP 332-200 T-FLEX FDA	2	2.48	150	600	1.1	8
TIP 332-250 T-FLEX FDA	2-1/2	2.99	150	600	1.5	10
TIP 332-300 T-FLEX FDA	3	3.54	150	600	2	12
TIP 332-400 T-FLEX FDA	4	4.57	150	600	2.8	14

Tube: White, Nitrile - FDA, COVER: Gray, Corrugated, NBR/PVC, OIL & OZONE RESISTANT Temperature Range: From -30°C (-22°F) to 100°C (+212°F)

T-Flex Grit - Cement Discharge Hose

Built for heavy-duty dry material handling, this abrasion-resistant hose safely discharges cement, sand, and other bulk materials. Its anti-static design prevents static buildup during transfer, making it ideal for construction, mining, and industrial applications where safety and durability are critical.

-GRIT-107 HEAVY DUTY MATERIAL HANDLING

75 PSI MAX W.P.
(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)
TIP 107-400 T-FLEX GRIT	4	4.57	75	225	1.9

Tube: 3/16" Abrasion Resistant, Anti-Static, Color: Black Temperature Range: From -30°C (-22°F) to 70°C (+158°F)

T-Flex Cyclone - Steel Air Hose

Engineered for high-pressure air delivery, this steel-reinforced hose features a durable NBR/PVC blend cover and pin-pricked design to prevent blistering. With wire braid or spiral options, it's built to perform in demanding industrial, construction, and mining environments where strength, flexibility, and oil resistance are critical.

-FLEX 602 CYCLONE STEEL AIR

600 PSI MAX W.P.
(Warning: Inspect hose for damage before use)

TIPCO Part #	ID (in)	OD (in)	WP (PSI)	Burst (PSI)	Weight (lbs/ft)
TIP 602-150 T-FLEX CYCLONE	1-1/2	1.97	800	3200	1.05
TIP 602-200 T-FLEX CYCLONE	2	2.52	600	2400	1.34
TIP 602-250 T-FLEX CYCLONE	2-1/2	3.07	600	2400	2
TIP 602-300 T-FLEX CYCLONE	3	3.62	600	2400	2.15
TIP 602-400 T-FLEX CYCLONE	4	4.8	600	2400	4.6

Tube: Black NBR, Cover: Yellow NBR/PVC Blend, Pin Pricked Temperature Range: From -30°C (-22°F) to 93°C (+200°F)


ONE TIPCO

People. Partnerships. Innovation.

ONE TIPCO signifies the strength and unity of our organization from coast-to-coast, driven by cutting-edge technology, strong brand identity, and forward-thinking strategies, powered by our dedicated people and partnerships, all working together to achieve excellence and innovation.

Powered By TIPCO

TIPCO Technologies is proudly made up of a diverse range of companies that enhance our offerings and capabilities, all powered by our unwavering commitment to quality and customer satisfaction. Each company in our family brings unique expertise and innovative solutions, allowing us to provide a comprehensive suite of products and services tailored to meet the needs of our customers. Together, we leverage our strengths to drive growth, foster collaboration, and deliver exceptional value, ensuring that our customers receive unparalleled support and the best solutions available in the industry.

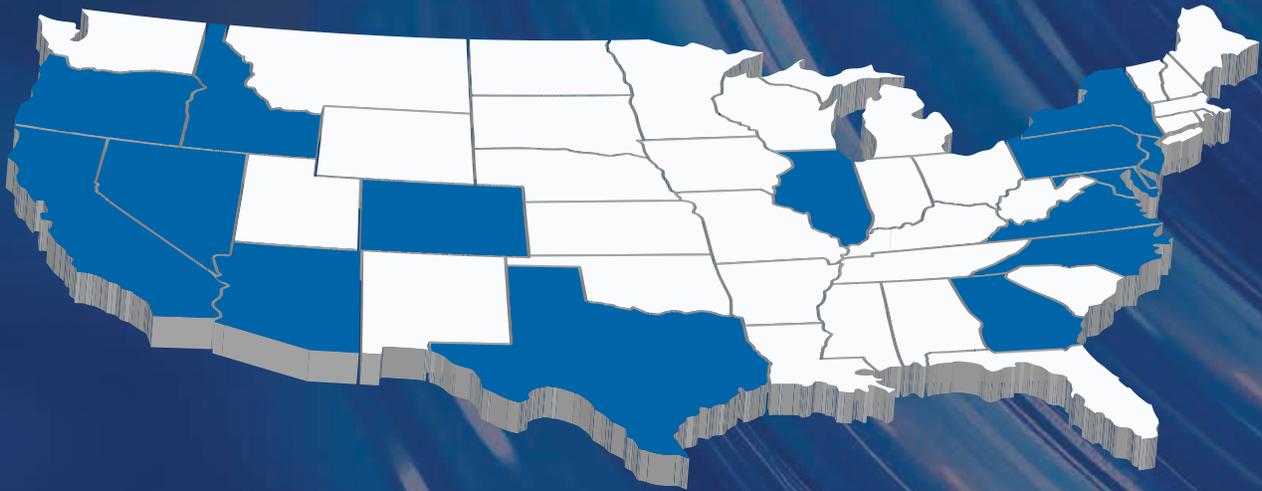

Arizona

Deer Valley, AZ (Alternative)
Gilbert, AZ (Alternative)
Phoenix, AZ (Alternative)
Tucson, AZ (Alternative)

California

San Diego, CA (Charter) ISO 9001-2015
Orange, CA (Charter)
Pomona, CA (Charter)
Richmond, CA (GSI)
Rancho Cucamonga, CA (GSI)

Colorado

Denver, CO (TIPCO)

Delaware

Wilmington, DE (TIPCO)

Georgia

Gainesville, GA (TIPCO)
Marietta, GA (TIPCO)

Illinois

Elmhurst, IL (Alliance)

Idaho

Boise, ID (Alternative)

Maryland

Glen Burnie, MD (TIPCO)
Frederick, MD (TIPCO)
Owings Mills, MD (TIPCO)
Pocomoke City, MD (TIPCO)

Nevada

Las Vegas, Nevada (Alternative)

New Jersey

Kenilworth, NJ (Flexline) ISO 9001-2015
Vineland, NJ (TIPCO)

New York

Rochester, NY (Potter)

North Carolina

Stallings, NC (TIPCO)

Oregon

Albany, OR (A-1 Coupling)
Eugene, OR (A-1 Coupling)
Eugene, OR (Pacific Rubber)
Tualatin, OR (A-1 Coupling)
Portland, OR (GSI)

Pennsylvania

Hanover, PA (TIPCO)

Texas

Corpus Christi, TX (Hose of S. Tx)
Houston, TX (Wilco)
Houston, TX (DW) ISO 9001-2015

Virginia

Chantilly, VA (TIPCO)
Chester, VA (TIPCO)
Lynchburg, VA (TIPCO)
Fredericksburg, VA (TIPCO)
Manassas, VA (TIPCO)
Suffolk, VA (TIPCO)

TIPCO
TECHNOLOGIES | *Focused
Flexible
Solutions*

www.tipcotech.com
sales@tipcotech.com



Now Available

TIPCO  e-Store

Shop online at: www.shop.tipcotech.com