



FABFLEX[®]

FABFLEX[®]

A PROBLEM SOLVER FOR TOUGH APPLICATIONS



BELTSERVICE
CORPORATION

INTEGRALLY MOLDED CLEAT PATTERNS



FABCLIMB

ABRASION RESISTANT CLEATS WITH "Y" CENTER PATTERN



- Cleats molded into belt cover
- No cleat separation
- Increased flexibility
- Excellent abrasion resistance
- Strong fastener holding ability
- Inclines up to 45 degrees


CLEAT SPECIFICATIONS

Height	1-1/4"
Thickness	3/4" Tapered to 3/8"
Spacing	12" and 13" Centers
Type	Center Y Cleat
Cover Hardness	45 ± 5 (Shore A)


BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20° / 180°F
Min. Pulley Dia.	Per Application
Working Strength	225 lbs


3 STYLES AVAILABLE



17" Pattern



23" Pattern



31" Pattern

BIGHORN

SMOOTH, RELIABLE PRODUCT DELIVERY



CLEAT SPECIFICATIONS


Height	3/4" (Rounded Top)
Thickness	3/4"
Spacing	9" Centers
Type	Parallel Overlap
Cover Hardness	60 ± 5 (Shore A)

BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20 / 180°F
Min Pulley Dia.	8"
Working Strength	150 - 400 lbs

BULLHORN

MAINTAINS CONSTANT CONTACT WITH RETURN IDLERS

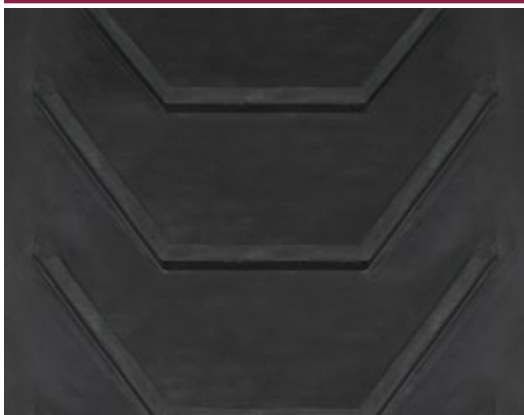

CLEAT SPECIFICATIONS

Height	1/2"
Thickness	1/2" (Square)
Spacing	6" Centers
Type	Parallel Overlap
Cover Hardness	60 ± 5 (Shore A)

BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20 / 180°F
Min. Pulley Dia.	8"
Working Strength	150 - 400 lbs

FABLIFT

EASILY MOVES LARGE ROCK & RECYCLED ASPHALT



CLEAT SPECIFICATIONS

Height	1" (Square)
Thickness	1"
Spacing	10" Centers
Type	Parallel Overlap
Cover Hardness	60 ± 5 (Shore A)

BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20 / 180°F
Min. Pulley Dia.	8"
Working Strength	150 - 400 lbs

LONGHORN

DESIGNED TO HANDLE HEAVY AND WET MATERIALS



CLEAT SPECIFICATIONS

Height	1"
Thickness	3/4" - 7/16" Gumdrop
Spacing	12" Centers
Type	Staggered Herringbone
Cover Hardness	60 ± 5 (Shore A)

BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20 / 180°F
Min Pulley Dia.	8"
Working Strength	150 - 400 lbs

FABTOUGH

LONGER PERFORMANCE AND EXTENDED SERVICE LIFE



FEATURES & BENEFITS

- | | |
|--------------------------|---------------------------------------|
| ▪ Greater Belt Strength | ▪ Less Replacement Labor |
| ▪ Decreased Belt Stretch | ▪ Increased Productivity |
| ▪ Wear Resistance | ▪ Less Down Time |
| ▪ Lower Cost | ▪ Cleats Guaranteed To Never Separate |

STONE SLINGER

ACCURACY FOR HARD TO REACH AREAS WITH FOCUS ON DESIGN



CLEAT SPECIFICATIONS

Height	1/2"
Thickness	1/2"
Spacing	6" Centers
Type	Open Chevron
Cover Hardness	60 ± 5 (Shore A)

BELT SPECIFICATIONS

Base Fabric	Synthetic
Cover Compound	SBR
Temp. Range	-20 / 180°F
Min. Pulley Dia.	8"
Working Strength	150 - 400 lbs

FABFLEX®

Compatible with Top Manufacturers, Including:

Roadtec | Wirtgen | Caterpillar | CMI | Bomag | Dynapac



800-727-2358 | beltservice.com

