

HD Telescopic Pole Inspection Camera System



WESTMINSTER
GROUP PLC

Product Code: 1510-06-2

Key Features



Rapid Deployment



High Specification Camera



Day & Infra-Red Night Operation



2.5 & 4 Metre Telescopic Pole Options



7 Hour Battery Operation



Camera Waterproof IP65



Overview

The HD telescopic Pole Inspection Camera System is ideal for quick, safe covert and overt inspections in all environments.

Full colour images can be viewed in daylight, and in darkness the system switches automatically to infrared technology. The screen console is easily attached to the telescopic pole to provide great mobility and rapid deployment.

The compact and easy to use design of the Telescopic Pole System can be used with minimal training by the military, police, prison service, customs and excise, security and many other industry sectors.

Features



- High Spec – day & night
- Telescopic Pole available in 2.5m and 4m, Carbon Fibre (Black)
- Robust & Lightweight
- Up to 7 hours of continuous use
- Single user
- Camera IP65 Waterproof

HD Telescopic Pole Inspection Camera System



WESTMINSTER
GROUP PLC

Specifications

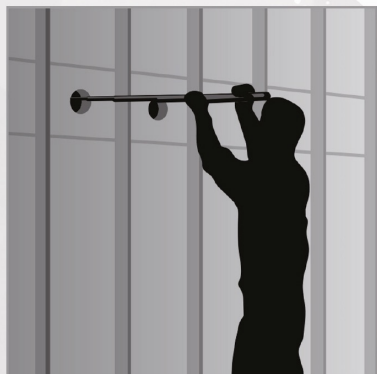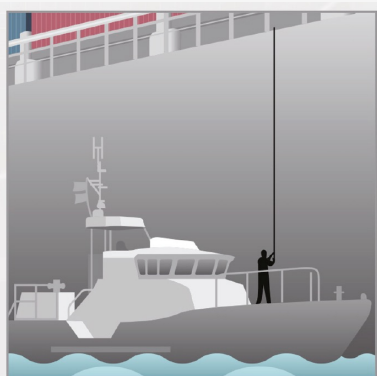

65mm Camera

- **Exposure Control:** Electronic
- **Lens:** FL 4,6 f4.5 (fixed)
- **Mode:** Colour/Mono
- **Sensor:** 2.08mm CMOS
- **Resolution:** 1920 x 1080
- **Sensitivity:** 0.01 LUX
- **IR Illumination:** 940nm
- **Waterproof Capacity:** IP65

Monitor

- **LCD Size:** 7.0" (diagonal)
- **Driver Element :** a-Si TFT active matrix
- **Resolution:** 1024 x 600 pixels
- **Display Mode:** Normally White, Transmissive
- **Sunlight Readable:** Protective screen cover / Sunshade

DVR

- **Resolution:** 1920 x 1080
- **Compression Format:** MPEG
- **Snapshot Format:** JPEG
- **Working Mode:** Video / Snapshot
- **Memory:** Internal / USB

System

- **Power supply:** (internal) Battery Lithium 11.1v 3200mAh 12v ac adapter
- **Battery Meter:**
- **HDMI Port:**
- **WiFi & Bluetooth connectivity:**
- **Voltage:** 12v DC
- **Power Consumption:** (w/o IR) ≤530mA
- **Power Consumption:** (IR) ≤630mA
- **Operating Temperature:** X-20 to +55°C
- **Environment Rating:** IP54