

# Specifications

## OPERATION

- Thermostatic function, keep the temperature at 38 Celsius degree
- Adjustable temperature, hot temperature maximum 56 Celsius degree, cold temperature minimum 15 Celsius degree, which is related to local water system

## FLOW


- Showerhead is limited to 2.5gpm(9.5L/min) at 80psi
- Handheld shower is limited to 2.5gpm(9.5L/min) at 80psi

## CARTRIDGE




- Thermostatic cartridge

## STANDARDS

- Third party certified to meet ASME A112.18.1 all applicable requirements referenced therein

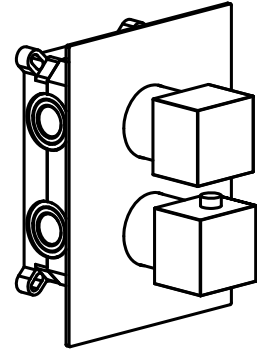


Concealed Shower Set

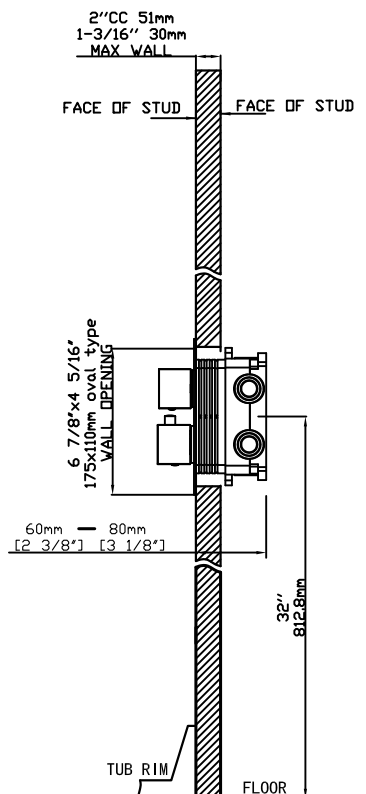


Note: Dimensions are for reference only. Detailed information is in accordance with the final product.

# Concealed Shower Set Installation


## INSTALLATION MANUAL Tools You Will Need :




Adjustable wrench



Hexagon wrench



Philips Screwdriver




Pipe Tape

### Notes before installation :


1. Please check that all components are present.
  2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
  3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
  4. Pictures in the manual are general in content and may not represent exactly your purchased faucet.
- If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.
  6. Please insure that to make a wash for all water pipe before installation to insure no impurity inside.
  7. Need to used the 11-13N.m power to lock the cartridge.




**All valve have the pass the the air testing and pressure testing before ship out. If request pressure testing before installation, Must under the guide of the professional Plumber with license. And air pressure do not over 125PSI. If you want to the Brust testing over 500±2PSI, you need to changed a new cartridge for normal using.**

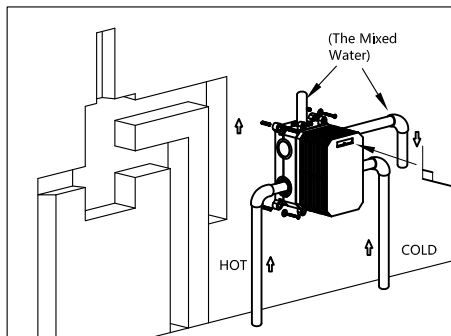


1. Confirm the install place of shower valve, connect the hot water on left side and cold water on right side (size for pre-install box: 110\*175\*60mm).




2. Laid the shower valve into the solid wall, the suitable depth is 60mm.

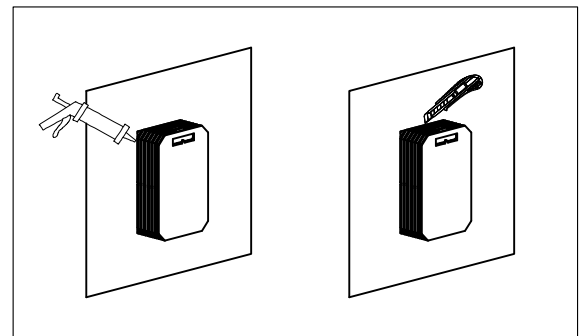

3. Use glue along the pre-install box to keep it stable, then cut off the part which pre-install box exceed the wall by cutting tool.

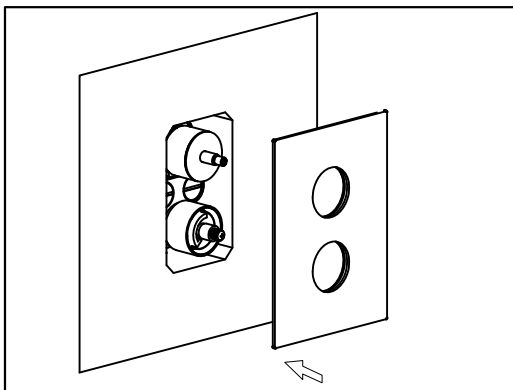

4. Lock the deck plate into the body and ceiling to the wall.

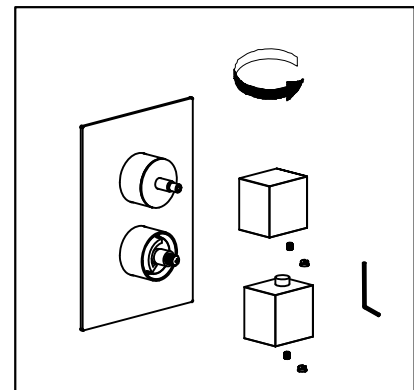

5. Install the handles by hexagonal wrench, then install the red and blue color button.