

Cullman Cabinet & Supply COMPANY

VOLUME 11



DOOR CATALOG

QUALITY YOU CAN DEPEND ON



THE HISTORY OF CULLMAN CABINET & SUPPLY CO.

Since October 1947, Cullman Cabinet has remained flexible with the times and has brought innovative ideas to the cabinet industry. The founder, Robert Edge, met early challenges by convincing local builders that kitchen cabinets could be built off-site rather than being a part of in-house construction. In 1954 Cullman Cabinet became the first producer of post-formed laminated countertops in the Southeastern United States. Twenty years later, the business was one of the largest custom cabinet companies in Alabama.

Following the tradition of always investing back into the company with the latest and most innovative equipment, James Edge (second generation) began supplying other cabinet companies with doors in the early 1980's. This idea allowed those companies to concentrate on building and marketing their cabinets, without the investment in expensive and sophisticated door production equipment.

In 1985, after steady growth in the production of cabinet doors and countertops, the family decided to cease building custom cabinets. This allowed a concentrated effort on these two products as the business evolved into a supplier to the cabinet industry. In 2008, the high-speed countertop lines were converted to 'water-base' making the process more environmentally friendly. In the last two decades investments have steadily been made in CNC routers, optimizing saws, molders, and sanding equipment to enhance door production.

To be a more full-service provider, laminated panels were added to the product line in 2018, followed the next year by dove-tailed drawer boxes. The third generation of this family owned business continues to look for ways to provide the excellent service and quality its customer base has come to expect. Their goal is to stay in position to meet the growing demand for its products in the future.





ORDER PLACEMENT

- Orders should be placed by completing the Door Order Form on the inside back cover of this catalog and by sending it by email, fax or mail.
- Orders can be emailed and faxed 24 hours a day, seven days a week.
- Questions about orders can be answered by Cullman's staff Monday - Friday 7am - 4pm, CST
- Closed for lunch between 11am and noon.
- Incomplete orders will delay processing.

TERMS

- A deposit of 50% is required with an order.
- An order will not be put into production until the deposit is received.
- The remaining balance is due before shipping or upon pickup.
- Customers may apply for an account by submitting a credit application. If the application is fully approved, then customers can place orders against their account and receive monthly invoices. Terms are Net 30 days from date of invoice. No deposit will be required for customers on account.
- We accept most major payment cards, including Visa, Mastercard, Discover and American Express. An additional fee of 3.5% will be paid by customers using a card. Customers paying by cash or approved check will not incur the additional 3.5% fee.

Leadtime

- Standard leadtime is 5 to 7 working days, beginning the day after order is placed. Longer leadtimes may be required for complex orders.
- Applied moulding and rustic doors require an extra day for production.
- Leadtime may change so please ask for current leadtime when you place your order.

Orange Rush Orders

- **Orange Rush** service is available for an upcharge of 50% over regular pricing.
- Rush orders are defined as shipping 2-4 working days for most products.
- Leadtimes for these **Orange Rush** orders will be affected by size of order.
- **Orange Rush** is defined as “no more than 10 pieces, whether doors or fronts.”

Order Changes and Cancellations

- Any changes or cancellations made to an order after it has been placed is subject to a flat charge PLUS the cost of time and materials.
- Changes and cancellations are not allowed on **Orange Rush** Orders.

Shipping

- All prices are FOB Cullman, Alabama.
- Typically, smaller orders ship via UPS and larger orders ship via common carrier or Cullman Cabinet truck.
- Order size and delivery location will determine how your product will be shipped.
- Arrangements can be made for orders to be picked up.

Cullman Cabinet is not responsible for delays and damages in shipping. Please report any freight damage to the delivery driver and note on the bill of lading the problem to assure that a freight claim can be filed and processed without delay.



WOOD SPECIFICATIONS

Wood is a beautiful, naturally occurring product. A variety of grain patterns and color tones will exist in the same wood species. Growing conditions such as the amount of rainfall, soil type, sunlight, minerals, and temperature contribute to these variations. Natural characteristics in the wood such as varying color shades, grain patterns, burl, pin knots, mineral deposits, and sap are not considered defects. We hope that the general descriptions of our stock wood species will be helpful as you select your wood.

Alder is a soft grain, light creamy, brownish-red wood. It easily absorbs stain and has a reasonable blend of color tones. Alder is not color selected and can be finished to look similar to cherry and mahogany. It does contain some pin knots and can blotch if the stain is not applied correctly.

Rustic Alder is the same as alder, but with solid knots and open knots. The number and size of knots will vary from door to door.

Ash is a hard, wide wavy-grained, light-brown to tannish white wood. Ash naturally has variation in color tones but can be color selected. Special order. Call for a quote.

Basswood is a soft-grained, creamy, off-white wood. Basswood absorbs stain well, but may be blotchy if not applied correctly.

Birch is a off-white to light-brown wood. Occasional mineral and pin knots, possible light heart wood.

Cherry is a hard, tight-grained, reddish-brown wood with some variation in color tones. Some gum pockets and slight sap are not considered defects.

White Pine is a soft-grained, light, creamy wood with yellowish and brownish color tone and solid knots. The number and size of knots will vary from door to door. It is also less stable than other woods.

Hickory is a very hard, very tight-grained creamy to brown wood. It does not absorb stain well and will have a wide range of wood color in each door and is not color selected.

Rustic Hickory is the same as hickory but with solid and open knots in which the number and size of knots will vary from door to door.

Northern Hard Maple is a very hard, soft-grained wood that is light yellowish to white wood. Hard maple does not absorb stain well, but is very consistent in color.

Northern Soft Maple is a hard, soft-grained wood with color tones ranging from creamy white to soft browns. Soft maple is not a color selected wood and absorbs stain with difficulty.

Paint Grade Maple is a hard maple that comes from the heartwood of the tree. Generally light tan to dark brown in color. Mineral streaks and some checking may appear.

Poplar is a soft-grained wood with color tones that range from creamy white to brown, with greens and black. It absorbs stain with ease and is not a color selected wood.

Red Oak is a hard wide-grained wood with color tones ranging from light reds to deeper reddish tones. Red oak absorbs stain easily and can be color selected.

White Oak is a hard, wide-grained wood with tannish to brown color tones. White oak stains and finishes well, and is not a color selected wood.


Walnut is a hard, tight-grained, rich, dark brown with slight lighter brown wood tones and touches of sap. Walnut stains well.

1/4" Plywood Veneers are used in our flat panel doors and are available in the following species: cherry, knotty white pine, maples, red oak, white oak, and alder. (Note: we use white birch in basswood and we use natural birch in poplar.)

MDF (Medium Density Fiberboard) consists of finely ground wood materials mixed with a high bond resin glue. MDF is a paintable material only.

NOTE: Depending upon availability, there are many other wood species that can be special ordered. These non-stock species are special quote only and will require longer lead times for production.



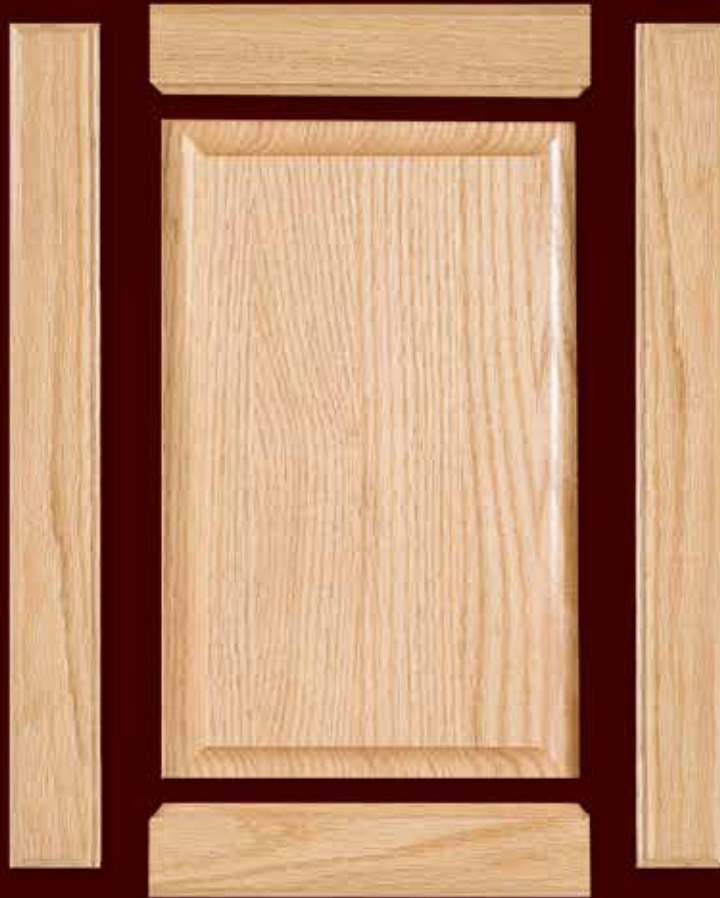

COPE & STICK DOORS

FEATURES & BENEFITS

- Northern Hardwood on most species of wood
- Spacers used on all raised panel doors
- Diamond tooling used for machining consistency
- Hardwood lumber kept in a climate-controlled warehouse
- All solid panels are produced using standard glue reel process

- Door widths 25" and over get 2 vertical panels
- Door length receives a horizontal center rail at 46" (unless specified that it is not needed)
- No warranty on these doors



#4

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"

INSIDE PROFILE

JF/REGULAR

REGENCY

WB

HA

PRODUCTION

PANEL

RAISED

REVERSE

SPECIALTY PANEL

REVERSE DOUBLE GROOVE

SPW

RICHMOND

NOTTINGHAM

JAMESTOWN

(Production and Jamestown only available with Regular Inside Profile.)

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL *

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

MISSION

* Cannot bore doors with Reverse Bevel edge.



#1SA

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"



#3

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"

INSIDE PROFILE

JF/REGULAR

PANEL

RAISED

REVERSE

REVERSE DOUBLE GROOVE

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL *

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

MISSION

* Cannot bore doors with Reverse Bevel edge.



Production Square

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"

Production Arch

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"

Production Eyebrow

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"

INSIDE PROFILE

PRODUCTION

PANEL

RAISED

REVERSE

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL*

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

MISSION

* Cannot bore doors with Reverse Bevel edge.



Nottingham W/Mould

Drawer Front

Rail Top/Bottom	Stile Side	Min, Width	Min. Height
2"	3 1/4"	9"	6 1/2"

Door

Stile & Rail Size	Minimum Width	Minimum Height
3 1/4"	9"	9"



Nottingham No Mould

Drawer Front

Rail Top/Bottom	Stile Side	Min, Width	Min. Height
2"	3 1/4"	9"	6 1/2"

Door

Stile & Rail Size	Minimum Width	Minimum Height
3 1/4"	9"	9"

Nottingham Arch No Mould

Stile & Rail Size	Minimum Width	Minimum Height
3 1/4"	11"	11"

INSIDE PROFILE



NOTTINGHAM w/ MOULD



NOTTINGHAM NO MOULD


PANEL



REVERSE




NOTTINGHAM



1/4" PLYWOOD PANEL

OUTSIDE PROFILE



M6



DROP 1/4" ROUND



PROFILE



1/2" COVE



SQUARE



#4PRS

Drawer Front

Rail Top/Bottom	Stile Side	Min, Width	Min. Height
2"	2 1/2"	7 1/2"	6 1/2"

Door

Stile & Rail Size	Minimum Width	Minimum Height
2 1/2"	8"	8"



#1PRS

Door

Stile & Rail Size	Minimum Width	Minimum Height
2 1/2"	10 1/2"	11"



#7 With Mould

Drawer Front

Rail Top/Bottom	Stile Side	Min, Width	Min. Height
2"	2 5/16"	7 1/2"	6 1/2"

Door

Stile & Rail Size	Minimum Width	Minimum Height
2 5/16"	7 1/2"	6 1/2"

#7 is also available with no mould. Please designate when ordering.

INSIDE PROFILE

NOTTINGHAM

PANEL

REVERSE

NOTTINGHAM

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

PROFILE

1/2" COVE

SQUARE

INSIDE PROFILE

REGENCY

PANEL

REVERSE

#7

OUTSIDE PROFILE

DROP 1/8" ROUND



#18
1/4" Plywood Panel

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"



#18VG
1/4" V-Groove Plywood Panel

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"



#19
1/4" Plywood Panel

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	10"
2 1/4"	9 1/2"	10"
2 1/2"	10"	10"



#19VG
1/4" V-Groove Plywood Panel

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	10"
2 1/4"	9 1/2"	10"
2 1/2"	10"	10"

INSIDE PROFILE

JF/REGULAR

PRODUCTION

REGENCY

Regency not available on
#19 or #19VG

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL*

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

MISSION

* Cannot bore doors with
Reverse Bevel edge.



#1

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	10"	12"
2 1/4"	10 1/4"	12"
2 1/2"	10 1/2"	12"

INSIDE PROFILE

JF/REGULAR

PANEL

RAISED

REVERSE

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL *

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

MISSION

* Cannot bore doors with Reverse Bevel edge.

**#18PRS**

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"

**#13PRS**

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	10"	11"
2 1/4"	10 1/4"	11"
2 1/2"	10 1/2"	11"

**#30****Drawer Front**

Min. Drawer Height	3"
--------------------	----

#30**Door**

Stile & Rail Size	Minimum Width	Minimum Height
2 3/4"	9"	9"

INSIDE PROFILE

NOTTINGHAM

PANEL

1/4" PLYWOOD PANEL

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL*

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

* Cannot bore doors with Reverse Bevel edge.

INSIDE PROFILE

HA

PANEL

1/4" PLYWOOD PANEL

OUTSIDE PROFILE

HA



#4S

Drawer Front

Top & Bottom Rail 1 1/2" Choice of Stile	Minimum Width	Minimum Height
2"	7"	6"
2 1/4"	7 1/2"	6"
2 1/2"	8"	6"
3"	9"	6"

Door

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"
3"	9"	9"



#4S w/Reverse Double Groove

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"
3"	9"	9"

INSIDE PROFILE

SHAKER

HEAVY SLANT SHAKER

CENTER SLANT SHAKER

SMALL SLANT SHAKER

PANEL

RAISED

REVERSE

REVERSE DOUBLE GROOVE

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL*

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

MISSION

* Cannot bore doors with Reverse Bevel edge.



Skinny Shaker w/Plywood Panel
Drawer Front

Minimum Width	Minimum Height
8"	6 1/8"



Skinny Shaker w/Reverse Panel
Drawer Front

Minimum Width	Minimum Height
8"	6 1/8"



Skinny Shaker w/Plywood Panel
Door


Minimum Width	Minimum Height
8"	8"




Skinny Shaker w/Reverse Panel
Door

Minimum Width	Minimum Height
8"	12"


INSIDE PROFILE



PANEL



OUTSIDE PROFILE

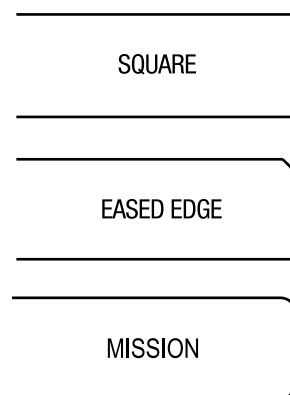



#18S
Drawer Front


Top & Bottom Rail 1 1/2" Choice of Stile	Minimum Width	Minimum Height
2"	7"	6"
2 1/4"	7 1/2"	6"
2 1/2"	8"	6"
3"	9"	6"



#18S
1/4" Plywood Panel

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"
3"	9"	9"


INSIDE PROFILE

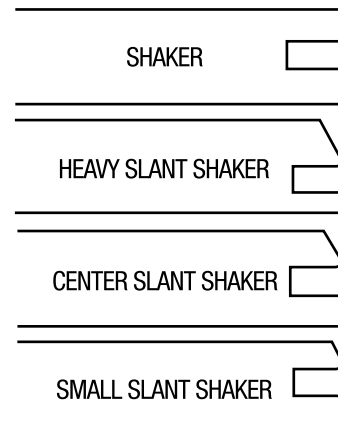

PANEL



OUTSIDE PROFILE

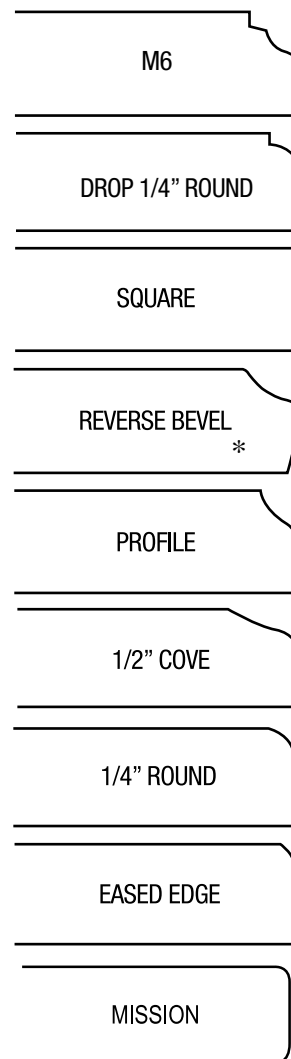

* Cannot bore doors with Reverse Bevel edge.



#31

Stile & Rail Size	Minimum Width	Minimum Height
2 3/4"	10 1/2"	11"



#32

Stile & Rail Size	Minimum Width	Minimum Height
2 3/4"	9"	9"

#33

Drawer Front

Min. Drawer Height	3"
--------------------	----



#33

Door


Stile & Rail Size	Minimum Width	Minimum Height
2 1/4"	7 1/2"	7 1/2"




#34

Stile & Rail Size	Minimum Width	Minimum Height
2 1/4"	10 1/2"	11"


INSIDE PROFILE




PANEL

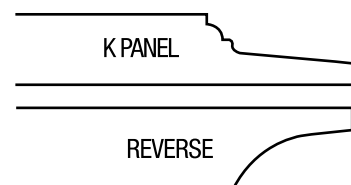


OUTSIDE PROFILE



INSIDE PROFILE



PANEL

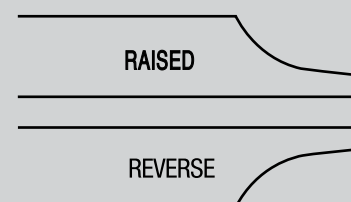

OUTSIDE PROFILE







5 pc. Drawer Front

Top & Bottom Rail 1 1/2" Choice of Stile	Minimum Width	Minimum Height
2"	7"	6"
2 1/4"	7 1/2"	6"
2 1/2"	8"	6"


INSIDE PROFILE

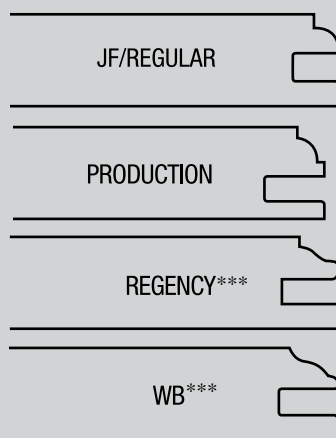


PANEL



SPECIALTY



OUTSIDE PROFILE

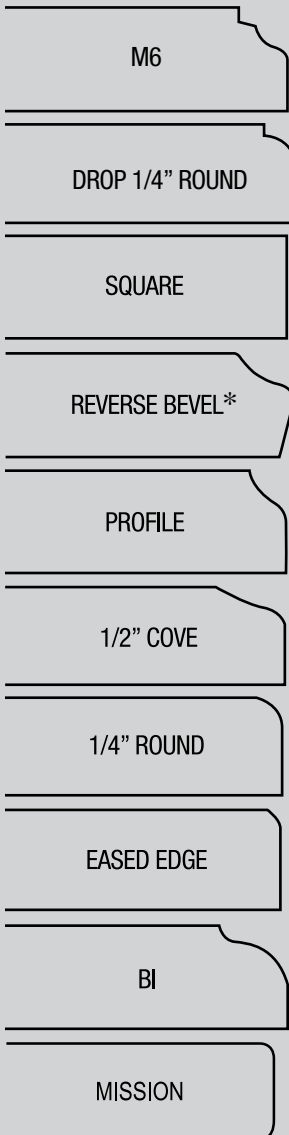

(Production and Jamestown only available with JF/Regular Inside Profile.)

* Cannot bore doors with Reverse Bevel edge.

** No warranty on Drawer Fronts using a 1/4" Plywood Panel


*** When used with Regency or WB inside profile top and bottom rail must be 2" with minimum height of 6-1/2"



Slab Front

Minimum Height 3"

OUTSIDE PROFILE

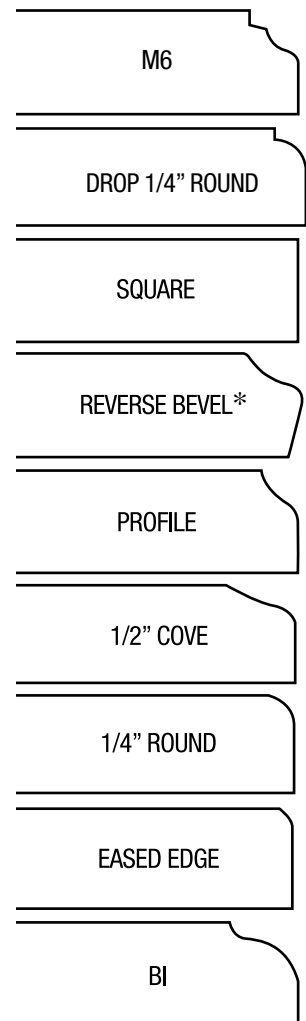

STANDARD DRAWER FRONT

* Cannot bore doors with Reverse Bevel edge.



MITERED DOORS & DRAWERS

FEATURES & BENEFITS

- 9 styles of mitered doors
- Northern Hardwood on most species of wood
- Mortise and Tenon corner construction
- Spacers used on all raised panel doors
- Diamond tooling used for machining consistency
- Doucet clamp system
- All solid panels are produced using standard glue reel process

**M-2****Drawer Front**

Stile & Rail Size	Min. Width	Min. Height
1 1/2"	6 3/8"	5 3/8"

Door

2 1/2"	7 9/16"	8 5/16"
--------	---------	---------

**M-5****Drawer Front**

Stile & Rail Size	Min. Width	Min. Height
1 1/2"	6 3/8"	5 3/8"

Door

2 1/2"	7 9/16"	8 5/16"
--------	---------	---------

**M-10****Drawer Front**

Stile & Rail Size	Min. Width	Min. Height
1 3/4"	6 1/2"	5 1/2"

Door

3"	8 1/4"	8 15/16"
----	--------	----------

M-2*DRAWER
FRONT

DOOR PROFILE

M-5*DRAWER
FRONT

DOOR PROFILE

M-2/M-5 PANEL OPTIONS

SPW

RAISED

REVERSE DOUBLE GROOVE

M-10*DRAWER
FRONT

DOOR PROFILE

M-10

RAISED

NOTTINGHAM

***1/4" Plywood and
Reverse Panel
Options Available**

*No warranty on Drawer Fronts
using a 1/4" Plywood Panel*



M-11

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
1 3/4"	6 9/16"	5 9/16"

Door

2 1/2"	7 3/8"	8 1/16"
--------	--------	---------



M-12

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
1 3/4"	6 9/16"	5 9/16"

Door

3"	8 3/8"	9 1/16"
----	--------	---------



MC-18


Drawer Front

Stile & Rail Size	Min. Width	Min. Height
2 1/8"	7 1/4"	6 1/4"


Door

2 1/2"	7 3/8"	8"
--------	--------	----


M-11*



M-12*



MC-18*



***1/4" Plywood and
Reverse Panel
Options Available**

*No warranty on Drawer
Fronts using a 1/4"
Plywood Panel*

**M-21**

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
Slab	6"	3"

Door

2 1/4"	6 9/16"	6 9/16"
--------	---------	---------

**WSM**

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
1 1/2"	6"	5"

Door

2 1/2"	7 3/8"	7 15/16"
--------	--------	----------

**M-23**

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
1 1/2"	6 9/16"	5 9/16"

Door

2 1/2"	8 3/8"	9 1/16"
--------	--------	---------

M-21*DRAWER
FRONT

DOOR PROFILE

1/4" PLYWOOD PANEL

WSM*DRAWER
FRONT

DOOR PROFILE

WSM PANEL

M-23*DRAWER
FRONT

DOOR PROFILE

REVERSE

RAISED

***1/4" Plywood and
Reverse Panel
Options Available**

*No warranty on Drawer
Fronts using a 1/4"
Plywood Panel*



M-24

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
2 1/8"	6 3/8"	6 3/8"

Door

2 1/2"	8 1/4"	8 15/16"
--------	--------	----------



M-30

Drawer Front

Stile & Rail Size	Min. Width	Min. Height
1 3/4"	6 9/16"	5 9/16"

Door

2 1/2"	8 3/8"	9 1/16"
--------	--------	---------



M-41

Door

Stile & Rail Size	Min. Width	Min. Height
2 1/4"	6 7/8"	7 1/2"

M-24*

DRAWER
FRONT

DOOR PROFILE

REVERSE

RAISED

REVERSE DOUBLE GROOVE

M-30*

DRAWER
FRONT

DOOR PROFILE

REVERSE

RAISED

M-41*

DOOR PROFILE

RAISED

SPW

REVERSE DOUBLE GROOVE

*1/4" Plywood and Reverse Panel Options Available

No warranty on Drawer
Fronts using a 1/4"
Plywood Panel

WOOD FRAME WITH MDF PANEL



#4

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"

INSIDE PROFILE

JF/REGULAR

REGENCY

WB

HA

PRODUCTION

PANEL

RAISED

SPW

REVERSE DOUBLE GROOVE

JAMESTOWN

K PANEL

REVERSE

M-10

Jamestown panel only available with Regular inside profile.

NOTTINGHAM OPTION

NOTTINGHAM

NOTTINGHAM

Nottingham panel only available with Nottingham inside profile.

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA



#3

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"



#1SA

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	9"	11"
2 1/4"	9 1/2"	11"
2 1/2"	10"	11"

INSIDE PROFILE

JF/REGULAR

PANEL

RAISED

REVERSE

REVERSE DOUBLE GROOVE

NOTTINGHAM OPTION

NOTTINGHAM

NOTTINGHAM

Nottingham only available on #3.

OUTSIDE PROFILE

M6

DROP 1/4" ROUND

SQUARE

REVERSE BEVEL

PROFILE

1/2" COVE

1/4" ROUND

EASED EDGE

BI

HA

SOLID MDF PANEL



#4

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2 1/4"	9"	9"



#3

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2 1/4"	10"	10"



#1SA

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2 1/4"	10"	10"



5 pc. Style Front

Top & Bottom Rail 1 1/2" Choice of Stile	Minimum Width	Minimum Height
2 1/4"	7 1/2"	6"



Slab Front

Min. Drawer Height	3"
--------------------	----

INSIDE PROFILE

REGULAR

PANEL PROFILE

RAISED

OUTSIDE PROFILE

1/2" COVE

EASED EDGE

SQUARE

DROP 1/4" ROUND



#4S MDF

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2"	7"	7"
2 1/4"	7 1/2"	7 1/2"
2 1/2"	8"	8"
3"	9"	9"



#4SVG MDF

Drawer Front

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2-1/2" side / 1-1/2" top/bottom	8"	6"

Door

2 1/2"	8 1/4"	8 1/4"
--------	--------	--------

INSIDE PROFILE

SHAKER

HEAVY SLANT SHAKER

CENTER SLANT SHAKER

SMALL SLANT SHAKER

OUTSIDE PROFILE

1/2" COVE

EASED EDGE


SQUARE

DROP 1/4" ROUND

INSIDE PROFILE

SQUARE
(NO EXCEPTION)

PANEL PROFILE



OUTSIDE PROFILE

1/2" COVE

EASED EDGE

SQUARE

DROP 1/4" ROUND



Skinny Shaker

Choice of Stile & Rail Size	Minimum Width	Minimum Height
1"	8 1/4"	8 1/4"

INSIDE PROFILE

SKINNY SHAKER

OUTSIDE PROFILE

EASED EDGE

SQUARE



50

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2 1/2"	8 1/4"	8 1/4"



51

Choice of Stile & Rail Size	Minimum Width	Minimum Height
2 1/2"	8 1/4"	8 1/4"

INSIDE PROFILE

50

51

PANEL PROFILE

50

OUTSIDE PROFILE


50 & 51

NOTE: The radius on both 50 and 51 has a flat top. It is not completely rounded.




FIXED WOOD MULLION


Fixed Mullions are available in:




4 Lite Mullion



6 Lite Mullion




8 Lite Mullion



Prairie Lite Mullion


WOOD GRID INSERTS

Grid Inserts are available in:

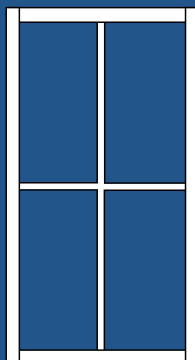


4 Lite Grid Insert

Min Width	Min Height
12"	12"
Max Width	Max Height
23"	45"

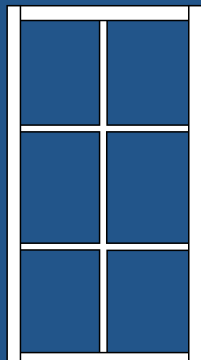


6 Lite Grid Insert

Min Width	Min Height
12"	14"
Max Width	Max Height
23"	45"

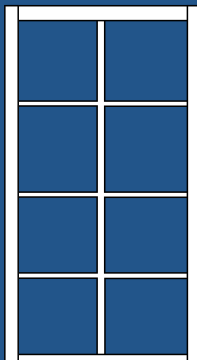

8 Lite Grid Insert

Min Width	Min Height
12"	20"
Max Width	Max Height
23"	45"

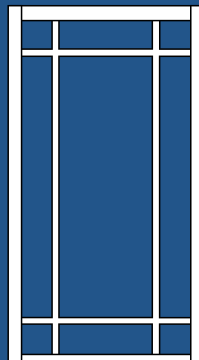

Prairie Lite Grid Insert

Min Width	Min Height
14"	20"
Max Width	Max Height
23"	45"


COPE & STICK



JF/REGULAR

Fixed Mullions available **ONLY** with Regular Inside Profile.


Regular Inside Profile = Regular Mullion.



NOTTINGHAM

Nottingham Profile = Nottingham Mullion

MITERED




WSM

Fixed Mullion available only in one miter door.

WSM door = WSM mullion

**Mullions not available in solid MDF frame*

GRID INSERTS




SQUARE


**Grid inserts not available with solid MDF frame*

Available in 5.2mm MDF and 5.2mm Hardwood Plywood


- CNC Grid Inserts are available in all Square Door Styles.
- CNC grids not available with solid MDF frame.

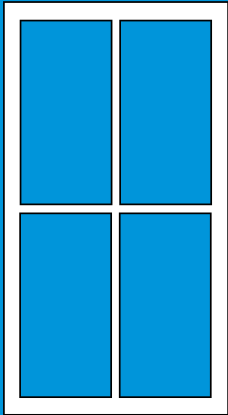**4 Lite Grid**


Minimum door size - 12"w x 12"h
Maximum door size - 23"w x 45"h

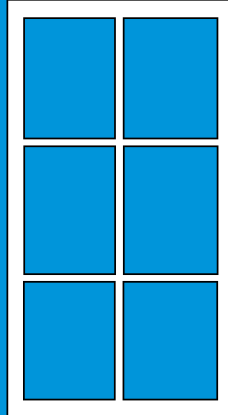**6 Lite Grid**


Minimum door size - 12"w x 14"h
Maximum door size - 23"w x 45"h

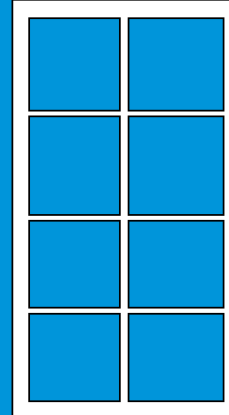**8 Lite Grid**


Minimum door size - 12"w x 20"h
Maximum door size - 23"w x 45"h

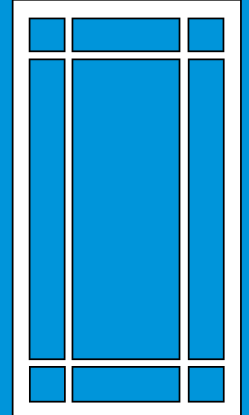**Prairie Lite Grid**


Minimum door size - 14"w x 20"h
Maximum door size - 23"w x 45"h

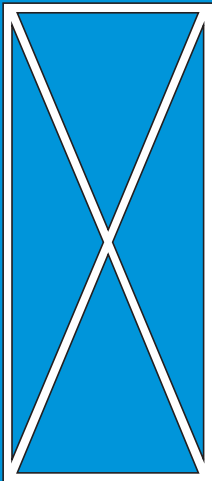**X-Lite Grid**


Minimum door size - 12"w x 12"h
Maximum door size - 23"w x 45"h

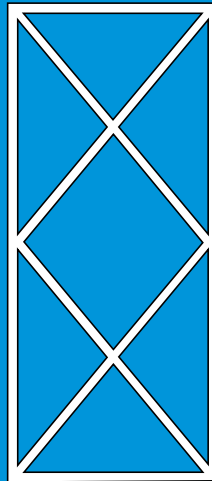**Double X-Lite Grid**


Minimum door size - 12-3/4"w x 27"h
Maximum door size - 23"w x 45"h

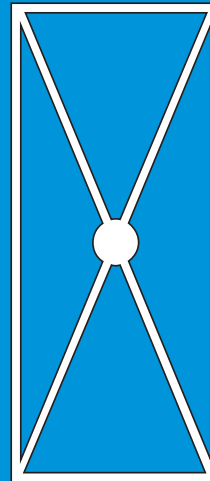**X-Lite Solid Hub Grid**


Minimum door size - 12-3/4"w x 27"h
Maximum door size - 23"w x 45"h

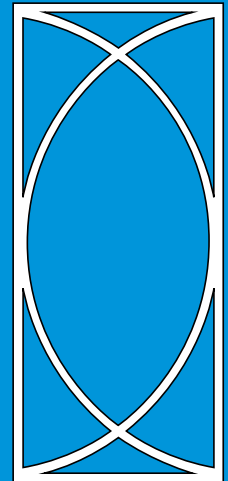**Vesica Grid**


Minimum door size 12-3/4"w x 27"h
Maximum door size 23"w x 45"h

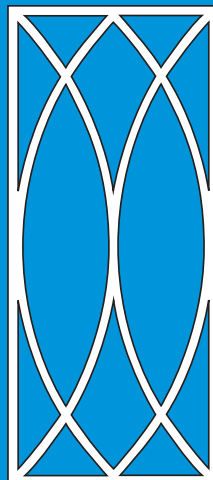**Double Arch Grid**


Minimum door size 12-3/4"w x 27"h
Maximum door size 23"w x 45"h

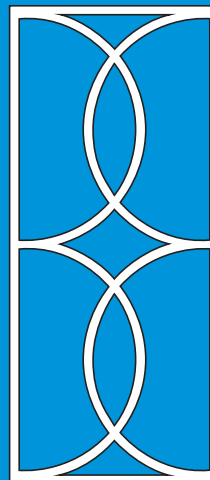**2C-M Grid**

Minimum door size 12-3/4"w x 27"h
Maximum door size 23"w x 45"h

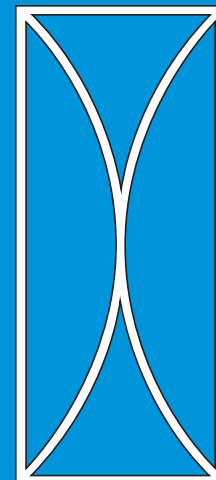**Double Bow Grid**

Minimum door size 12-3/4"w x 27"h
Maximum door size 23"w x 45"h

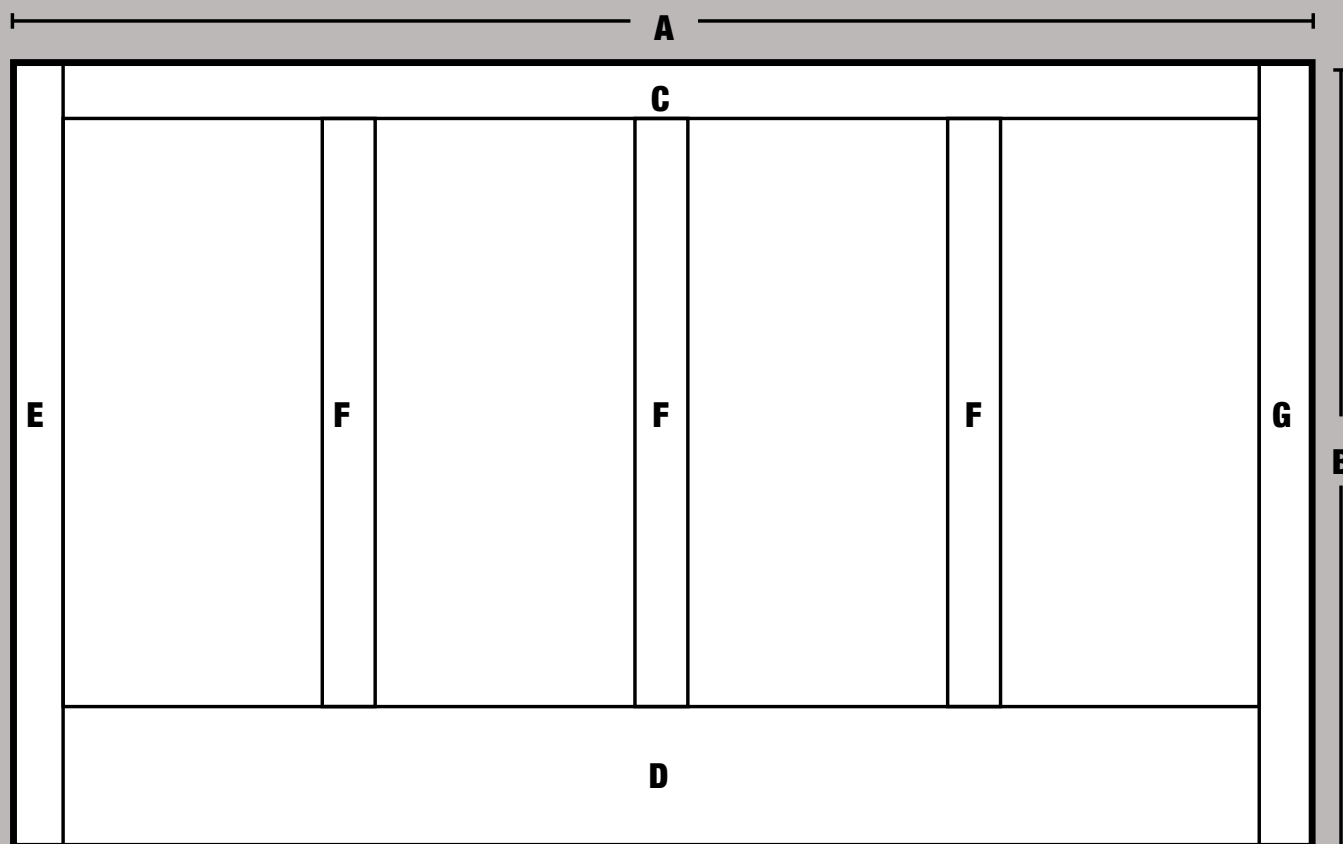

COPE & STICK WAINSCOTTING CUSTOM ORDERING

Step #1 - Choose Style

Step #2 - Choose Wood Species

Step #3 - Measurements

A - Overall Width

B - Overall Height

C - Top Rail Height

D - Bottom Rail Height

E - Left Stile Width

F - Interior Stile Width

G - Right Stile Width




Step #4 - Indicate number of equal panels

**PLEASE USE ORDER FORM IN BACK
(PAGE 37)**

** No miter style wainscoting.*

** The default outside edge profile is square.*

VALANCES

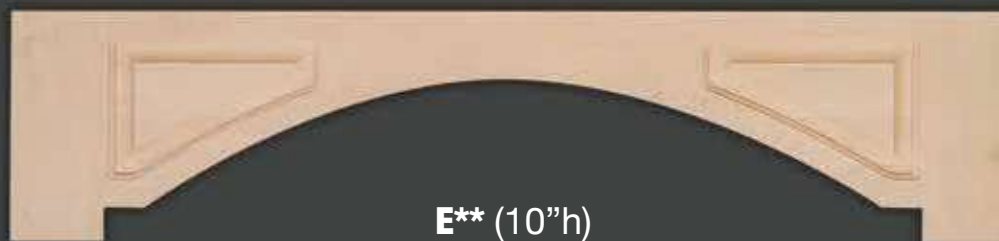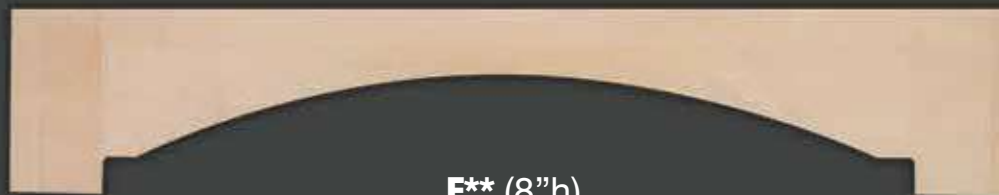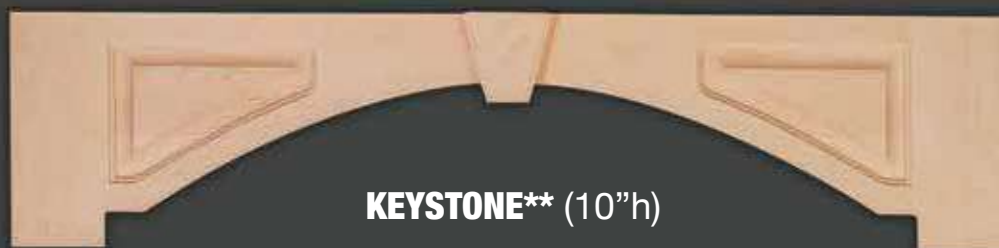**B*** (71/2"h)**D**** (9"h)**E**** (10"h)**F**** (8"h)**G*** (10"h)**KEYSTONE**** (10"h)

All styles
available in
Solid MDF

Models D, E and Keystone are available in the following panels: Regular Raised, SPW, WSM, 1/4" Plywood and Reverse Panel. Type D Valance is only valance that can come with Nottingham inside profile and panel.

All valances are available with Regular inside profile.

4 Sizes (36 1/4, 42 1/4, 48 1/4, 54 1/4) • Ask About Our Custom Work

(\$50 Template Charge if not a Standard Valance)


* Solid piece. ** Assembled

MOULDING

300' minimum order per profile



CM8
4 1/8" Crown

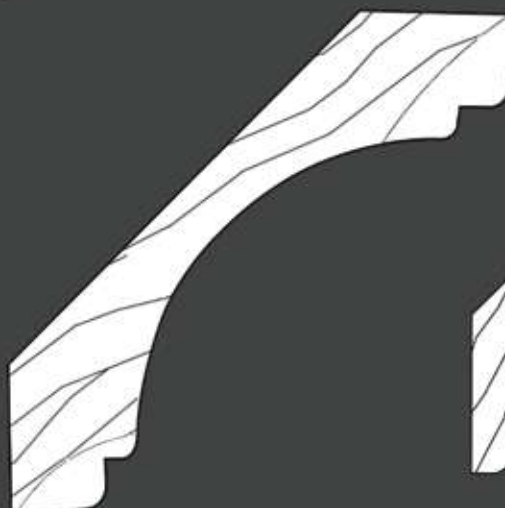

CM50
3 3/4" Crown



CM48
3 1/2" Crown



CM52
2 3/4" Crown



CMFP2
13/16" x 2"
Face Frame



CM903
Lite Rail



GENERAL INFORMATION

- Pre- Finished UV coating
- 5/8" Hardwood
- 1/4" and 1/2" Import Birch Bottoms Available
- Comes Assembled
- Notched and Drilled if needed
- Lead times: 5-7 business days

Dimensions Available:

Depths 12", 15", 18", 21"

Heights 2 1/2", 3 3/8", 4", 5 7/8", 8", 9 5/8"

All drawer boxes over 26" wide will have a support center rail underneath box with the exception of the 1/2" Import Birch Bottom

(See order form on page 38)

- Maximum width 42"
- Minimum width 5"



OPTIONS:

1. Highback boxes with slanted sides
2. Handpulls with front scoop

LIMITED WARRANTY

Cullman Cabinet & Supply Company, Inc. manufactures and ships UNFINISHED wood products primarily within the Southeast United States. **ONCE OUR PRODUCTS ARE RECEIVED, IT IS IMPOSSIBLE FOR US TO MONITOR THE CONDITIONS UNDER WHICH THEY ARE KEPT.**

Claims on any order or material discrepancies must be made within three (3) days after receipt of order prior to **HINGING, HANGING, or FINISHING.**

Doors are not to be returned without prior written approval of Cullman Cabinet. After approval, doors must be returned in their original condition to the offices of Cullman Cabinet for inspection. Any item that has been hinged, hung, or finished, shows signs of exposure to moisture, heat or sun, shows signs of job site neglect, or is modified in any way shall be deemed accepted by the buyer and voids any warranty.

If our product is handled in accordance with our recommended guidelines, most problems will be minimized. Remember, you are dealing with an unfinished wood product that will warp, twist, or crack within 24 hours if not treated or handled properly.

MITER WARRANTY

- Mitered doors allow a .010" joint gap 1" from the inside bead.
- Mitered doors are not warranted against joint separations that occur as a result of high humidity or moisture conditions. Water based paints are not recommend on mitered profiles.

Limited Warranty covers material only. Material will be reworked, replaced or credited, whichever is feasible.

GUARANTEE

Products must be inspected upon receipt. Our guarantee covers the replacement of doors and drawer fronts in an unfinished state and in good condition, as originally delivered F.O.B. our factory. Any variation from our normal construction specifications is not guaranteed, i.e., reducing the thickness of the panel or frame.

- A warp or twist of 3/16th of an inch or less is not considered a defect. A twist is measured by placing the face of the door against a true plane surface.
- Dimensions are within 1/16" (+ or -).
- Material free from splits in open joints.
- Variance in color is not considered a defect.
- Doors at 46" in height will automatically receive a horizontal center rail unless otherwise noted.
- Doors over 46" in height and 23" in width will not be warranted against warping.
- Doors with 1/4" plywood panel will receive a vertical center stile upon request.

Cullman Cabinet & Supply Company, Inc. will not be held responsible for delays caused by factors beyond our control (i.e., obstruction or blockage of usual routes of transportation, unavoidable accidents, riots, natural disasters, vehicle shortages, prevention of labor, power shortages or lack of materials.) There are no other warranties of any other kind expressed or implied.

VALANCE ORDER FORM

Customer: _____

Order Date: _____

PO# _____

Phone: _____

Model/Style: _____

Comments: _____

Panel

☐ Reg. Raised ☐ Nottingham ☐ SPW ☐ WSM

☐ 1/4" Plywood ☐ Reverse Panel


Inside Edge

☐ Reg. Raised ☐ Nottingham

A. Overall Length _____

B. Overall Height _____

C. Stile Width _____

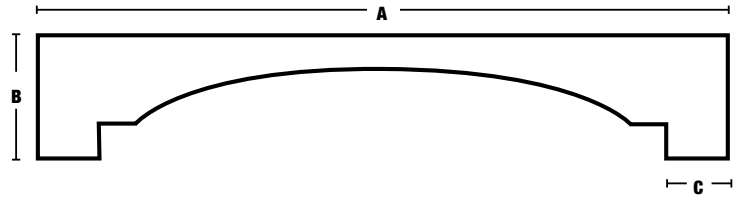

\$50 Template Charge if not a standard valance.

Standard valance sizes - 36 1/4", 42 1/4", 48 1/4" and 54 1/4"

MOULDING ORDER FORM

300' minimum order per profile

Customer: _____

Order Date: _____

PO# _____


Phone: _____

	Style	Species of Wood	Footage	Lengths*	Sub Packs*
1					
2					
3					
4					
5					

* Lengths 8' - 12' only - Select lengths have an upcharge

* Sub Packs is a special service with an upcharge

BORE FOR EUROPEAN HINGES

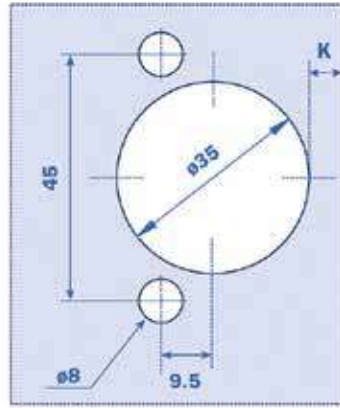

BORING PATTERN

- K = 2.5 mm
- 106° Face Frame 2.5 mm

NOTE: 2 1/4" minimum stile width to bore hinges

Will not bore any door 8-1/2" or shorter

Center of cup 3-1/2" from the top and bottom of the door

- 35mm bore
- 7/16" deep

Doors up to 36" high = 2 hinges
Doors from 36-1/16" to 60" high = 3 hinges
Doors from 60-1/16" to 84" high = 4 hinges
Compact hinges - standard and soft close

Boring not available in reverse bevel and raised bead profiled mitered doors.

NOTES

DOOR & DRAWER ORDER FORM

Customer: _____

PO# _____

Door Style: _____

Panel: _____

Wood Type: _____

Inside Profile: _____

Outside Profile: _____

Stiles/Rails: _____

Boring For Hinges: Yes No

Add Hinges: Yes No

Hinge Type: Standard Soft Close

Order Date: _____

Delivery Date: _____

Phone: _____

Comments: _____

Drawer Fronts _____

Outside Profile: _____

5 PC Front _____ Slab _____

Boring not available in raised bead profiled mitered doors.

Cullman will not bore any door with 2" stiles or shorter than 8-1/2".

Doors

	Quantity	Width x Height
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		

Drawer Fronts

Quantity	Width x Height

Reminder: Any doors 46" and over in height will automatically receive a horizontal center rail unless otherwise noted.
 Raised or reversed panel doors 25" and over in width will automatically receive a vertical center stile, unless noted.
 Doors with 1/4" plywood will receive a vertical center stile upon request.

WAINSCOTTING/CUSTOM PANEL ORDER FORM

Customer: _____

PO# _____

Door Style: _____ **Panel:** _____

Wood Species: _____

Inside Edge: _____

Outside Edge: _____

Measurements: A. Overall Width _____

B. Overall Height _____

C. Top Rail Height _____

D. Bottom Rail Height _____

E. Left Stile Width _____

F. Interior Stile Width _____

G. Right Stile Width _____


Number of Panels _____

Order Date: _____

Phone: _____


Comments: _____

Quantity: _____

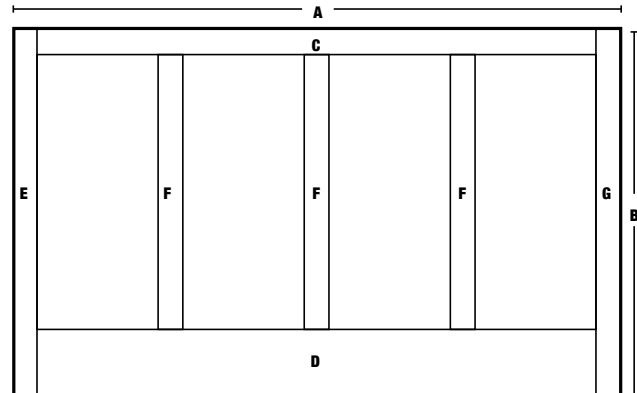

Not Available in Mitered Panels.
The default outside edge is square.

When ordering a wainscot panel, submit a drawing (on the grid provided below) showing the overall dimensions, the width of each of the stiles and rails, and the distance between the stiles and/or rails. If all panels are equal, please note "equal" on each panel. When noting distance, please also note to what part of the stile and/or rail your dimension is specifying.

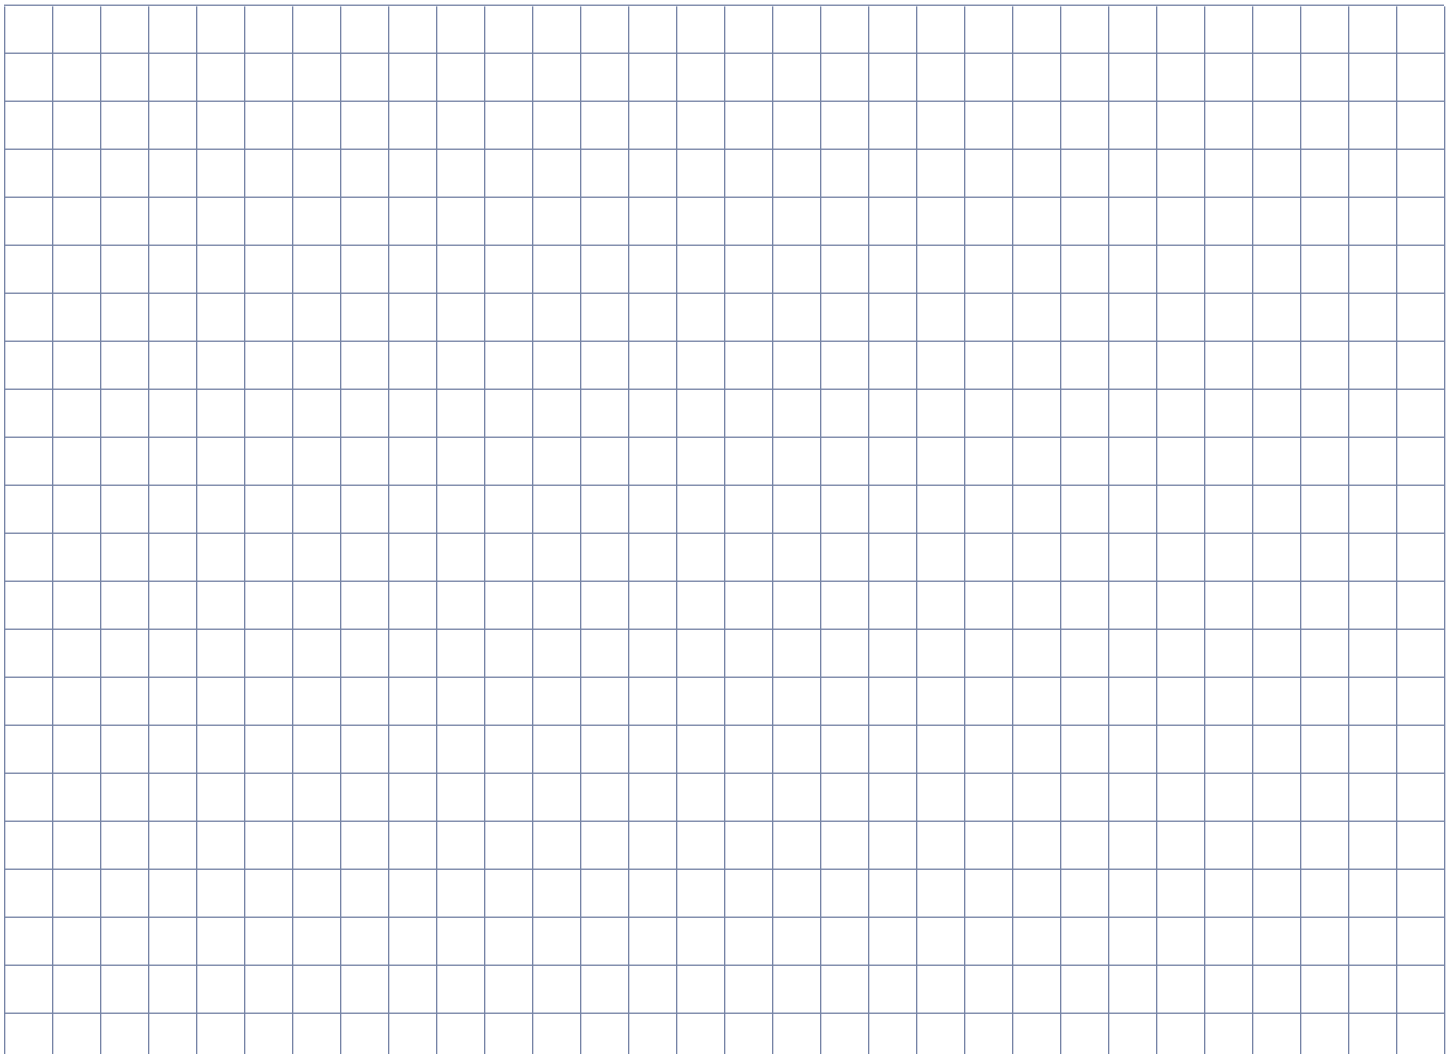

DOVETAIL DRAWER ORDER FORM

Date: _____

PO#: _____

Company: _____

Phone: _____

Contact: _____

Fax: _____

Address: _____

Email: _____

STANDARD DOVETAIL DRAWER BOX

- *Pre- Finished UV coating*
- *5/8" European Beech*
- *1/4" Import Birch Bottom*

- *Assembled*
- *Notched and Drilled if needed*

Depths - 12", 15", 18", 21" • Heights - 2 1/2", 3 3/8", 4", 5 7/8", 8", 9 5/8"
Notched and Drilled for Undermount Slides

Circle your choice: NOTCH NO NOTCH

	Quantity	Outside Width	Outside Depth	Outside Height	Cab #	Hand Pull
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

HIGHBACK DOVETAIL DRAWER BOX

Depths - 18", 21" • Heights - 5 7/8" back with 3-3/8" front, 8" back with 4" front
Notched and Drilled for Undermount Slides (5-7/8" or 8" only)

Circle your choice: NOTCH NO NOTCH

	Quantity	Outside Width	Outside Depth	Outside Height	Cab #	Hand Pull
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

Reminder: All drawer boxes over 26" wide will have a support center rail underneath box.

Cullman Cabinet
& Supply
C O M P A N Y

P.O. Box 1150 • Cullman, Alabama 35056
(256) 734-1540 • FAX (256) 739-2682
www.cullmancabinet.com